


Gamma Match Mounting


- 1) Fix without locking the flat end of the gamma-match by using the supplied nut and washer.
- 2) Insert the opposite side (Æ8) of gamma match in the tuning element and fix it at L1 by means of the enclosed hardware.
- 3) Check that the last part of your gamma match (Æ8mm) is correctly positioned at L2 and fix it with hardware.
- 4) Lock the nut on the flat end of the gamma match and mount the PVC cap.

Gamma Match parts list	
Q.ty	Description
2	M6x6 Hexagon socket set screw
1	3mm Hexagonal Key
1	Æ 8 mm PVC cap
2	M6 Flat washer
1	M6 Grower washer
1	M6 Hexagonal nut
1	Tuning element

Re-order code: SA090

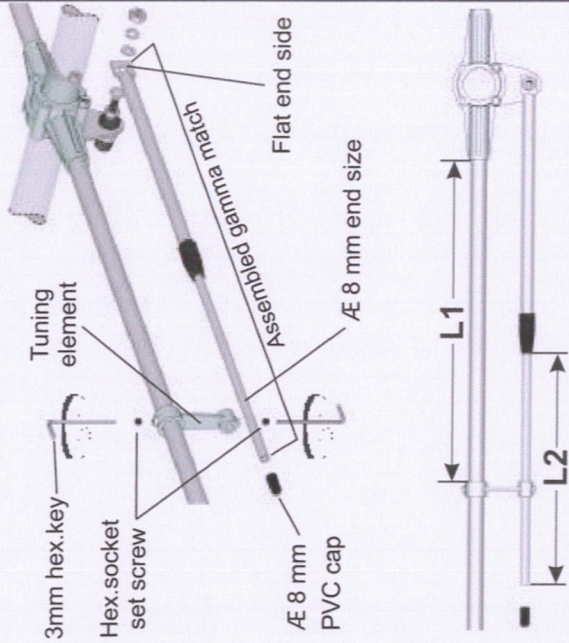

SD/SY Mounting bracket

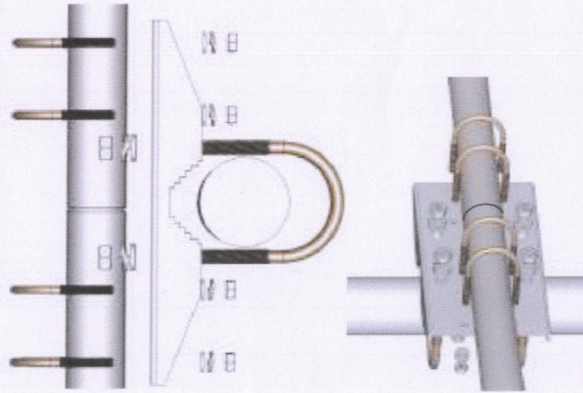

SD/SY bracket parts list	
Q.ty	Description
1	SD/SY Steel bracket
2	M8x200 U-bolt
4	M8 Hexagonal nut
4	M8 Grower washer
4	M8 Flat washer
4	M6x125 U-bolt
8	M6 Hexagonal nut
8	M6 Grower washer
8	M6 Flat washer

Materials: Zinc Plated Steel

Weight: 865 gr


Re-order code: SA088

SY-3

26.5 30 MHz Tunable 3 Element Yagi Antenna

WARNING

INSTALLATION OF THIS PRODUCT NEAR POWER LINES IS DANGEROUS. FOR YOUR SAFETY AND BEFORE YOU BEGIN INSTALLATION, READ THE SEPARATE SAFETY INFORMATION SHEET.

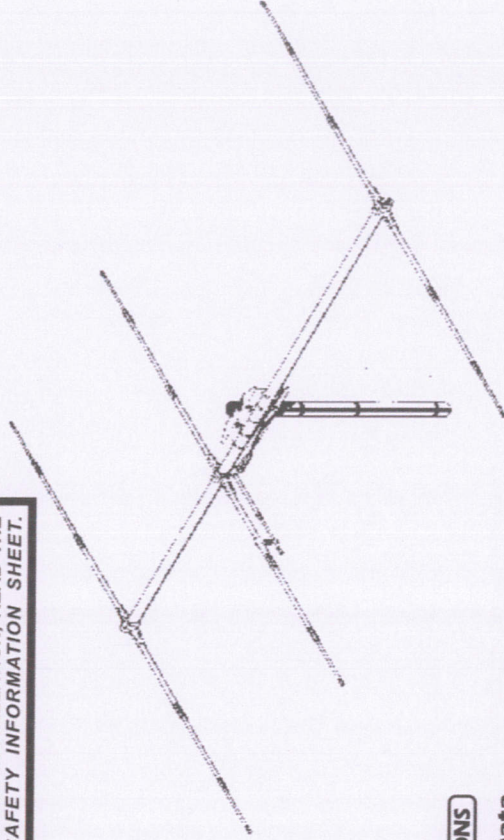

SPECIFICATIONS

Electrical Data

Type	3 Element Yagi Beam Antenna
Frequency Range	26.5 ... 30 MHz tunable (see table)
Impedance	50 W
Radiation	Directional
Polarization	Linear Horizontal
Front to Back ratio	≥ 20 dB
Gain	8.5 dBi - 10.65 dBi
Bandwidth @ SWR ≤ 2	≥ 1200 KHz @ 26.5 MHz
SWR @ res. freq.	≤ 1.2
Max Power	1000 Watts (CW) continuous 3000 Watts (CW) short time
Connector	UHF-female

Mechanical Data

Materials	Aluminium, EPDM rubber, Zamak, Zinc plated steel, Chromed brass
Wind Load / Resistance	86 N @ 150 Km/h / 120 Km/h
Wind surface	0.07 m²
Dimensions (approx.)	5942 x 2710 x 100 mm
Boom Length/Diameter	2710 mm / Æ 33 mm
Max. element length	5942 mm
Element diameter	Æ 8-12-16 mm
Turning radius	3300 mm
Weight (approx.)	4700 gr
Mounting mast	Æ 35-50 mm side mast with "U" bolt



SIRIO
antenne

HI-QUALITY ANTENNAS MADE IN ITALY

© Copyright SIRIO antenne - Technical Data are subjected to change - Printed in ITALY - Rev. 08/04/2025 - Cod. ID098