



ACOUSTIC
CONSULTANTS LTD

Noise Impact Assessment

Proposed acoustic fencing at Gatehouse Farm

Reference: 11300/DO

Client:**Document Control**

Version:	Revision Description:	Date:	Author:	Reviewed by:	Approved by:
1.0	-	31/03/2025	Daniel Oldaker, MIOA	Blake Lucas, MIOA	Blake Lucas, MIOA

The report has been prepared in good faith, with all reasonable skill and care, based on information provided or available at the time of its preparation and within the scope of work agreement with the Client. We disclaim any responsibility to the Client and others in respect of any matters outside the scope of the above. The report is provided for the sole use of the named Client and is confidential to them and their professional advisors. No responsibility is accepted to other parties.

The report limits itself to addressing solely on the noise, acoustic, and vibration aspects as included in this report. We provide advice only in relation to noise, vibration and acoustics. It is recommended that appropriate expert advice is sought on all the ramifications (e.g. CDM, structural, condensation, fire, legal, etc.) associated with any proposals in this report or as advised and concerning the appointment. It should be noted that noise predictions are based on the current information as we understand it and, on the performances noted in this report. Any modification to these parameters can alter the predicted level. All predictions are in any event subject to a degree of tolerance of normally plus or minus three decibels. If this tolerance is not acceptable, then it would be necessary to consider further measures.

Table of Contents

1.	Introduction	4
2.	The Site	5
3.	Planning and Noise	6
4.	Assessment Criteria	10
5.	Noise Emission Prediction	11
6.	Appendix 1 – Glossary of Acoustic Terminology	13

1. Introduction

Denton Homes Limited appointed Acoustic Consultants Limited to undertake a review of the acoustic fencing proposals between their residential Gatehouse Farm development site and the adjacent Burgess Hill Centre for Sport which includes a number of football pitches close to the site.

Acoustic Consultants Ltd undertook the noise impact assessment for the Burgess Hill development and recommended an acoustic barrier along part of the boundary. This was based on the existing site layout and not the permitted residential development scheme.

KP Acoustics undertook a separate noise impact assessment for the Gatehouse Farm site and recommended a more extensive acoustic barrier which included additional acoustic fencing behind the Burgess Hill acoustic fence.

For reasons of buildability, maintenance, safety and to avoid the unnecessary use of materials, Acoustic Consultants Ltd have been instructed to review the scheme and determine whether the proposed section of barrier behind the Burgess Hill barrier is required to protect residential amenity.

The assessment is based on the noise modelling undertaken as part of the Burgess Hill application to determine whether the double barrier element is effective or necessary.

This report has been prepared by a Member of the Institute of Acoustics (MIOA with over 19 years' experience in the industry and is a Director of the company.

2. The Site

Gatehouse Farm is a proposed residential development of five residential properties on land at Gatehouse Farm. The site is rectangular in form and runs North/South along the boundary with the Burgess Hill Centre for Sport.

The Burgess Hill Centre for Sport development two new artificial grass pitches (AGP) with associated floodlighting and perimeter fencing to the North of the site. To the South of the site are four grass pitches which are no floodlit and for which no structures are associated.

The Burgess Hill Centre for Sport development includes an acoustic fence running for approximately 96 metres from the southern end of the site boundary, this fence is 2.5m in height.

The Gatehouse Farm development also includes an acoustic barrier, this extends along the Eastern and Northern boundaries of the site (the boundary shared with the sports site) and is also 2.5m in height.

Section 5.2 of the KP noise impact assessment states that this is separate from the sports centre acoustic barrier.

3. Planning and Noise

3.1. National Planning Policy Framework

The National Planning Policy Framework (NPPF) was published in March 2012 and revised in December 2024. Section 15 entitled 'Conserving and enhancing the natural environment' addresses noise as a requirement of planning. Paragraph 187 states:

"187. Planning policies and decisions should contribute to and enhance the natural and local environment by:

e) preventing new and existing development from contributing to, being put at unacceptable risk from, or being adversely affected by, unacceptable levels of soil, air, water or noise pollution or land instability. Development should, wherever possible, help to improve local environmental conditions such as air and water quality, taking into account relevant information such as river basin management plans; and."

Paragraph 198 states:

"198. Planning policies and decisions should also ensure that new development is appropriate for its location taking into account the likely effects (including cumulative effects) of pollution on health, living conditions and the natural environment, as well as the potential sensitivity of the site or the wider area to impacts that could arise from the development. In doing so they should:

a) mitigate and reduce to a minimum potential adverse impacts resulting from noise from new development – and avoid noise giving rise to significant adverse impacts on health and the quality of life

b) identify and protect tranquil areas which have remained relatively undisturbed by noise and are prized for their recreational and amenity value for this reason; and

c) limit the impact of light pollution from artificial light on local amenity, intrinsically dark landscapes and nature conservation. "

The document does not prescribe any assessment methodology or criteria to assess the adverse effect of noise and refers you to the NPSE.

3.2. Noise Policy Statement for England

The NPPF refers to the Noise Policy Statement for England (NPSE). This was published in March 2010 and aims to provide clarity regarding current policies and practices to enable noise management decisions to be made within the wider context, at the most appropriate level, in a cost-effective manner and in a timely fashion and applies to all forms of noise including environmental noise, neighbour noise and neighbourhood noise.

The NPSE sets out the long term vision of Government noise policy. This long term vision is supported by three noise policy aims as follows:

"Through the effective management and control of environmental, neighbour and neighbourhood noise within the context of Government policy on sustainable development:

- avoid significant adverse impacts on health and quality of life;*
- mitigate and minimise adverse impacts on health and quality of life; and*
- where possible, contribute to the improvement of health and quality of life."*

The NPSE introduces the concept of "Significant adverse" and "Adverse" impacts of noise which relate to the noise policy aims. These are applied as follows:

NOEL – No Observed Effect Level

This is the level below which no effect can be detected. In simple terms, below this level, there is no detectable effect on health and quality of life due to the noise.

LOAEL – Lowest Observed Adverse Effect Level

This is the level above which adverse effects on health and quality of life can be detected.

SOAEL – Significant Observed Adverse Effect Level

This is the level above which significant adverse effects on health and quality of life occur.

The Noise Policy Statement for England (NPSE) states that noise levels above the Lowest Observed Adverse Effect Level are acceptable in planning where reduced to a minimum.

With regard to where there is potential for noise impact it states the following in relation to the second noise policy aim:

"The second aim of the NPSE refers to the situation where the impact lies somewhere between LOAEL and SOAEL. It requires that all reasonable steps should be taken to mitigate and minimise adverse effects on health and quality of life while also taking into account the guiding principles of sustainable development (paragraph 1.8). This does not mean that such adverse effects cannot occur."

The NPSE does not provide any assessment criteria for the noted effect levels and each case must be considered on its merits.

The NPSE does, however, emphasise that in dealing with noise Local Planning Authorities are required to take a balanced approach in considering the benefits of development as against any adverse effects which arise. Paragraph 2.18 of the NPSE is particularly relevant in this respect and states:

"There is a need to integrate consideration of the economic and social benefits of the activity or policy under examination with proper consideration of the adverse environmental effects, including the impact of noise on health and quality of life. This should avoid noise being treated in isolation in any particular situation, i.e. not focusing solely on the noise impact without taking into account other related factors."

The planning need is outside the scope of noise and acoustics and will need to be addressed by others.

3.3. Planning Practice Guidance, Noise

The Planning Practice Guidance (PPG) on noise referred to here is based on the current version (January 2019) as provided on the Planning Guidance Website. It states that, *"Noise needs to be considered when new developments may create additional noise and when new developments would be sensitive to the prevailing acoustic environment."*

It provides generic guidance on how to determine the noise impact and what factors could be a concern.

It includes the option types to mitigate any adverse effects of noise stating that there are four broad types of mitigation. These are engineering, layout, using planning conditions or obligations and noise insulation.

Paragraph 5 of the PPG provides a table identifying the effect level and examples of effect relating to the impact effect levels provided in the NPSE. The table is duplicated below:

Table 1: PPG Noise – Perception of Effect Levels

Perception	Examples of Outcomes	Increasing Effect Level	Action
No Observed Effect Level			
Not present	No Effect	No Observed Effect	No specific measures required
No Observed Adverse Effect Level			
Present and not intrusive	Noise can be heard, but does not cause any change in behaviour, attitude or other physiological response. Can slightly affect the acoustic character of the area but not such that there is a change in the quality of life	No Observed Adverse Effect	No specific measures required
Lowest Observed Adverse Effect Level			
Present and intrusive	Noise can be heard and causes small changes in behaviour, attitude or other physiological response, e.g. turning up volume of television; speaking more loudly; where there is no alternative ventilation, having to close windows for some of the time because of the noise. Potential for some reported sleep disturbance. Affects the acoustic character of the area such that there is a small actual or perceived change in the quality of life.	Observed Adverse Effect	Mitigate and reduce to a minimum
Significant Observed Adverse Effect Level			
Present and disruptive	The noise causes a material change in behaviour, attitude or other physiological response, e.g. avoiding certain activities during periods of intrusion; where there is no alternative ventilation, having to keep windows closed most of the time because of the noise. Potential for sleep disturbance resulting in difficulty in getting to sleep, premature awakening and difficulty in getting back to sleep. Quality of life diminished due to change in acoustic character of the area.	Significant Observed Adverse Effect	Avoid
Present and very disruptive	Extensive and regular changes in behaviour, attitude or other physiological response and/or an inability to mitigate effect of noise leading to psychological stress, e.g. regular sleep deprivation/awakening; loss of appetite, significant, medically definable harm, e.g. auditory and non-auditory.	Unacceptable Adverse Effect	Prevent

The table does not provide any objective assessment which equates to the noted effect levels. However, the PPG identifies that where noise is audible, it is not necessarily intrusive. The effect and impact on people are based primarily on the level of noise.

4. Assessment Criteria

The proposal is to remove the section of acoustic fence from the Gatehouse Farm development that is directly behind the sports centre acoustic fence.

To determine the impact of this it is considered appropriate to determine the impact on noise levels that this will have.

The Institute of Environmental Management and Assessment (IEMA) Guidelines for Environmental Noise Impact Assessment, Version 1.2 published in November 2014 categorises the significance of a change in noise level, this is summarised as follows and taken from Table 7-14 of the guidance.

Table 2: IEMA Impact from the Change in Sound Levels (Table 7-14)

Sound Level Change LpT	Long-term impact classification	Short-term impact classification
≥ 0 dB and < 1 dB	Negligible	Negligible
≥ 1 dB and < 3 dB		Minor
≥ 3 dB and < 5 dB	Minor	Moderate
≥ 5 dB and < 10 dB	Moderate	Major
≥ 10 dB	Major	

We would consider that where there is a negligible change it would have no observed effect on the residential amenity of the proposed dwellings and no change in the design intent of the proposed scheme.

5. Noise Emission Prediction


To predict noise levels with both barrier configurations we have undertaken noise emission predictions using the noise modelling from the Burgess Hill Centre for Sport noise impact assessment which was submitted as part of that planning application.

Two separate noise models have been created, one with the two separate barriers and another with the preferred barrier configuration where the Gatehouse Farm barrier does not extend behind the sports centre barrier.

The noise model then has been used to calculate the difference between the two models.

The result of these predictions and calculation are shown on the noise map below.

Figure 1: Predicted AGP Noise Emission (1.5 metres above the ground).

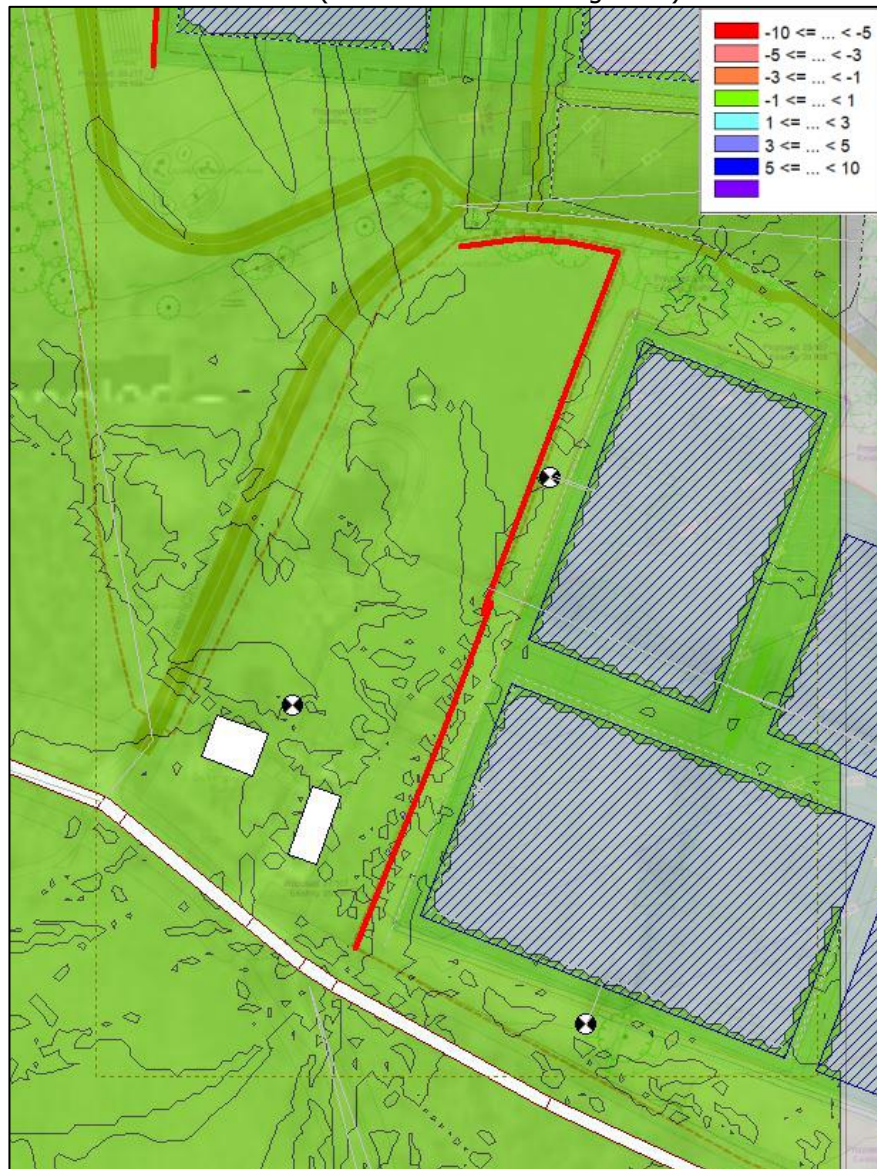

* To ensure there is no significant transmission of noise through the gap between the two fences there should be a minimum overlap of 4 metres, or twice the distance between the two fence lines (whichever is greater).

Based on the noise predictions and calculation the removal of the Gatehouse Farm barrier from behind the sports centre barrier results in a difference of +/- 1 decibel across the site.

According to the IEMA guidelines, this is negligible and would have no observed effect on the residential amenity of the proposed dwellings and no change in the design intent of the proposed scheme.

As such, it is concluded that the Gatehouse Farm barrier can be removed from behind the sports centre barrier (apart from the overlap as stated above) without any adverse effect on residential amenity or the use of the sports centre.

6. Appendix 1 – Glossary of Acoustic Terminology

A-weighted sound pressure p_A – value of overall sound pressure, measured in pascals (Pa), after the electrical signal derived from a microphone has been passed through an A-weighting network.

A-weighted sound pressure level, L_{pA} – quantity of A-weighted sound pressure given by the following formula in decibels (dBA)

$$L_{pA} = 10 \log_{10} (p_A/p_0)^2$$

where:

p_A is the A-weighted sound pressure in pascals (Pa);
 p_0 is the reference sound pressure (20 μ Pa)

Background sound level, $L_{A90,T}$ – A-weighted sound pressure level that is exceeded by the residual sound assessment location for 90% of a given time interval, T, measured using weighting F and quoted to the nearest whole number of decibels

Break-in - noise transmission into a structure from outside.

Decibel (dB) – The decibel is the unit used to quantify sound pressure levels. The human ear has an approximately logarithmic response to acoustic pressure over a very large dynamic range (typically 20 micro-Pascals to 100 Pascals). Therefore, a logarithmic scale is used to describe sound pressure levels and also sound intensity and power levels. The logarithms are taken to base 10. Hence an increase of 10 dB in sound pressure level is equivalent to an increase by a factor of 10 in the sound pressure level (measured in Pascals). Subjectively, this increase would correspond to a doubling of the perceived loudness of sound.

Equivalent continuous A-weighted sound pressure level, $L_{Aeq,T}$ – value of the A-weighted sound pressure level in decibels of continuous steady sound that, within a specified time interval, $T = t_2 - t_1$, has the same mean-squared sound pressure as a sound that varies with time, and is given by the following equation:

$$L_{Aeq,T} = 10 \lg_{10} \left\{ (1/T) \int_{t_1}^{t_2} [p_A(t)^2/p_0^2] dt \right\} \quad (1)$$

where:

p_0 is the reference sound pressure (20 μ Pa); and

$p_A(t)$ is the instantaneous A-weighted sound pressure (Pa) at time t

NOTE The equivalent continuous A-weighted sound pressure level is quoted to the nearest whole number of decibels.

Facade level – sound pressure level 1 m in front of the façade. Facade level measurements of L_{pA} are typically 1 dB to 3 dB higher than corresponding free-field measurements because of the reflection from the facade.

Free-field level – sound pressure level away from reflecting surfaces. Measurements made 1.2 m to 1.5 m above the ground and at least 3.5 m away from other reflecting surfaces are usually regarded as free-field. To minimize the effect of reflections the measuring position has to be at least 3.5 m to the side of the reflecting surface (i.e. not 3.5 m from the reflecting surface in the direction of the source).

Octave and Third Octave Bands – The human ear is sensitive to sound over a range of frequencies between approximately 20 Hz to 20 kHz and is generally more sensitive to medium and high frequencies than to low frequencies within the range. There are many methods of describing the frequency content of a noise. The most common methods split the frequency range into defined bands, in which the mid-frequency is used as the band descriptor and in the case of octave bands is double that of the band lower. For example, two adjacent octave bands are 250 Hz and 500 Hz. Third octave bands provide a fine resolution by dividing each octave band into three bands. For example, third octave bands would be 160 Hz, 250 Hz, 315 Hz for the same 250 Hz octave band.

Sound pressure level – Sound pressure level is stated on many of the charts. It is the amplitude of the acoustic pressure fluctuations in a sound wave, fundamentally measured in Pascals (Pa), typically from 20 micro-Pascals to 100 Pascals, but commonly simplified onto the decibel scale.

Sound reduction index, R – laboratory measure of the sound insulating properties of a material or building element in a stated frequency band.

Specific sound level, $L_s = L_{Aeq,Tr}$ – equivalent continuous A-weighted sound pressure level produced by the specific sound source at the assessment location over a given reference time interval, T_r .

Structure-borne noise – audible noise caused by the vibration of elements of a structure, the source of which is within a building or structure with common elements.

Rating level, $L_{Ar,Tr}$ – Specific sound level plus any adjustment for the characteristic features of the sound.

Reverberation Time, T – The reverberation time is defined as the time taken for a noise level in an enclosed space to decay by 60 dB from a steady level once the noise source has stopped. It is measured in seconds. Often a 60 dB decay cannot be measured so the reverberation time is measured over a lesser range and corrected back to the time for a 60 dB drop assuming a constant decay rate. Common parameters are T20 (time taken for a 20 dB decay multiplied by three) and T30 (time taken for a 30 dB decay multiplied by two).

Vibration Dose Value, VDV – measure of the total vibration experienced over a specified period of time.

Estimated Vibration Dose Value, $eVDV$ – estimation of the total vibration experienced over a specified period of time. This is usually based on the number of events and shortened measurement data.

Weighted sound reduction index, R_w – Single-number quantity which characterizes the airborne sound insulating properties of a material or building element over a range of frequencies. The weighted sound reduction index is used to characterize the insulation of a material or product that has been measured in a laboratory (see BS EN ISO 717-1).



ACOUSTIC
CONSULTANTS LTD

Head Office: 194 West Street, Bedminster, Bristol, BS3 3NB
T: 0117 986 2956

www.acoustic-ltd.co.uk

Registered Office: 194 West St, Bristol, BS3 3NB Registered No: 8544901