

CLIENT

Homes England

CONSULTANT

AECOM
MARLBOROUGH COURT
10 BRICKET ROAD
ST ALBANS, AL1 3JX, UK
Tel: +44 (0)1727 535 000
www.aecom.com

NOTES

1. To do all else from the drawing
2. All levels shown are in Metres above Ordnance Datum (AOD) unless stated otherwise.
3. This drawing is based on the following information by 48even survey consultant, drawing 1020_P - Paved & Capped August 2019, dated 16/08/2019, (C/L 1020_0225, All rights reserved. Licence number 0100031763).
4. It is the responsibility of the Contractor to confirm the accuracy of the setting phases, e.g. Eastern and Western Bridge Link Road prior to commencement.
5. Any design remains subject to Section 38 Technical Approval by Highway Authority.
6. This general agreement is not intended used for any other purpose. It is commonly known how the spatial relationship between the proposed works and the existing structures will change.
7. This drawing should be read in conjunction with all relevant documentation, drawings and site notes.
8. The works shall be carried out in accordance with the MCHW, DMRB and the local requirements of the County Council Highways Department.
9. Discrepancies information shown on the engineer's drawings or conflicting information between the drawings provided by others must be referred to the engineer before the works commence.
10. The contractor shall ensure that all dimensions and dimensions provided which take preference over any less accurate scaled dimensions, dimensions and details design shall be followed in the construction of the works shall be responsibility of the Contractor.
11. All site programming shall be agreed in advance with the overseeing organisation and the client.
12. The contractor shall maintain free and open access to the public highway and adjacent lands and properties at all time unless otherwise authorised by the Highway Authority.
13. Prior to the start of the works the Contractor shall agree a regime of formation testing with the Highway Authority. The Contractor shall test (for example CBR readings) shall be agreed with the adopting authority and the capping / sub grade shall be constructed accordingly.
14. For details of soft landscaping and proposals refer to the Landscape Architects drawings.
15. The Contractors shall ensure that there is continuity around street furniture and maintain the plan of laying throughout. The Contractor shall ensure that all works, curbs, kerbs, etc., are set to the left hand of any temporary surface are surrounded with bituminous material graded at least 1:22 to prevent water flowing off the left hand side of any ponding of surface water.
16. For kerb return on 90 degree angle, use 455mm Kerb.

FOR APPROVAL


SUITABILITY

S4 FOR STAGE APPROVAL

ISSUE/REVISION

P07	17/10/2025	FOOTWAY/CYCLEWAY AMENDMENTS
P06	30/05/2025	BLOCK PAVING AMENDMENTS
P05	12/02/2025	FOR PLANNING SUBMISSION
P04	20/12/2024	FOR PLANNING SUBMISSION
P03	16/01/2024	FOR APPROVAL
P02	18/12/2023	UPDATE FOLLOWING INTERNAL COORDINATION
P01	10/12/2023	FIRST ISSUE
I/R	DATE	DESCRIPTION

KEY PLAN

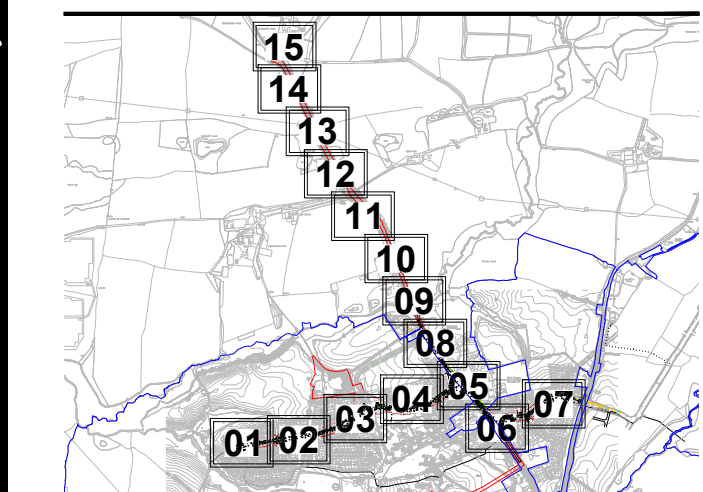

PROJECT NUMBER

SHEET TITLE

ADOPTABLE HIGHWAY
ROAD KERB AND PAVEMENT PLAN
SHEET 6

SHEET NUMBER

60610812-ACM-CS-ZZ-DR-HW-00-0706

