

GENERAL NOTES

- Buildings to be subject to services upgrade including electric, lighting, plumbing, drainage, heating etc.
- All farmyard building roofs to be carefully refurbished, insulated, and re-tiled in accordance with the proposed specifications. Existing clay and stone tiles, as well as other original roofing materials, are to be salvaged and re-used where viable.

- Replacement materials to match existing in type, texture, and appearance and be locally sourced where possible.
- All internal floors to be levelled and new insulated concrete slabs installed throughout, providing consistent finished floor levels (datums) as indicated in the proposed drawings.
 - All existing primary timber frames, structural elements, and original trusses to be protected during works,

- sensitively refurbished, and retained or reinstated in their original locations to preserve the appearance and character of the historic agricultural buildings.
- Redundant surface mounted services and boxing to be removed.
 - Replacement rainwater pipes and hopper heads to areas of proposed works. All rainwater goods to be replaced with Alumasc Heritage Cast Aluminium range.

- Modern central heating radiators replaced. Existing pipework to be reused where possible. Any new runs to utilise the void between floor and ceiling joists.
- Repairs, alterations of windows and doors to be carried out as required or to match existing.
- Structural steel and timbers to be inspected for damage and defect and replaced where necessary.
- Localised repair works to be carried

- out as required on further inspection to match existing materials and details as specified.
- Areas around demolition to be made good to match existing.
 - Modern joinery to be removed in areas of proposed works.
 - Chimney stacks, flues and draws to be inspected internally and externally for defects and damage and repaired accordingly.
 - All building materials to be locally

- sourced where possible.
- Refer to Structural information alongside RPA drawings.

Existing cowshed roof to be carefully refurbished and re-tiled to match original materiality. Where feasible, existing clay and Horsham stone tiles to be reclaimed and re-used. Roof to be insulated above and between the existing internal timber rafters (with ventilation zone added under tiling. Existing structural frame to remain visible within the interior.


Existing timber trusses and primary structural frame to be retained and refurbished where structurally viable. These elements will remain exposed within the cowshed interior.

Existing byre roof to be refurbished, re-tiled to match the original materiality, and internally insulated between rafters.


Existing byre roof to be refurbished, re-tiled to match the original materiality.

G18 and G19 to remain uninsulated as they are to function externally to the thermal envelope

New stepped access to cowshed to provide adequate headroom through existing doorway.

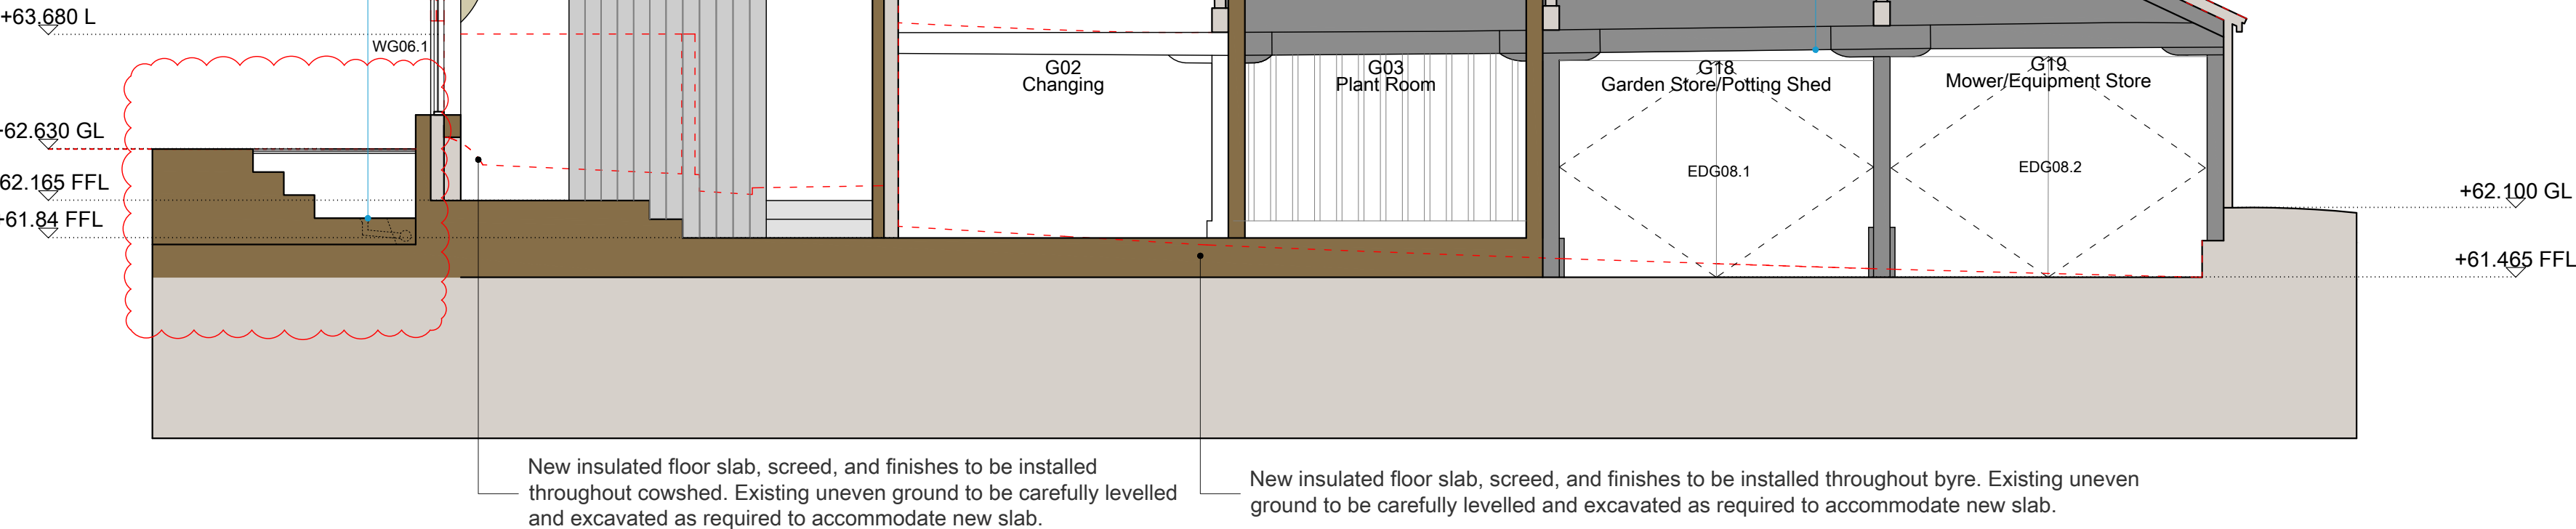

01 Cowshed and Byre Proposed Cross Section
1:50 @ A1; 1:100 @ A3



No dimensions are to be scaled from this drawing.

The contractor or manufacturer is responsible for checking all dimensions and querying any discrepancies.

This drawing is the property of Richard Parr Associates. Copyright is reserved by them and the drawing is issued on the condition that it is not copied, reproduced, retained or disclosed to any unauthorised person, either wholly or in part without written consent.

© Copyright Richard Parr Associates

Checked by
JM JM

Drawn by
FL FL

Date
18.06.25 18.12.25

Rev	Description
P01	Planning Issue
P02	Amendments for Planning P01

Job No

335

Project

Sunte House

Title

Farmyard Proposed Section

Drg No

335-FA-DR-00-302

Scale

1:50 @ A1 ; 1:100 @ A3

Date of First Issue


18.06.25

Rev

P02

Status

Planning

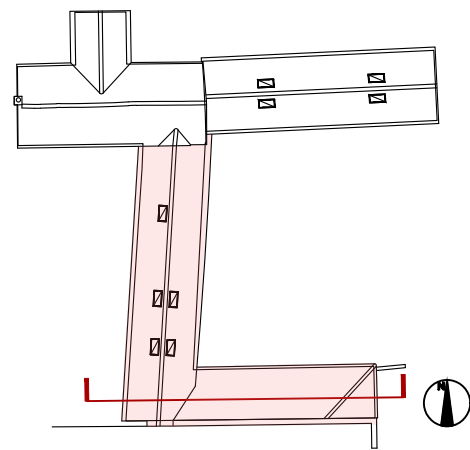

RICHARD PARR ASSOCIATES

studio@richardparr.com
+44 (0)1453 860200
richardparr.com
@richardparrassociates

+ COUNTRY
Easter Park
Nympsfield, Stonehouse
Gloucestershire GL10 3UL

TOWN
The People's Hall
Studio 5, 2 Olaf Street
London W11 4BE



Revision Bubble

• Variations to DM/25/1708-1709

• Omissions to DM/25/1708-1709

BL Beam Level
CL Ceiling Level
FL Floor Level
DP Down Pipe
HWC Hot Water Cylinder
SVP Soil Vent Pipe
RWP Rain Water Pipe
RWO Rain Water Outlet

Proposed Walls
Existing Walls
Demolition

