



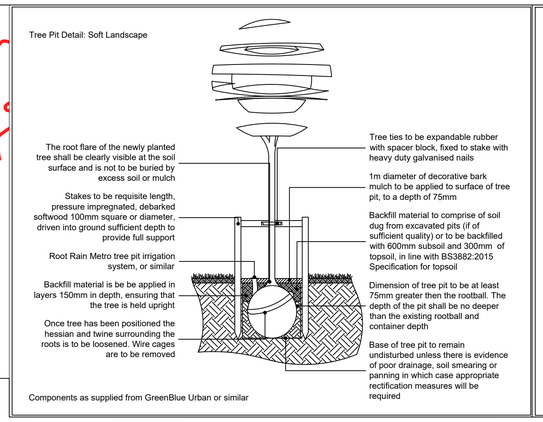

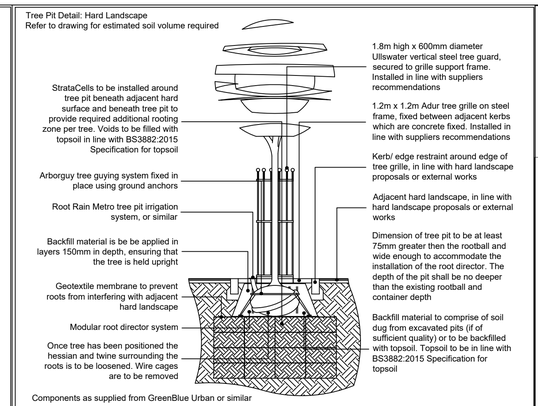

1No Camellia japonica
1No Prunus 'Pandora'
2No Bergenia cordifolia 'Purpurea'
3No Sarcococca humilis
2No Euonymus fortunei 'Silver Queen'
146No Photinia fraseri 'Red Robin'
1No Amelanchier arborea 'Robin Hill'
4No Viburnum davidii
3No Philadelphus 'Belle Etoile'
7No Skimmia japonica 'Fragrans'
5No Viburnum tinus 'Eve Price'
5No Philadelphus 'Belle Etoile'
4No Viburnum davidii
6No Euonymus fortunei 'Emerald Gaiety'
5No Skimmia japonica 'Fragrans'
40No Photinia fraseri 'Red Robin'
5No Sarcococca humilis
4No Rosa Princess Alice
6No Cistus corbariensis
7No Hypericum olympicum
7No Berberis darwinii
7No Abelia grandiflora 'Kaleidoscope'
1No Carpinus betulus 'Frans Fontaine'
64No Photinia fraseri 'Red Robin'
5No Euonymus fortunei 'Silver Queen'
34No Photinia fraseri 'Red Robin'
14No Cornus alba 'Elegantissima'
30No Photinia fraseri 'Red Robin'
6No Viburnum davidii
6No Euonymus fortunei 'Emerald Gaiety'
3No Euonymus fortunei 'Silver Queen'
5No Skimmia japonica 'Fragrans'
1No Amelanchier arborea 'Robin Hill'
65No Carpinus betulus
5No Sarcococca humilis
4No Viburnum davidii
35No Photinia fraseri 'Red Robin'
5No Skimmia japonica 'Fragrans'
7No Viburnum tinus 'Eve Price'
5No Euonymus fortunei 'Emerald Gaiety'
7No Euonymus fortunei 'Silver Queen'
7No Pittosporum tenuifolium 'Golf Ball'
7No Salvia greggii 'Peach'
4No Hypericum olympicum
6No Abelia grandiflora 'Kaleidoscope'
59No Photinia fraseri 'Red Robin'
6No Pittosporum tenuifolium 'Golf Ball'
71No Carpinus betulus
30No Photinia fraseri 'Red Robin'
5No Sarcococca humilis
6No Viburnum davidii
9No Viburnum tinus 'Eve Price'
7No Philadelphus 'Belle Etoile'
5No Euonymus fortunei 'Emerald Gaiety'
6No Skimmia japonica 'Fragrans'
30No Photinia fraseri 'Red Robin'
2No Amelanchier arborea 'Robin Hill'
76No Photinia fraseri 'Red Robin'
4No Lavandula angustifolia
6No Pittosporum tenuifolium 'Golf Ball'
4No Lavandula angustifolia
76No Photinia fraseri 'Red Robin'
2No Amelanchier arborea 'Robin Hill'
71No Carpinus betulus
30No Photinia fraseri 'Red Robin'
5No Viburnum davidii
6No Euonymus fortunei 'Emerald Gaiety'
9No Viburnum tinus 'Eve Price'
7No Philadelphus 'Belle Etoile'
5No Skimmia japonica 'Fragrans'
6No Sarcococca humilis
30No Photinia fraseri 'Red Robin'
1No Pyrus calleryana 'Chanticleer'
49No Photinia fraseri 'Red Robin'
4No Berberis thunbergii
4No Hebe franciscana 'Blue Gem'
4No Pittosporum tenuifolium 'Tom Thumb'
3No Lavandula angustifolia
3No Hebe franciscana 'Blue Gem'
6No Choisya ternata
1No Amelanchier arborea 'Robin Hill'
213No Prunus lusitanica
4No Berberis thunbergii
3No Hebe franciscana 'Blue Gem'
5No Pittosporum tenuifolium 'Tom Thumb'
4No Hypericum olympicum
3No Hebe franciscana 'Blue Gem'
6No Choisya ternata
2No Betula pendula 'Obelisk'
4No Berberis thunbergii
3No Hebe franciscana 'Blue Gem'
5No Pittosporum tenuifolium 'Tom Thumb'

055
054
053
058
059
060
061
062
063
073
074
075
076
077
078

Refer to HILL25025 20 for Open Space

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification. Any conflicting information to be brought to the attention of ACD Environmental before works commence on site.

NOTES:
DO NOT SCALE FROM DRAWING, ALWAYS SCALE FROM NOTED DIMENSIONS.

Drawing status : FOR INFORMATION

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within hard landscape. See detail on sheet 2.
- Proposed tree planting within soft landscape. See detail on sheet 2
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties. Irrigation tubing to root system as required
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed hedge planting to be planted in a double staggered row 400mm apart and at 300mm centres in each row. To be maintained at 1m height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed meadow mix, to be seeded with EM4 meadow mixture for clay soils supplied by Emorsgate Seed and sown at 4 grams per msq, or equivalent
- Proposed Flowering Lawn, to be seeded with EL1 Flowering lawn mixture as supplied by Emorsgate Seed and sown at 4 grams per msq, or equivalent
- Proposed wet tolerant meadow mixture, to be seeded with EM8 seed mix as supplied by Emorsgate Seeds and sown at 4 grams per msq, or equivalent
- Proposed grass area, to be seeded with A24 Wear and Tear grass seed mix as supplied by Germinal Seeds and sown at 50 grams per msq, or similar and approved
- Raised beds. Refer to hard landscape for details
- Play mounds
- Log steps from Playdale or similar
- Proposed public art
- Proposed storage tank. Refer to engineers details
- 18m³ Approximate soil volume required for tree in hard landscape. To be conformed by supplier of root cells which suit conditions.
- Bird Box - Swift bricks/boxes (20-30 to be installed in clusters of 3-5 units. Elevations of new build properties at minimum 5m height, away from direct sun. Integrated to building is preferred over mounted boxes.
- Dormouse nest boxes/tubes to be installed along Hedgerow H1. (8-15 features across the woodland, 20m spacing).
- Cut lines
- Planting Schedule on Sheet 00010
- Refer to hard landscape drawing HILL25205 12 for street furniture details.

Rev	Date	Details	Drawn

ACD ENVIRONMENTAL
Arboriculture
Archaeology
Ecology
Landscape Architecture
Phone: 01666 825646
Email: mail@acdenv.co.uk
Web: www.acdenvironmental.co.uk

project: Northern Arc, Burgess Hill Phase 1C, Eastern Neighbourhood Centre
client: Hill Partnerships Ltd
drawing: Soft Landscape Proposals
purpose: planning
date: May 2026
scale: 1:200@A1
drawing no: HILL25205 11
Sheet 00002
drawn: LS checked: DKM

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2011. Copyright of this plan remains with ACD until all fees have been paid in full.