


DOOR & WINDOW SCHEDULE

structural openings)

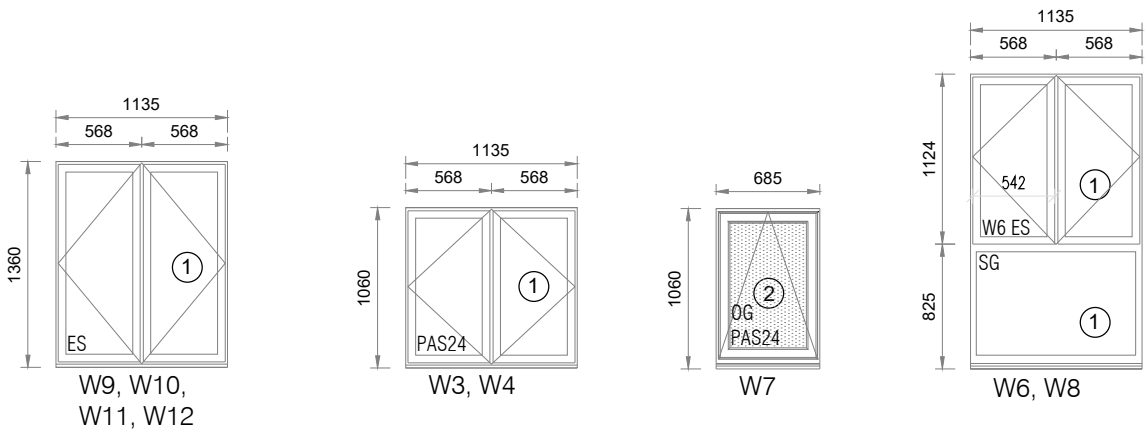

Key to glazing and materials:

- ① Clear glazing.
- ② Obscure glazing.
- ③ Safety glazing - refer to notes.
- ④ Look-a-like glazed panel, externally beaded for maintenance.
- ⑤ Composite door
- ⑥ Partially glazed UPVC.


NOTE:
Refer also to block elevations and site plan to see which windows and plots require special acoustic levels.

BACKGROUND VENTILATION

Approved Document F1, System 1, Background Ventilation, table 5.2a, total equivalent ventilator area (mm²) requirements:


Window manufacturer to ensure windows to all habitable rooms have min. 5000mm² and all wet rooms have min. 2500mm² equivalent areas (trickle ventilators) sized as necessary to achieve the whole dwelling total below.

NOTE:
Refer to block elevations for window and door handings.
(Dimensions are to Structural openings and are to be checked on site prior to window fabrication.)

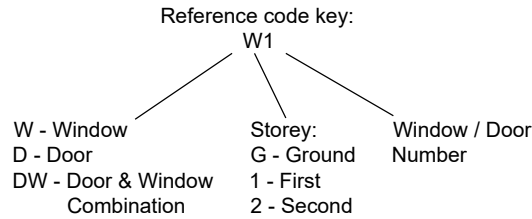


INTERNAL DOOR TYPES

(Dimensions are to structural openings)

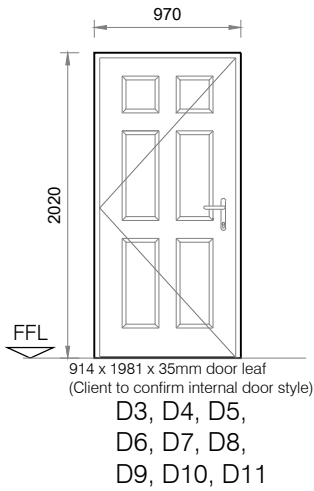

EXTERNAL DOOR TYPES

(Dimensions are to structural openings)

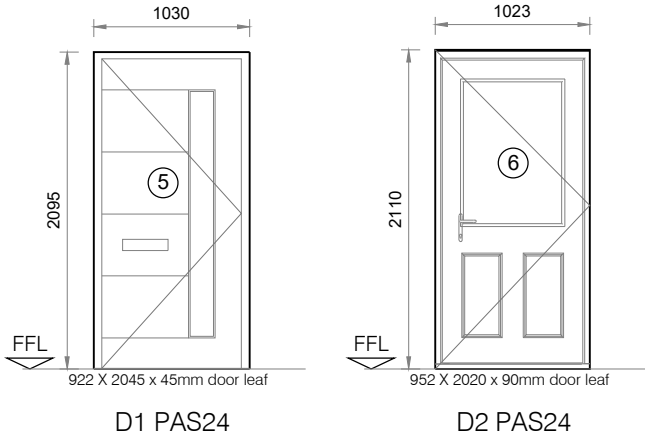

- Notes
- Copyright in this drawing remains the property of BM3 Architecture Limited.
 - Do not scale this drawing. Work to figured dimensions only.
 - Contractors and consultants are to advise BM3 Architecture Limited of any discrepancies.

Revision	Date	By	Chkd
/	/	HH	CF
First Issue	28.03.2022	RH	CF
P1			
Drawing Number updated			

PRELIMINARY

Client

ilke
HOMES

Project

BURGESS HILL
FAIRBRIDGE WAY

CiSfb Element

Drawing

PLOT 173 AS - DETACHED
4B6P M4(3)
DOOR & WINDOW SCHEDULE

Drawn by

SN

Checked

CF

Scale

1:50@A3

Dated

05.03.2022

Job No.

71588

Revision

P1

Drawing No.

4B6P-BM3-D-FD-DR-AR-0020

Birmingham Office

28 Pickford Street, Digbeth, Birmingham, B5 5QH

T. 0121 633 0000 F. 0121 633 0300 E. design@bm3.co.uk

BM3