



GROUP	SPECIES / PRODUCT NAME	DENSITY / RATE	SPECIFICATION
Proposed - Native Wildflower Grassland Areas	EH1 - Hedgerow Mixture	4g/m ²	
Proposed Native Wildflower Grassland Areas to be Seeded with Ennorgate EL1 - Flowering lawn mixture or equivalent	EM4 - Meadow Mixture for Clay Soils	4g/m ²	
	<i>Deschampsia cespitosa</i>	Specimen	Full pot, fully rooted, healthy

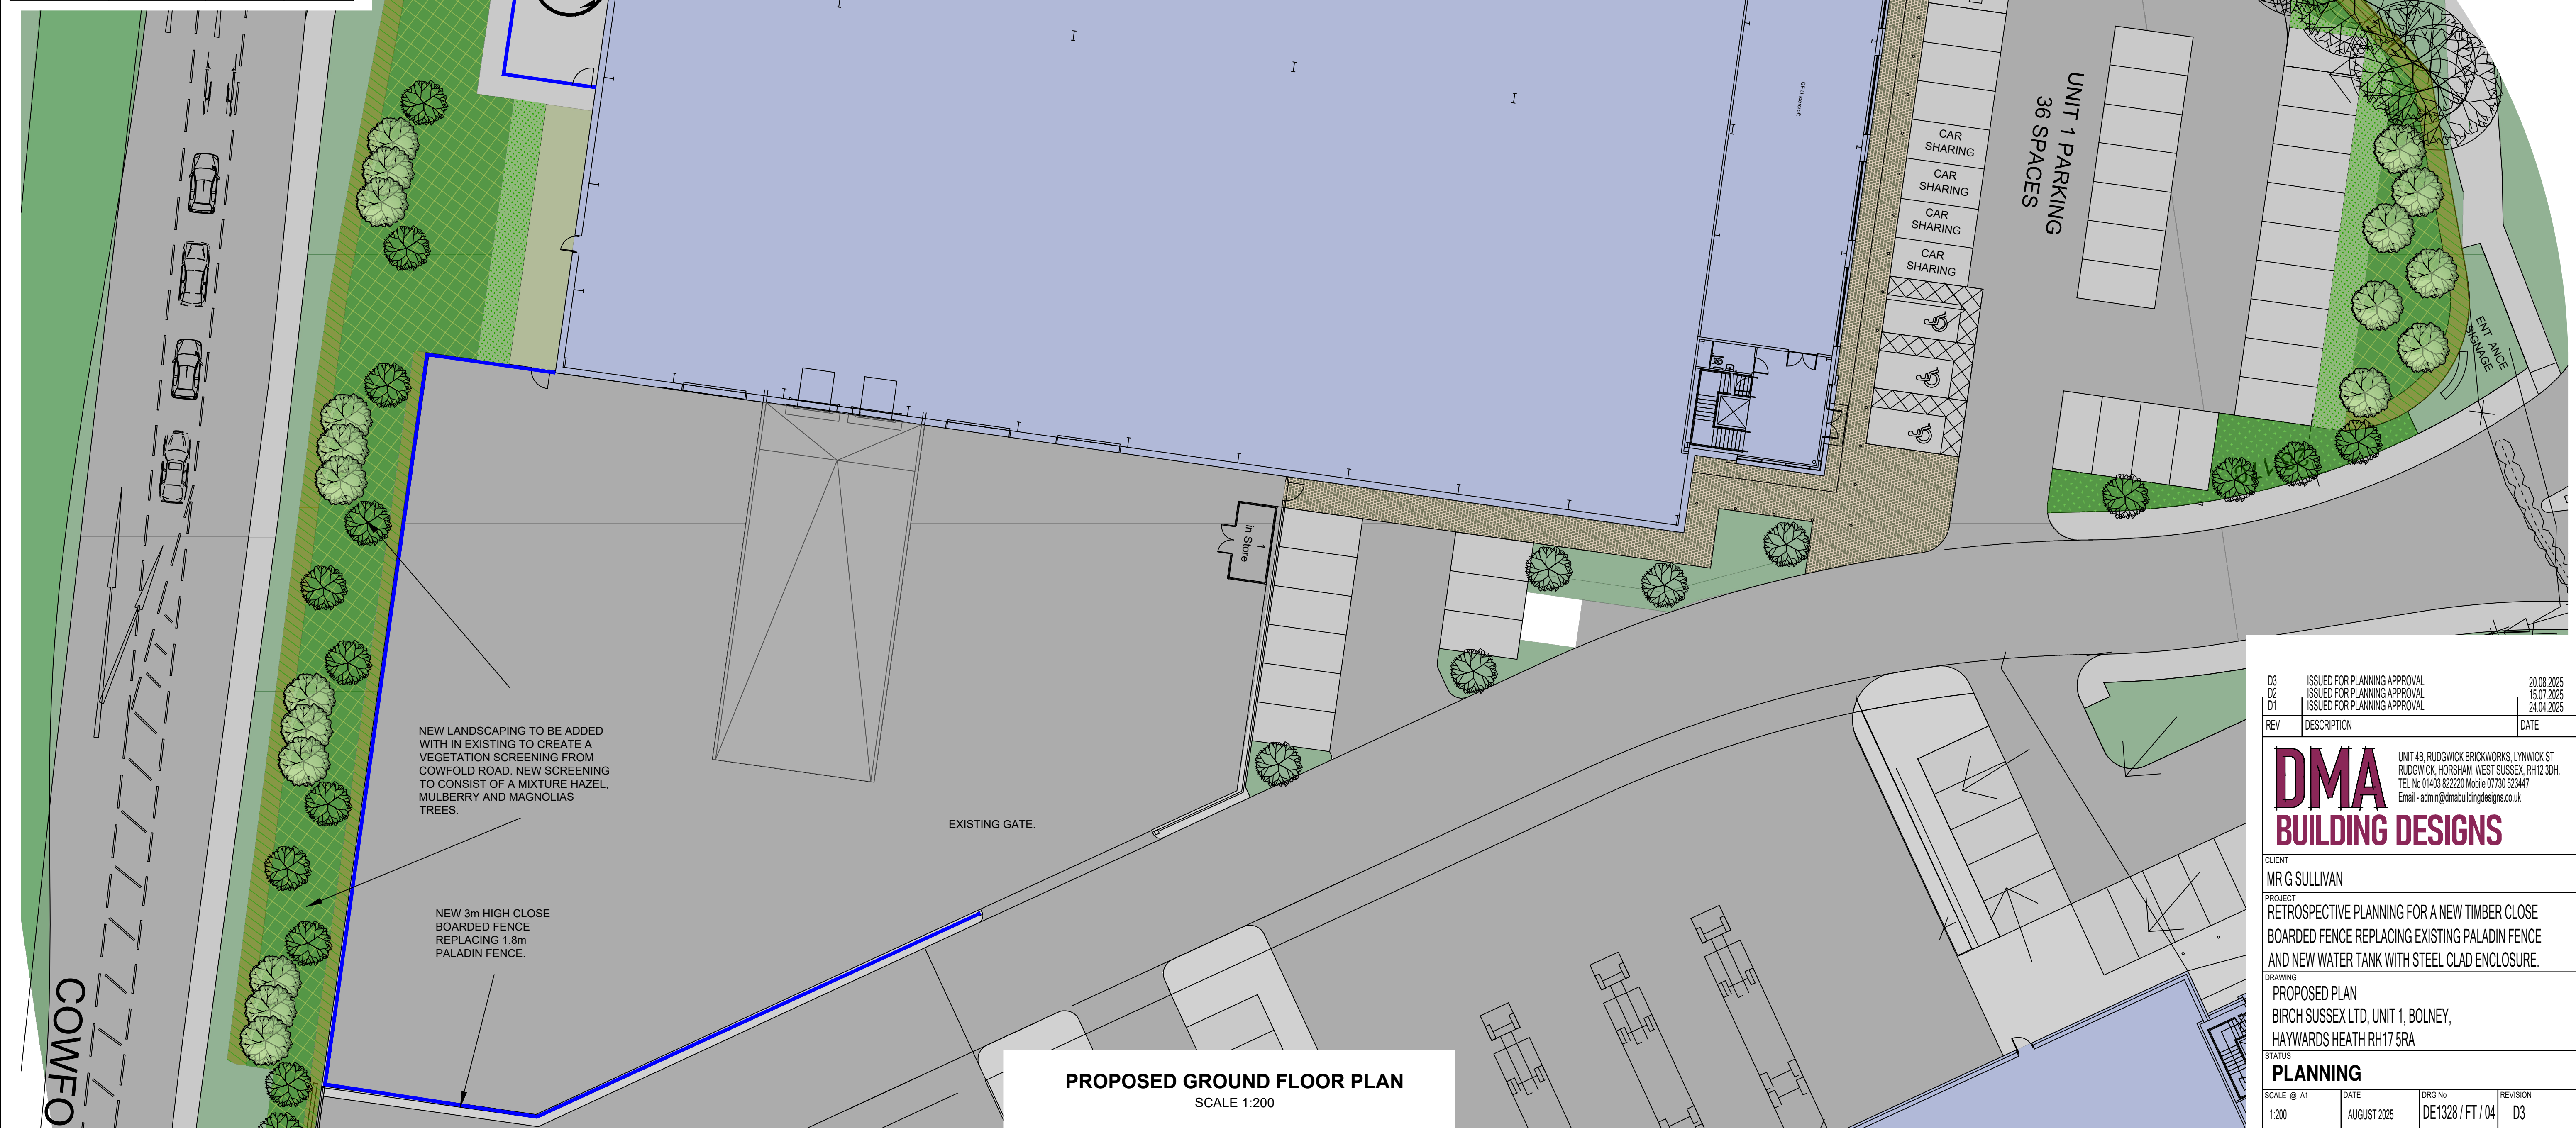

Proposed - Ornamental Planting
Proposed ornamental planting to flowering shrubs, grasses and herbaceous planting.

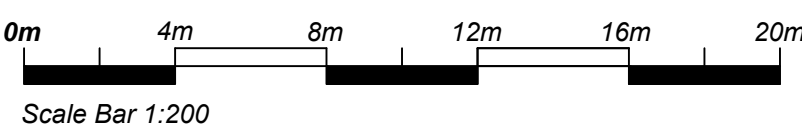

Proposed - Native Hedgerow Planting
Proposed native mixed species hedge to be 90-120cm height; planting to boundaries to be 3 no. staggered rows set 400mm apart; planted at 400mm centres and seeded with Emorsgate EH1 – Hedgerow Mixture seed mix or equivalent.

Proposed - Native Understory Shrub Planting
Proposed native mixed-species understory shrub planting to be a structural mix of 90-120cm height, evenly mixed and distributed in groups of 3-5 plants of the same species, and seeded with Emorsgate EH1 – Hedgerow Mixture seed mix or equivalent.

Proposed - Native Wildflower Grassland Areas
Proposed Native Wildflower Grassland Areas to be seeded with Emorsgate EL1 – Flowering lawn mixture or equivalent.

Proposed - Native Tree Planting
Proposed 2.5 - 3.5m height; Multistem.
Extra Heavy and Feathered.

D3	ISSUED FOR PLANNING APPROVAL	20.08.2025
D2	ISSUED FOR PLANNING APPROVAL	15.07.2025
D1	ISSUED FOR PLANNING APPROVAL	24.04.2025

DMA UNIT 4B, RUDGWICK BRICKWORKS, LYNNWICK ST
RUDGWICK, HORSHAM, WEST SUSSEX, RH12 3DH.
TEL No 01403 822220 Mobile 07730 523447
Email - admin@dmabuildingdesigns.co.uk

CLIENT
MR G SULLIVAN

PROJECT
RETROSPECTIVE PLANNING FOR A NEW TIMBER CLOSE
BOARDED FENCE REPLACING EXISTING PALADIN FENCE
AND NEW WATER TANK WITH STEEL CLAD ENCLOSURE.

PROPOSED PLAN
BIRCH SUSSEX LTD, UNIT 1, BOLNEY,
HAYWARDS HEATH RH17 5RA

STATUS			
PLANNING			
SCALE @ A1	DATE	DRG No	REVISION
1:200	AUGUST 2025	DE1328 / FT / 04	D3