





Provide Mineral Felt Roof
Finish

Provide Treated Softwood
Cladding Facades


Provide Concrete Floor/Plinth

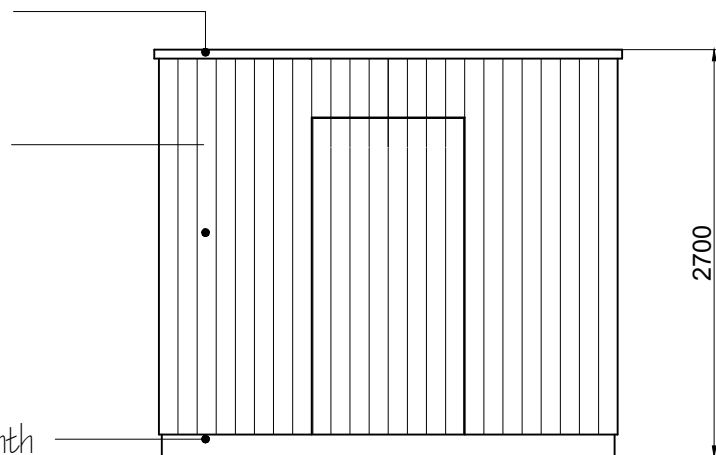


PROPOSED EAST ELEVATION

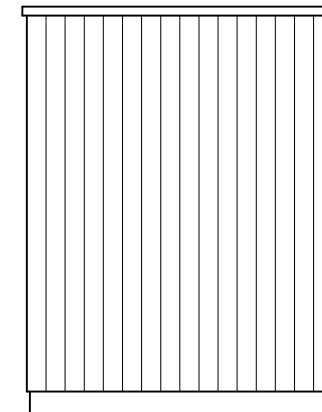


PROPOSED SOUTH ELEVATION

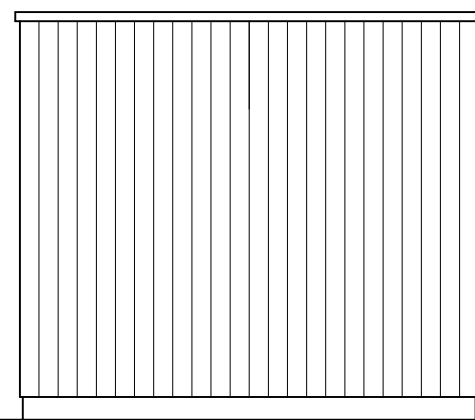

PROPOSED WEST ELEVATION

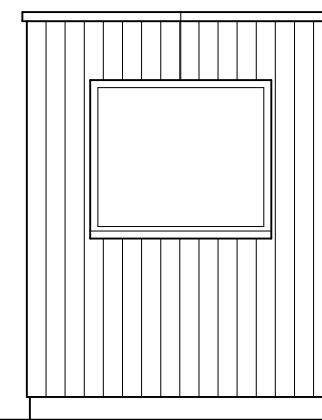

PROPOSED NORTH ELEVATION

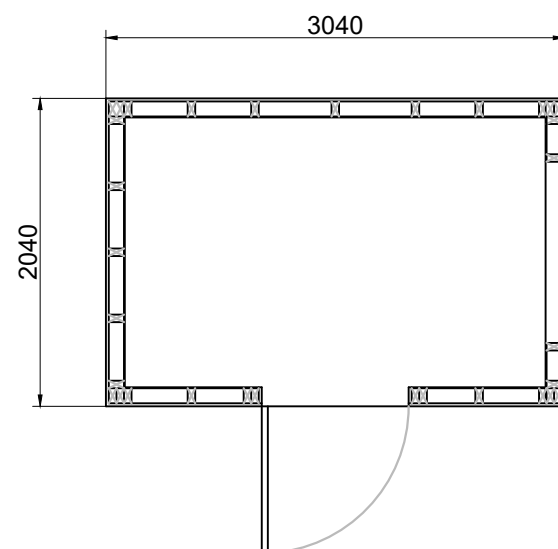

PROPOSED FLOOR LAYOUT

- FOUNDATION/FLOOR:

PROVIDE 100mm FLOAT FINISHED CONCRETE SLAB WITH 300mm WIDE x 300mm DEEP DOWNSTAND PERIMETER EDGE & 100mm MOT SUB-BASE.

- EXTERNAL WALLS:

PROVIDE 18mm TREATED SOFTWOOD CLADDING ON 50x100mm TREATED SOFTWOOD STUD WORK FRAME AT 400mm Cts, WITH 12mm WBP EXTERNAL GRADE PLYWOOD INTERNAL FINISH.

- ROOF CONSTRUCTION:

PROVIDE 50x100mm C16 ROOF JOISTS WITH 18mm EXTERNAL GRADE WBP PLYWOOD DECKING FINISHED WITH MINERAL FELT OR EDPM APPLIED FINISH.

Project

8A Highfields
Brighton Road
Warninglid
West Sussex
RH17 5SY

Drawing

Proposed Secure Cycle/ Storage Building
Floor Layout & Elevations



Architects & Planning Consultants

Clock Tower House, Lewes Road
Lindfield, West Sussex. RH16 2LH
Telephone 01444 - 484711

Client

Ms Mears

Drawing no.	date	scale	drawn
2125. PO2	July 26	1:50@A3	GRM
revisions			

©THE CONTRACTOR SHOULD CHECK ALL DIMENSIONS ON SITE.
NO DIMENSIONS TO BE SCALED FROM DRAWINGS.
IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE COMPLIANCE
WITH BUILDING REGULATIONS.