



GLIDELINE

GW70 CASEMENT WINDOW





SPECIFICATION



SIGHTLINES

FRAME 70 MM, SASH 70 MM

GLAZING

MAX. 44 MM, MIN. 23 MM

MAXIMUM SASH DIMENSIONS

SLIM SASH (SIDE HUNG): WIDTH (L) 950 MM, HEIGHT (H) 1300 MM
 SLIM SASH (TOP HUNG): WIDTH (L) 1200 MM, HEIGHT (H) 1300 MM
 HEAVY DUTY SASH (SIDE HUNG): WIDTH (L) 750 MM, HEIGHT (H) 1750 MM
 HEAVY DUTY SASH (TOP HUNG): WIDTH (L) 1800 MM, HEIGHT (H) 1800 MM


MAXIMUM SASH WEIGHT

SIDE HUNG SLIM SASH: 35 KG
 TOP HUNG SLIM SASH: 50 KG
 SIDE HUNG HEAVY DUTY SASH: 42 KG
 TOP HUNG HEAVY DUTY SASH: 100 KG

COLOUR


POWDER COATING RAL FINISH
 STANDARD 7016M, 9005M, 9016G
 AVAILABLE IN 150+ RAL FINISHES
 TEXTURED FINISH AVAILABLE
 SPLIT COLOR FOR INTERIOR/EXTERIOR
 WOOD EFFECT POWDER COATING
 ANODIZED ALUMINIUM

BFRC Rating kWh/(m².yr)




Double glazing

BFRC Rating kWh/(m².yr)



Triple glazing

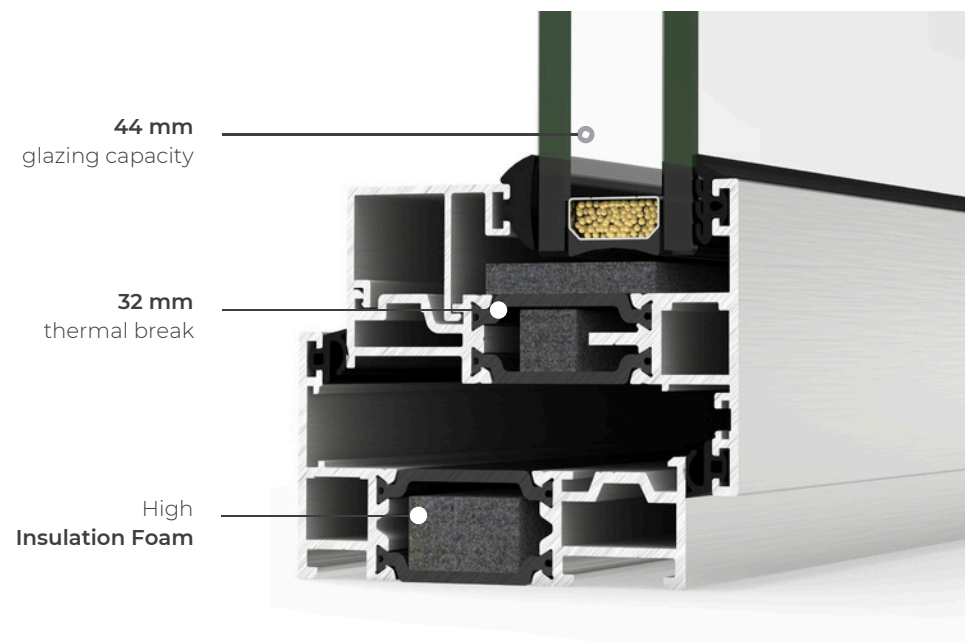

FEATURES

U value		Double glazing * Uw from 1.4 (W/m²K)	Triple glazing * Uw ≥ 1.0 (W/m²K)
Acoustic insulation		Rw up to 45 dB	
Air permeability		Class 4	
Water tightness		Class E1200	
Wind resistance		Class CE 2400	
Security test		PAS24 ✓	Passed


* Double glazing Ug=1.0 / Triple glazing Ug=0.5

Security test: Reference test 1.438 x 1.33 m / 1 sash


CONFIGURATIONS



FLUSH VERSION

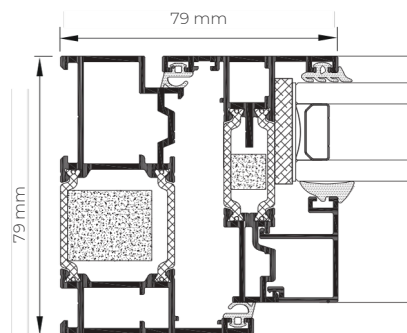

STANDARD VERSION

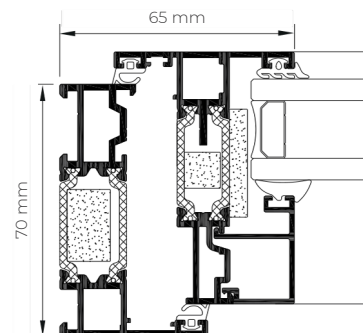


FLUSH
VERSION




STANDARD
VERSION


DRAINAGE SUBCILLS

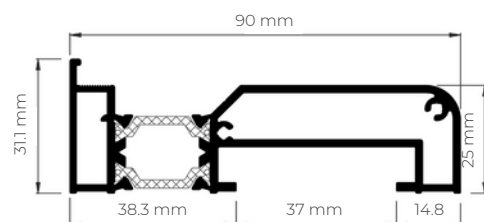


90 MM

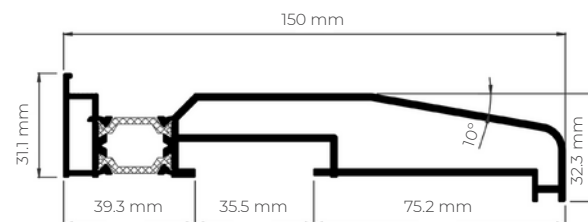

150 MM




180 MM




230 MM

HEAD EXTENSION

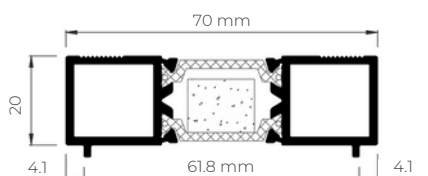

HEAD EXTENSION 20 MM

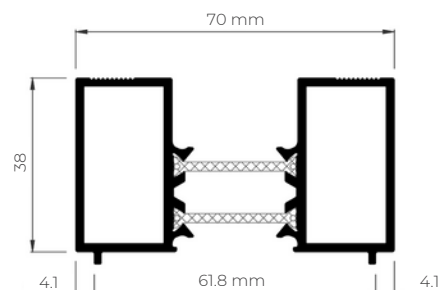

HEAD EXTENSION 38 MM

OPENING POSSIBILITIES



Outward Opening
Side hung
Top hung

POSSIBILITIES



SECURITY
HARDWARE



CONCEALED
HINGES

HARDWARE



Regardless of whether you're looking to maintain modern aesthetics or a more traditional style, our choice of colours will suit you. We have a range of handle options to choose from to achieve the perfect look.


The aluminium casement windows that we supply at Glideline have been carefully designed to be thermally efficient. With a U-value of $1.4 \text{ W/m}^2\text{K}$, your or your customer's home will be comfortable all year round.





GLIDELINE GO

KEEP UP TO DATE WITH YOUR
GLAZING PROJECTS WITH
GLIDELINE GO

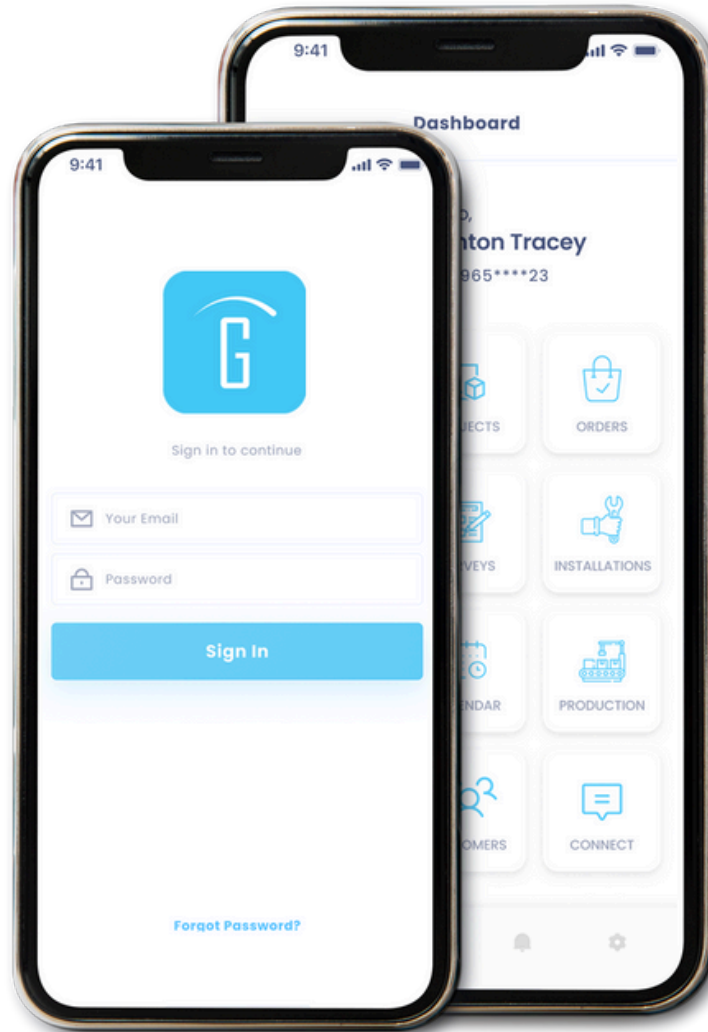

Introducing GlidelineGO – the ultimate system designed to streamline your glazing order management process. With GlidelineGO, customers and trade partners can effortlessly create, track, and manage orders, while enjoying the convenience of approving drawings and making payments directly within the app.

Efficiency and ease-of-use are at the heart of GlidelineGO. Whether you're an architect, contractor, or glazing professional, this powerful app empowers you to take control of your glazing projects, ensuring a seamless experience from start to finish.



