

GENERAL NOTES

1. Buildings to be subject to services upgrade including electric, lighting, plumbing, drainage, heating etc.
2. All farmyard building roofs to be carefully refurbished, insulated, and re-tiled in accordance with the proposed specifications. Existing clay and stone tiles, as well as other original roofing materials, are to be salvaged and re-used where viable.

3. Replacement materials to match existing in type, texture, and appearance and be locally sourced where possible.
4. All internal floors to be levelled and new insulated concrete slabs installed throughout, providing consistent finished floor levels (datums) as indicated in the proposed drawings.
5. All existing primary timber frames, structural elements, and original trusses to be protected during works,

6. sensitively refurbished, and retained or reinstated in their original locations to preserve the appearance and character of the historic agricultural buildings.
7. Redundant surface mounted services and boxing to be removed.
8. Replacement rainwater pipes and hopper heads to areas of proposed works. All rainwater goods to be replaced with Alumasc Heritage Cast Aluminium range.


9. Modern central heating radiators replaced. Existing pipework to be reused where possible. Any new runs to utilise the void between floor and ceiling joists.
10. Repairs, alterations of windows and doors to be carried out as required or to match existing.
11. Structural steel and timbers to be inspected for damage and defect and replaced where necessary.
12. Localised repair works to be carried

13. out as required on further inspection to match existing materials and details as specified.
14. Areas around demolition to be made good to match existing.
15. Modern joinery to be removed in areas of proposed works.
16. Chimney stacks, flues and draws to be inspected internally and externally for defects and damage and repaired accordingly.
17. All building materials to be locally

18. sourced where possible.
19. Refer to Structural information alongside RPA drawings.



01 Byre and Stables Proposed Cross Section
1:50 @ A1; 1:100 @ A3

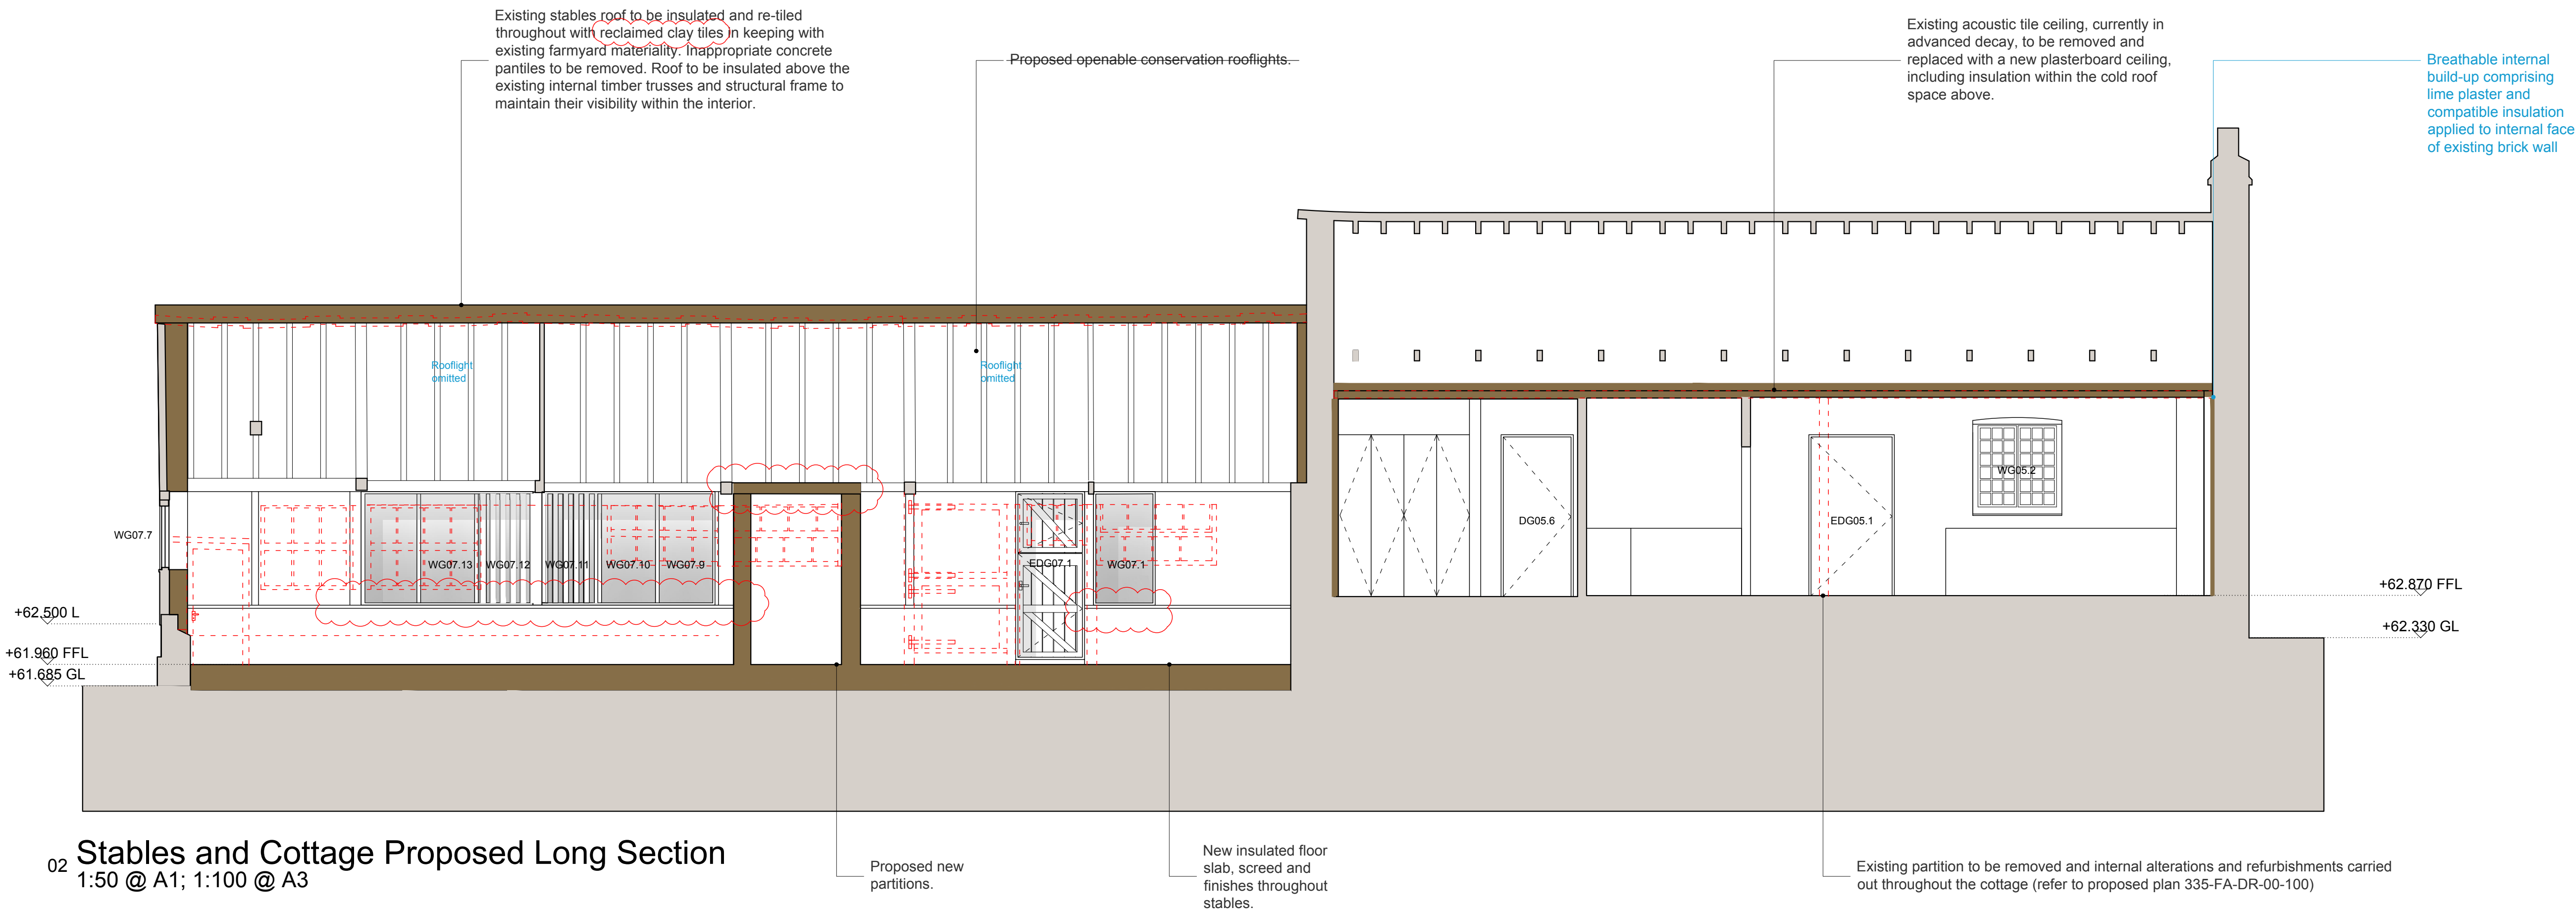

02 Stables and Cottage Proposed Long Section
1:50 @ A1; 1:100 @ A3



Revision Bubble

Variations to DM/25/1708, 1709

Omissions to DM/25/1708, 1709

BL Beam Level
CL Ceiling Level
FL Floor Level
DP Down Pipe
HWC Hot Water Cylinder
SVP Soil Vent Pipe
RWP Rain Water Pipe
RWO Rain Water Outlet

Proposed Walls

Existing Walls

Demolition



No dimensions are to be scaled from this drawing.

The contractor or manufacturer is responsible for checking all dimensions and querying any discrepancies.

This drawing is the property of Richard Parr Associates. Copyright is reserved by them and the drawing is issued on the condition that it is not copied, reproduced, retained or disclosed to any unauthorised person, either wholly or in part without written consent.

© Copyright Richard Parr Associates

Checked by
JM
JM
JM

Drawn by
FL
FL
MP

Date
18.06.25
18.12.25
13.01.26

Description
Planning Issue
Amendments to Planning P01
Amendments to Planning P02

Rev
P01
P02
P03

Job No

335

Project

Sunte House

Title

Farmyard Proposed Sections

Drg No

335-DR-00-301

Scale

1:50 @ A1 ; 1:100 @ A3

Date of First Issue


18.06.25

Rev

P03

Status

Planning

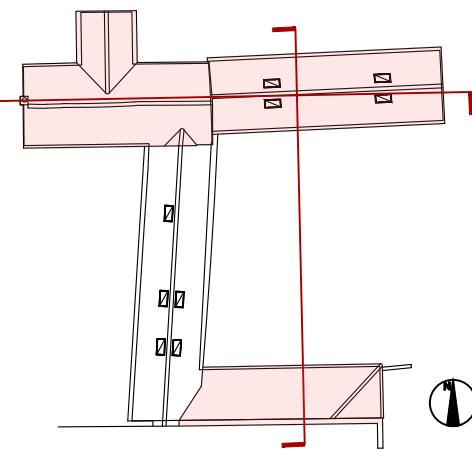

RICHARD PARR ASSOCIATES

studio@richardparr.com
+44 (0)1453 860200
richardparr.com
@richardparrassociates

+ COUNTRY
Easter Park
Nympsfield, Stonehouse
Gloucestershire GL10 3UL

TOWN
The People's Hall
Studio 5, 2 Olaf Street
London W11 4BE