
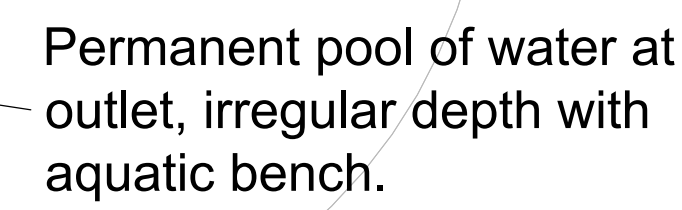



GENERAL NOTES
---------------

\_\_\_\_\_




- Opening in back all cast to suit outside diameter of the pipework
- Invert level of pipe can be set to your specification
- H3C suitable for pipework up to 300mm ID twin wall or clay / 225mm ID concrete

- Grating manufactured from 40 x 10 flat at 75mm centres with 50 x 50 angle mounting points
- Unit fully welded then hot dip galvanised

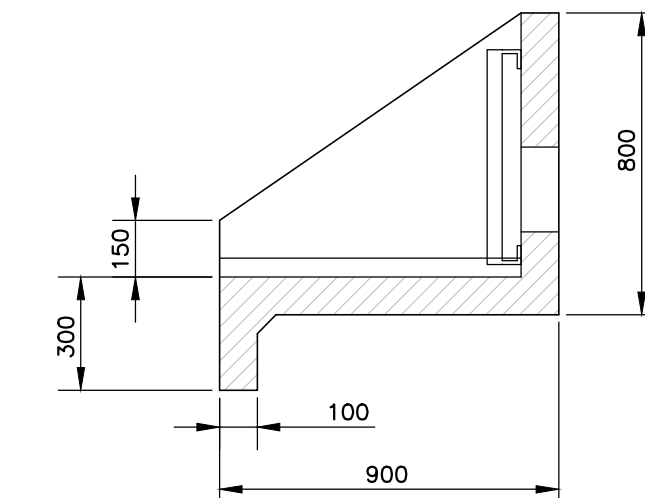

Units should be bedded on minimum 100mm of semi-dry concrete.  
Sit the headwall level or with a slight fall 1:50 from pipe to spill mouth.  
For full detailed installation instructions contact ALTHON Ltd, 01603 488700

Weight approximately  
All dimensions in mm

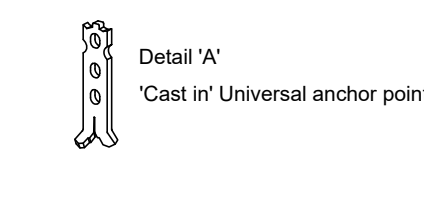


Althon H3C Headwall Detail  
1:20

REV	DATE	AMENDMENT	BY	CHKD
-----	------	-----------	----	------

PROJECT
---------

\_\_\_\_\_



\_\_\_\_\_

REG NO