

MAINTENANCE NOTES
1. THE OWNER OF THE FLAT IS COLLECTIVELY RESPONSIBLE FOR THE MAINTENANCE OF THE BUILDING'S DRAINAGE ARRANGEMENT .
THIS IS TO BE ENTERED IN TO ALL LEGAL DOCUMENTS

MAINTENANCE SCHEDULE - AS TAKEN FROM SUDS MANUAL, TABLE 31.1 FOR DOMESTIC SOAKAWAYS
(THIS INFORMATION IS TO BE WRITTEN IN TO THE O&M MANUAL)

MAINTENANCE SCHEDULE	REQUIRED ACTION	TYPICAL FREQUENCY	PERSON RESPONSIBLE FOR UNDERTAKING OR COMMISSIONING SUITABLE PROFESSIONAL
REGULAR MAINTENANCE	INSPECT FOR SEDIMENT AND DEBRIS IN PRE-TREATMENT COMPONENTS AND DOOR OF INSPECTION TUBE OR CHAMBER AND INSIDE OF CONCRETE MANHOLE RINGS	MONTHLY FOR 3 MONTHS, THEN ANNUALLY	CLIENT / END USER / BUILDING OWNER
	CLEANING OF GUTTERS AND ANY FILTERS ON DOWNPIPES	ANNUALLY, OR AS REQUIRED BASED ON INSPECTIONS	CLIENT / END USER / BUILDING OWNER
	TRIMMING ANY ROOTS THAT MAY BE CAUSING BLOCKAGES	ANNUALLY, OR AS REQUIRED	CLIENT / END USER / BUILDING OWNER
OCCASIONAL MAINTENANCE	REMOVE SEDIMENT AND DEBRIS FROM PRE-TREATMENT COMPONENTS AND DOOR OF INSPECTION TUBE OR CHAMBER AND INSIDE OF CONCRETE MANHOLE RINGS	ANNUALLY, OR AS REQUIRED BASED ON INSPECTIONS	CLIENT / END USER / BUILDING OWNER
REMEDIAL ACTIONS	RECONSTRUCT SOAKAWAY AND/OR REPLACE OR CLEAN VOID FILL, IF PERFORMANCE DETERIORATES OR FAILURE OCCURS	AS REQUIRED	CLIENT / END USER / BUILDING OWNER
	REPLACEMENT OF CLOGGED GEOTEXTILE (WILL REQUIRE RECONSTRUCTION OF SOAKAWAY)	AS REQUIRED	CLIENT / END USER / BUILDING OWNER
MONITORING	INSPECT SILT TRAPS AND NOTE RATE OF SEDIMENT ACCUMULATION	MONTHLY IN THE FIRST YEAR AND THEN ANNUALLY	CLIENT / END USER / BUILDING OWNER
	CHECK SOAKAWAY TO ENSURE EMPTYING IS OCCURRING	ANNUALLY	CLIENT / END USER / BUILDING OWNER

MAINTENANCE SCHEDULE - AS TAKEN FROM SUDS MANUA C753, APPENDIX B, BOX-B2 FOR PERVIOUS PAVEMENTS

MAINTENANCE SCHEDULE	REQUIRED ACTION	TYPICAL FREQUENCY	PERSON RESPONSIBLE FOR UNDERTAKING OR COMMISSIONING SUITABLE PROFESSIONAL
REGULAR MAINTENANCE	CLEANING BRUSH REGULARLY AND REMOVE SWEEPINGS FROM ALL HARD SURFACE	MONTHLY	SITE OWNER (MAINTENANCE CONTRACT)
OCCASIONAL TANKS	BRUSH AND VACUUM PERMEABLE PAVING SURFACE ONCE A YEAR TO PREVENT SILT BLOCKAGE AND ENHANCE DESIGN LIFE	ANNUALLY	SITE OWNER (MAINTENANCE CONTRACT)
REMEDIAL WORK	MONITOR EFFECTIVENESS OF PERMEABLE PAVEMENT, AND WHEN WATER DOES NOT INFILTRATE IMMEDIATELY ADVISE THE CLIENT OF POSSIBLE NEED FOR REINSTATEMENT OF TOP LAYERS OR SPECIALIST CLEANING. RECENT EXPERIENCE SUGGESTS THAT WET WASHING AND SUCTION CLEANING WILL SUBSTANTIALLY REINSTATE PAVEMENT TO 90% EFFICIENCY	AS REQUIRED	SITE OWNER (MAINTENANCE CONTRACT)

MAINTENANCE SCHEDULE - AS TAKEN FROM SUDS MANUA C753, APPENDIX B, BOX-B2 FOR INLETS, OUTLETS & INSPECTION CHAMBERS

MAINTENANCE SCHEDULE	REQUIRED ACTION	TYPICAL FREQUENCY	PERSON RESPONSIBLE FOR UNDERTAKING OR COMMISSIONING SUITABLE PROFESSIONAL
REGULAR MAINTENANCE	INLETS, OUTLETS AND SURFACE CONTROL STRUCTURES INSPECT SURFACE STRUCTURES, REMOVING OBSTRUCTIONS AND SILT AS NECESSARY. CHECK THERE IS NO PHYSICAL DAMAGE.	MONTHLY (OR AS REQUIRED)	SITE OWNER (MAINTENANCE CONTRACT)
	STRIM VEGETATION 1m MIN. SURROUND TO STRUCTURES AND KEEP HARD APRONS FREE FROM SILT AND DEBRIS	MONTHLY	SITE OWNER (MAINTENANCE CONTRACT)
	INSPECTION CHAMBERS AND BELOW-GROUND CONTROL CHAMBERS REMOVE COVER AND INSPECT, ENSURING THAT WATER IS FOWING FREELY AND THAT THE EXIT ROUTE FOR WATER IS UNOBSTRUCTED. REMOVE DEBRIS AND SILT. UNDERTAKE INSPECTION AFTER LEAF FALL IN AUTUMN	ANNUALLY	SITE OWNER (MAINTENANCE CONTRACT)
OCCASIONAL TANKS	CHECK TOPSOIL LEVELS ARE 20mm ABOVE EDGES OF BASKETS AND CHAMBERS TO AVOID MOWER DAMAGE	ANNUALLY (OR AS REQUIRED)	SITE OWNER (MAINTENANCE CONTRACT)
REMEDIAL WORK	REPAIR PHYSICAL DAMAGE IF NECESSARY	AS REQUIRED	SITE OWNER (MAINTENANCE CONTRACT)

- NOTES:-
- THIS DRAWING IS NOT TO BE SCALED, WORK FROM GIVEN DIMENSIONS ONLY.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTS, SERVICE ENGINEERS AND SPECIALISTS DRAWINGS..
 - ANY DISCREPANCIES OR VARIATIONS ARE TO BE REPORTED IMMEDIATELY TO ENGINEER FOR CLARIFICATION BEFORE THE AFFECTED WORK COMMENCES.
 - ALL DIMENSIONS ARE TO BE CHECKED ON SITE. ANY DISCREPANCIES TO BE REPORTED TO ENGINEER IMMEDIATELY BEFORE THE AFFECTED WORK COMMENCES.
 - ALL PROPRIETARY PRODUCTS ARE TO BE USED IN ACCORDANCE WITH THE MANUFACTURERS DETAILS AND SPECIFICATIONS.
 - THE CONTRACTOR IS TO ENSURE THAT TEMPORARY LOADS PLACED ONTO THE NEW STRUCTURES SHALL BE LESS THAN THELOADS FOR WHICH IT HAS BEEN DESIGNED.
 - THE CONTRACTOR IS RESPONSIBLE FOR ALL TEMPORARY WORKS AND FOR THE STABILITY OF THE WORKS IN PROGRESS.
 - THESE DRAWINGS CONSTITUTE A FULL DESIGN FOR BUILDING CONTROL APPROVAL. THEY ARE NOT CONSTRUCTION STAGE DRAWINGS UNTIL BUILDING CONTROL HAVE APPROVED THE DESIGN(S).
 - FOR THE FULL COMPREHENSIVE GENERAL NOTES SEE GENERAL NOTES DRAWING 100.

WARNING IDENTIFICATION

 PARTICULAR ATTENTION TO BE PAID WHERE THE HAZARD SYMBOL IS PLACED ON A DRAWING. THIS SYMBOL HIGHLIGHTS A PARTICULAR CONCERN IN RELATION TO THE DESIGN, SITE WORKING OR WHERE THE CONTRACTORS ATTENTION IS REQUIRED.

MEASURES TO MITIGATE RISK SHOULD BE CONSIDERED AT ALL STAGES OF DESIGN DEVELOPMENT AND CONSTRUCTION.

COORDINATION HIGHLIGHT


 WHERE THE BLUE HIGHLIGHT SYMBOL IS PLACED ON A DRAWING PARTICULAR ATTENTION IS REQUIRED WITH REGARD TO COORDINATION.

STABILITY REQUIREMENT HIGHLIGHT

 WHERE THE GREEN HIGHLIGHT SYMBOL IS PLACED ON A DRAWING THIS REFERS TO THIS ELEMENT OF THE DESIGN BEING CRITICAL TO THE STABILITY STRATEGY

REV	DESCRIPTION	DATE	BY
P1	PLANNING DOC	02.07.2025	PW

FOR PLANNING DOC

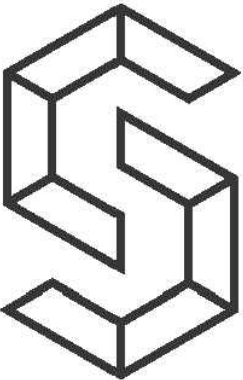

CREATIVE
STRUCTURES

t: 01273 359 990
e: info@csidestructures.co.uk
w: www.csidestructures.co.uk

Client
JOSH BAXTER

Project
NORTH HAVEN, FOX HILL,
HAYWARDS HEATH, RH16 4QY

Title
NEW DWELLING DRAINAGE
TYPICAL DETAILS - SHEET 2 of 2

Date 02.07.2025 Checked 02.07.2025

Drawing Sheet Size A1

Scale AS SHOWN Engineer PW

Status PLANNING DOC

Project Number	Drawing Number	Revision
25-028	53	P1