

GENERAL NOTES

1. Building to be subject to services upgrade including electric, lighting, plumbing, drainage, heating etc.
2. Redundant surface mounted services and boxing to be removed.
3. Replacement rainwater pipes and hopper heads to areas of proposed works. All rainwater goods to be replaced with Alumasc Heritage Cast Aluminium range.
4. Modern central heating radiators replaced. Existing pipework to be reused where possible. Any new runs to utilise the void between floor and ceiling joists.
5. Extg timber floorboards at second floor to be catalogued, dismantled and set aside to store for reinstatement in original location after installation of new services and additional insulation. All boards to be inspected and repaired accordingly. All damaged / modern floorboards to be replaced to match original floors.

6. Detailed survey to be undertaken to determine a window by window analysis for upgrade and / or replacement. Windows to be carefully inspected for defects and deterioration and repaired where necessary. Existing sashes to be retained wherever possible or, where replacement is required, replaced on a like-for-like basis to match the existing material, profile and glazing bar pattern. The extent of repair, thermal upgrading and any replacement will be confirmed following the detailed window-by-window survey.

7. Repairs, alterations of windows and doors to be carried out as required to match existing.
8. Structural steel and timbers to be inspected for damage and defect and replaced where necessary.
9. Localised repair works to be carried out as required on further inspection to match existing materials and details.
10. Areas around demolition to be made good to match existing.
11. Modern joinery to be removed in areas of proposed works.
12. Historic cornices and skirtings to be repaired and retained in original location. In case of damage/defect, cornices and skirtings to be replaced to match extg.
13. Chimney stacks, flues and draws to be inspected internally and externally for defects and damage and repaired accordingly. Chimney pieces, hearths, mantels, cast iron braziers and chimney breasts to be repaired and cleaned.
14. All building materials to be locally sourced where possible.
15. Refer to Structural information alongside RPA drawings.

Extg roof coverings to be recorded, carefully lifted and set aside to allow installation of new breathable insulation between rafters and ventilation zone above. Extg tiles to be reinstated in original location, overhauled and steam cleaned to remove all algae, moss, fungi and later paint coatings. Cleaning methods to be tested on a limited area before application. Damaged roofing to be replaced like for like where required including damaged tiles, flashings, dressings and valleys.

Chimney stacks to be inspected for structural stability and repaired accordingly

Existing Dairy Roof to be extended as per proposed plans to form enclosed courtyard: G20 Breakfast Room. Extension to feature a pitched roof matching the existing Dairy in clay tiles and detailing. The new structure will abut the chimney breast of the existing north-east wing.

Extg Dairy roof coverings to be recorded, carefully lifted and set aside to allow installation of new breathable insulation between rafters and ventilation zone above. Extg tiles to be overhauled, steam cleaned, and reinstated in original location or replaced like for like if damaged.

Proposed Glazed Link between Tool-shed and Dairy: G23 Covered Entrance.

Extg stone quoins and all other stone elements, including sills, steps, plinths, cornices, decorations, mouldings, etc to be steam cleaned to remove all algae, moss, fungi and later paint coatings. Cleaning method to be tested on a limited area and to be modulated to ensure the removal of damaging substances without altering the stone historic patina. All damaged, loose, missing or discoloured stone joints to be repointed with lime mortar to match. All missing/damaged elements to be replaced with new stone sections to match extg.

Extg air brick to be replaced with new heritage cast iron ones.

Extg brick wall, lintels and chimney stacks to be cleaned to remove all algae, moss and fungi. Cleaning method to be tested on a limited areas before application. All damaged, loose, missing or discoloured brick joints to be repointed with lime mortar to match.

WB01.1: replace decayed timber window set with new window to match extg in detailing and appearance. Extg external grate to be replaced with new heritage cast iron grate


Extg ventilation grilles to be replaced with new heritage cast iron ones.

Proposed new glazed frame structure enclosing the existing courtyard, incorporating side-hung glazed door (ref: EDG20.1) for garden access.

Existing Garden Wall blocked up door to be re-opened to form new access between gardens and proposed G23 Covered Entrance.

Main House Proposed East Elevation

1:50 @ A1; 1:100 @ A3

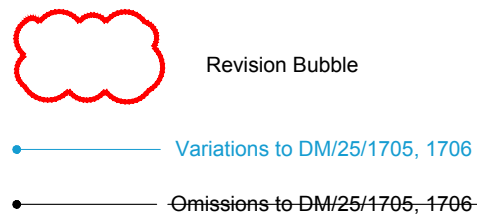

BL Beam Level
CL Ceiling Level
FL Floor Level
DP Down Pipe
HWC Hot Water Cylinder
SVP Soil Vent Pipe
RWP Rain Water Pipe
RWO Rain Water Outlet

Proposed Walls
Existing Walls
Demolition



This drawing is to be used for planning purposes only. Not for construction.

This drawing is the property of Richard Parr Associates. Copyright is reserved by them and the drawing is issued on the condition that it is not copied, reproduced, retained or disclosed to any unauthorised person, either wholly or in part without written consent.

© Copyright Richard Parr Associates

Checked by
JM JM JM

Drawn by
FL MP MP

Date
18.06.25
22.05.26
21.07.26

Description
Planning Issue
Amendments to Planning P01
Amendments to Planning P02

Rev
P01
P02
P03

Job No

335

Project

Sunte House

Title

Main House
Proposed East Elevation

Dwg No

335_MH_DR_00_200

Scale

1:50 @ A1; 1:100 @ A3

Date of First Issue


18.06.25

Rev

P03

Status

Planning

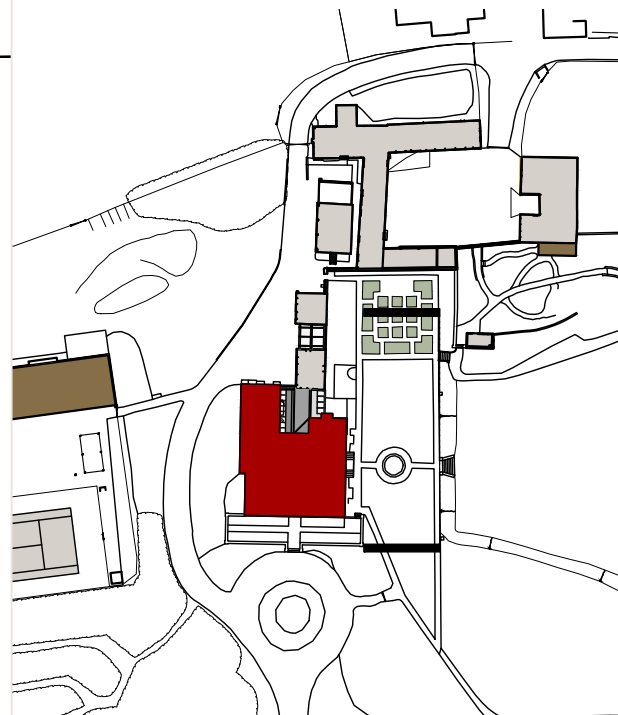

RICHARD PARR
ASSOCIATES

info@richardparr.com
+44 (0)1453 860200
richardparr.com
@richardparrassociates

COUNTRY
Easter Park
Nympsfield, Stonehouse
Gloucestershire GL10 3UL

TOWN
Studio 126
Great Western Studios
65 Alfred Road
London W2 9EU