



P U B L I C O P E N S P A C E



Material specification

- Stainless steel construction,

Product technical sheet

HOOP 0710



3 - 12 years



1 kids




16,2 m²



Physical development



spinning

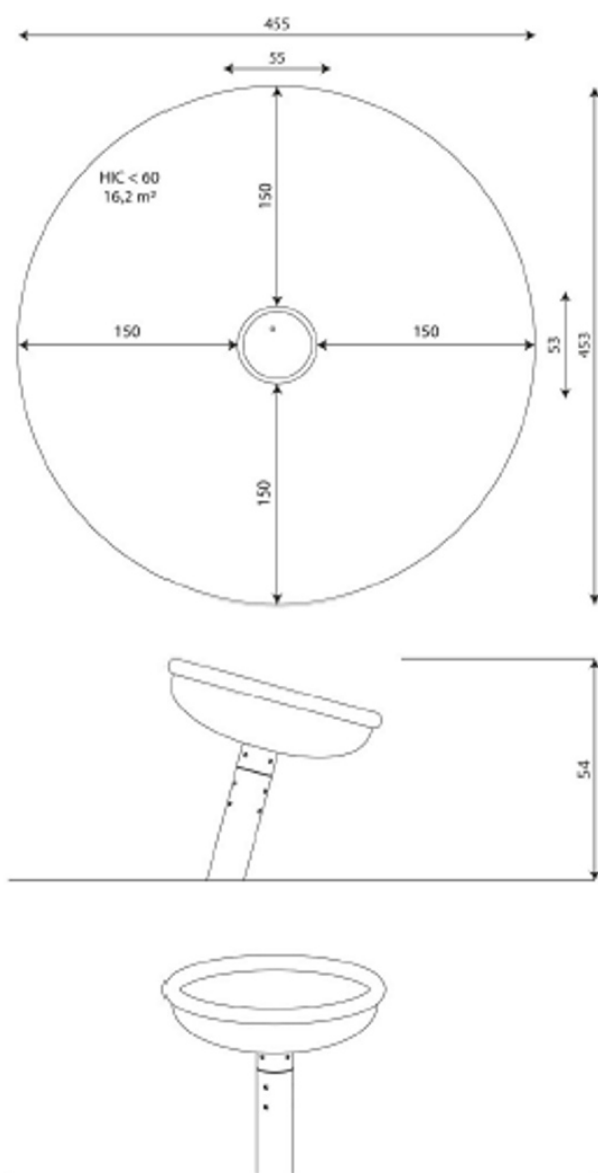

Product technical sheet

HOOP 0710

Product data

Length	55 cm
Width	53 cm
Total height	54 cm
Age group	3 - 12 years
Number of users	1 kids
Safety zone	16,2 m2
Free fall height	<60 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	11 kg
Dimensions of the largest part	100x9x9 cm
Availability of spare parts	YES
Installation time	1 h

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmieing the head, fingers or any other body parts;
- anchoring on flat surface, 90/80/70 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

30

30 year guarantee -
Structural strength of steel
and stainless steel
components

15

15 year guarantee -
Structural failure of steel
and stainless steel, for
dynamic equipment

10

10 year guarantee - Structural
failure of high density
polyethylene and high
pressure laminates
components

5

5 year guarantee - Corrosion of stainless
steel and hot dip galvanized and powder
coated components; against bark beetles
and rot in case of wooden structural
elements

Detailed information in the guarantee card

HOOP 0710

**Amount of safe surface
corresponding with free fall
height:**

HIC <60 16,2 m²

Data is subject to change without prior notice.

Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		60

