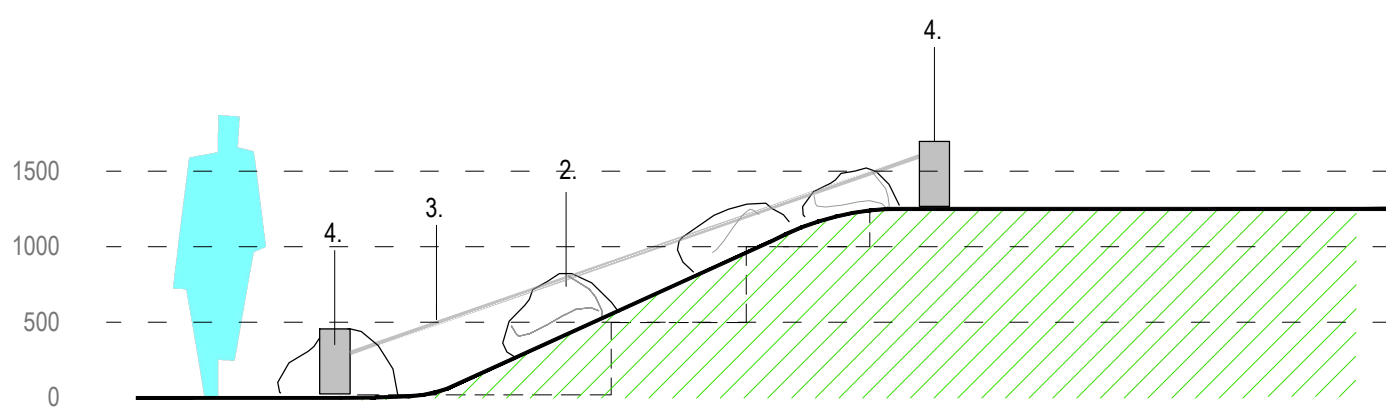


- Existing bank to be regraded.
- Final size and shape of bank assessed on site by contractor and agreed with landscape architect
- Max gradient of bank 1:4 where there is access up a bank
- Max gradient of bank elsewhere 1:2.5
- Play bank to have natural and smooth flowing contours

1.Ekki sleepers planed and sanded
1800mm x 225mm x 150mm. Fixed
with 50mm x 50mm x 450mm stakes.


2.CED Stone Glacial Play Boulders to Landscape Architects approval (contractor to provide photos) sizes vary 600mm -1.5m. Locations to be agreed on site with landscape architect. To be set in concrete foundations.

3. Climbing rope. Polypropylene climbing rope (30mm dia.) with stainless steel rope holder and plastic sleeve bottom.

4. Ekki posts in galvanised sleeves, set in concrete foundations 600mm x 600mm set into ground min 1000mm (or to suit sub contractors design).

5. Supplier: Duncan & Grove **or equal approved**
Product : Stainless steel play slide,
1.5m high x 1 m wide.
Min 30deg angle to suit angle of new
earth play mound. Foundations
600mm x 600mm set into ground
1000mm (or to suit sub contractors
design)

6. Tiger mulch safety surfacing to be designed by contractor to reflect critical fall heights and site conditions. For costing allow 80mm depth

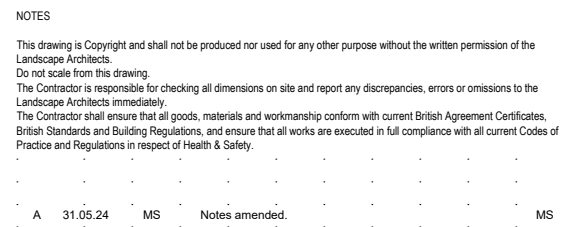

Rev	Date	By	Description	Ckd
-----	------	----	-------------	-----



Drawing Status N
 For Planning 

Project:
Victoria Park

Drawing Title:

Technical Details -
Play Bank [P-07 / P-08 / P-09]

Client:
Mid Sussex District Council

Scale:	Job No.:
as shown @ A2	23-741

Date:	Drawing No.:
09.06.23	741-368