


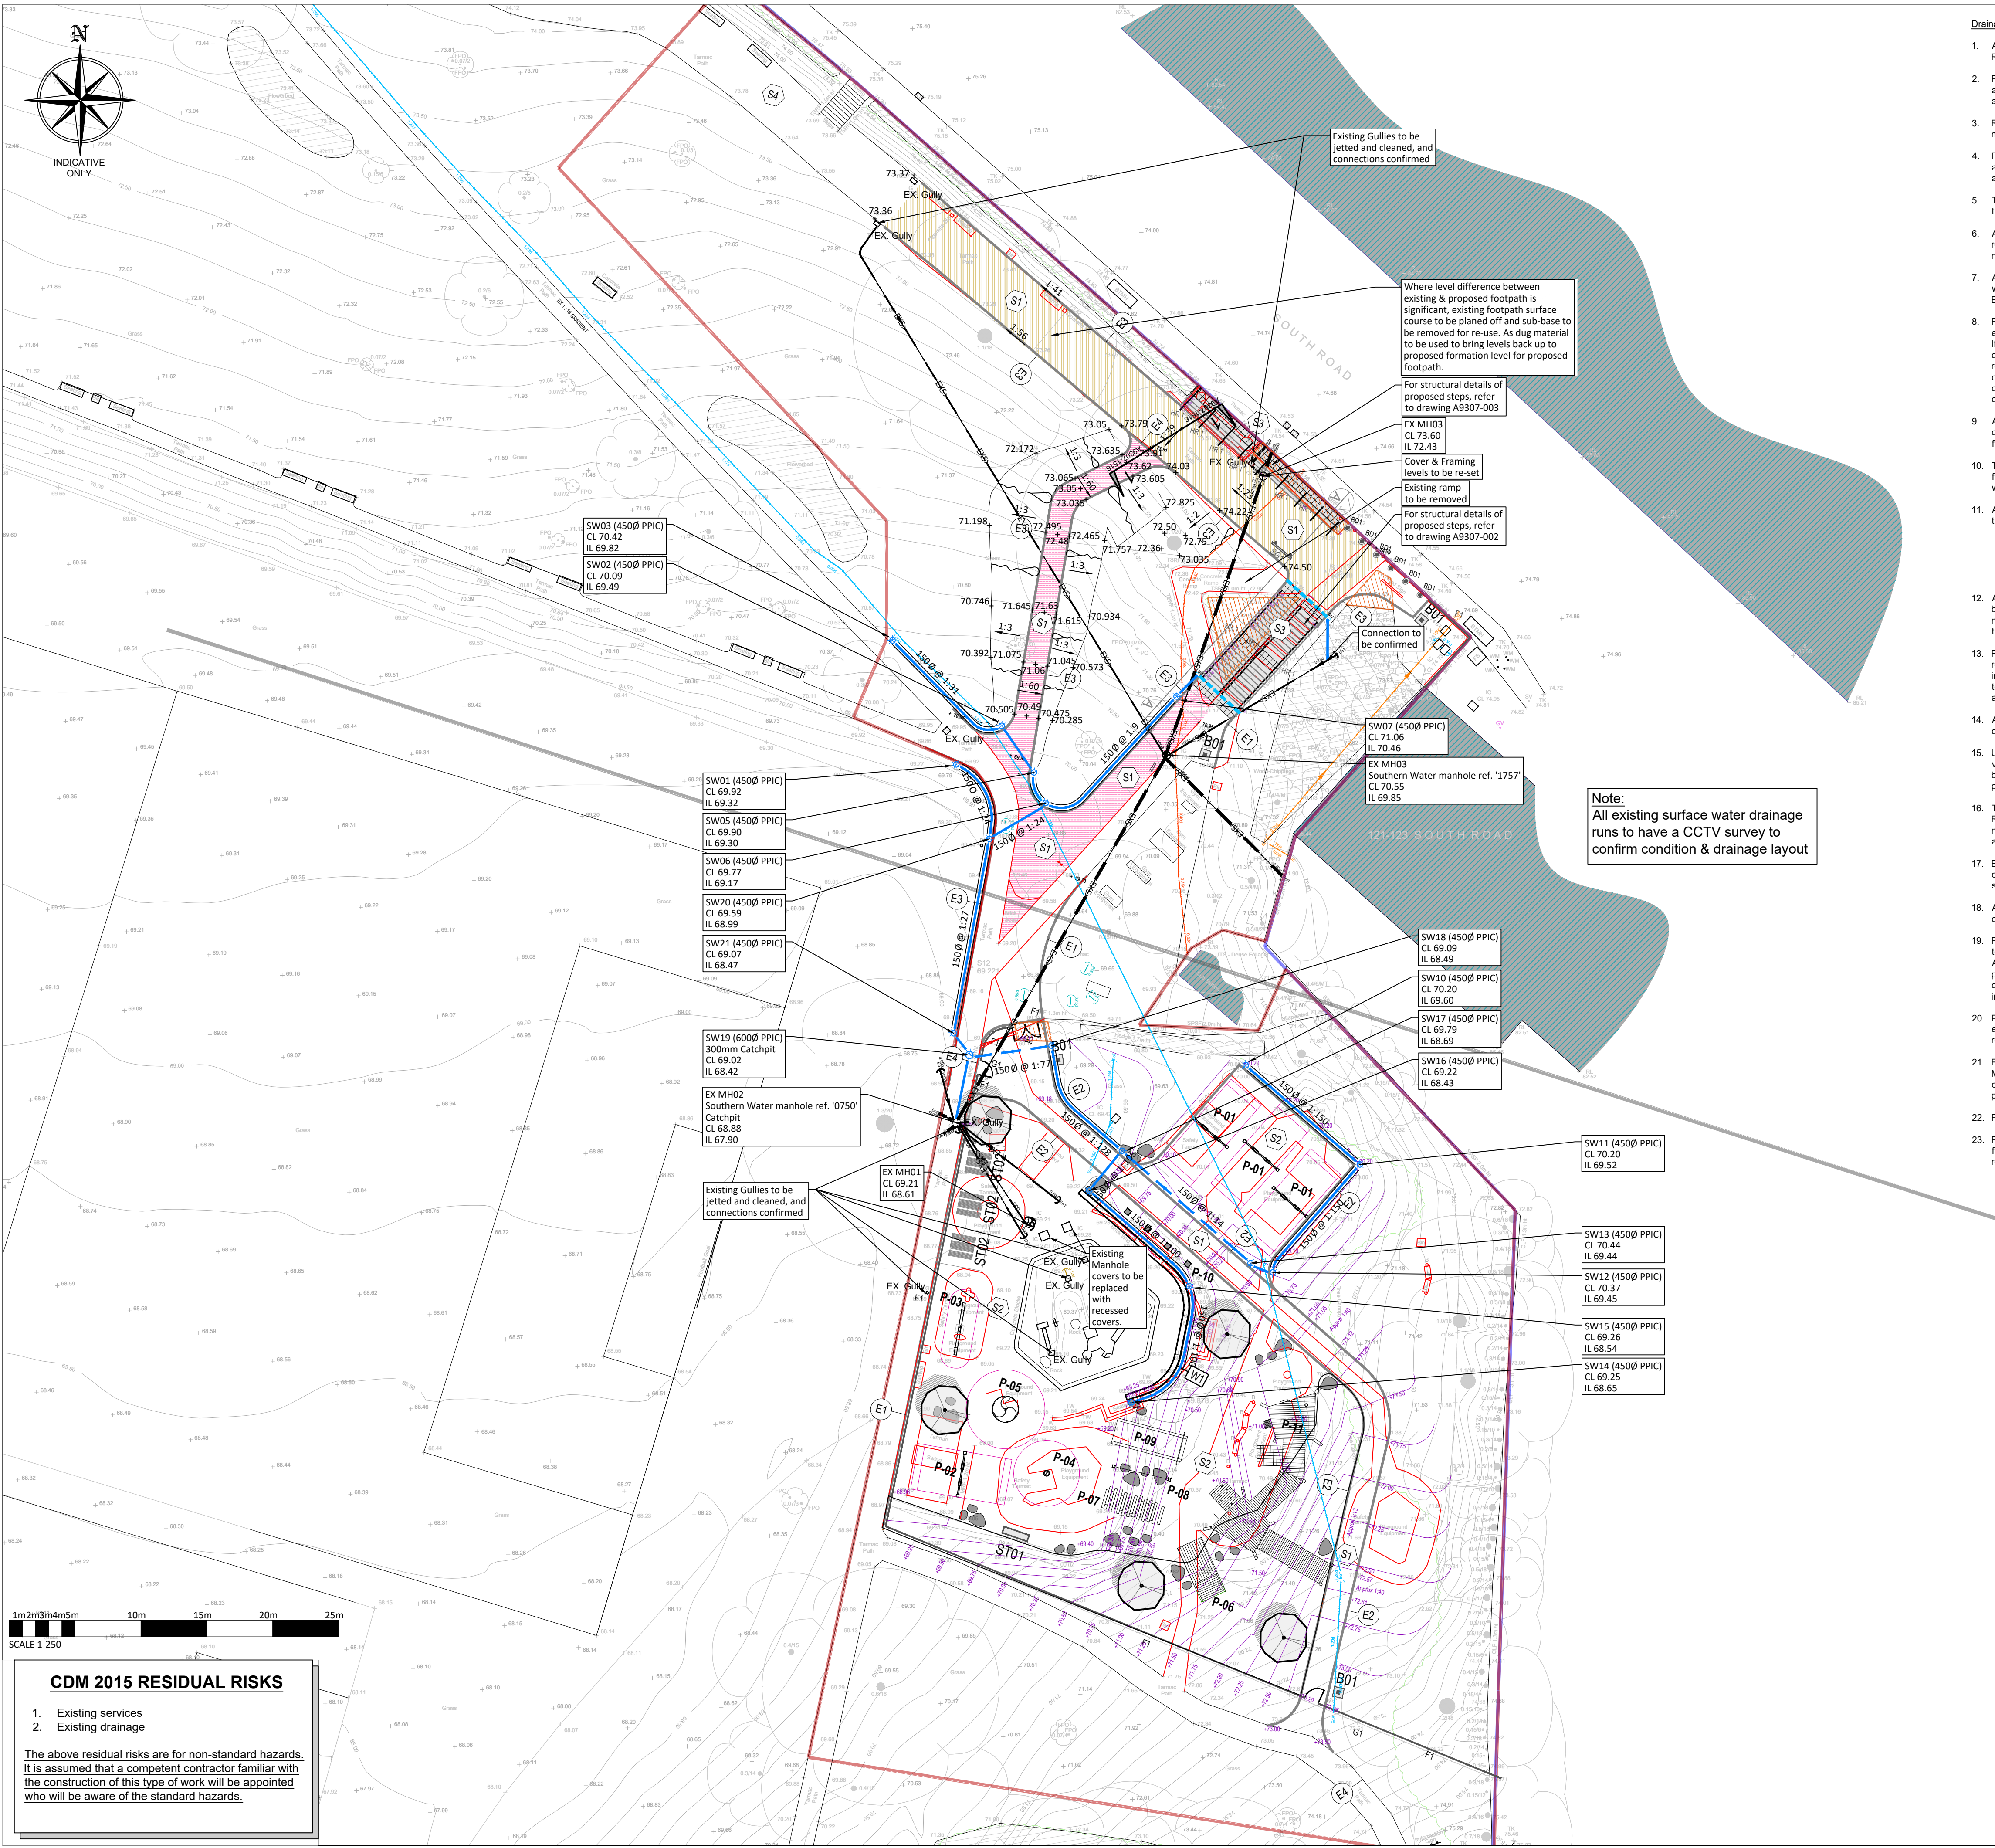

Drainage Notes

- All private drainage works shall be constructed in accordance with Building Regulations Approved Document H (latest edition) and BS EN 752.
- Prior to commencement of the works the contractor shall liaise with all relevant authorities to obtain their requirements, work method approval and where appropriate the intended choice of materials.
- Refer to topographical survey for details of existing site conditions and bench marks.
- Prior to commencement of the works the contractor shall liaise with all relevant authorities to locate, protect and where necessary divert all existing services affected by the works.
- The contractor shall ensure the stability of all excavations is maintained at all times and all excavations shall be kept free of standing water.
- All works in, or adjacent to, the public highway shall be in accordance with the requirements of the Highway Authority. The contractor shall obtain all necessary licenses required to carry out the works within the public highway.
- All works to new or existing public sewers shall be to the approval of the local water authority and in accordance with 'Sewerage Sector Guidance' - Latest Edition.
- Prior to commencement of the works all drainage outfall points, whether existing sewer, drain or watercourse, shall be verified on site by the contractor. If the outfall point is found to be higher or significantly lower than shown on the drawings then the design engineer shall be notified immediately (significant redesign of drainage and levels may be necessary). Prior to commencement of construction on-site the contractor shall install all off-site drainage connections, or satisfy himself that there are no obstructions or other reasons why the drain connections can not be made.
- All cover levels shown on this drawing are approximate, exact levels of new covers and frames are to be determined on site to match level and profile of finished surface.
- The construction of all existing chambers, gullies and their covers, gratings and frames to be improved, repaired or replaced as necessary to suit their location within the finished development.
- All covers, gratings and frames to chambers, gullies, channels etc, shall be of the correct load class to suit their location.

Load Class A15

Load Class B125

Load Class C250

Load Class D400

Pedestrian areas (not accessible by vehicles)

Private drives

Basements / parking bays / lightly trafficked roads

Main roads
- All existing chambers, gully channels, pipes and other drainage apparatus shall be protected from damage during the works. The contractor shall take all necessary measures to ensure that no material enters the drains (other than that which they are designed to carry).
- Refer to site investigation report for existing ground conditions and any special requirements for buried concrete (special requirements for buried concrete shall include all pre-cast and in-situ concrete and mortars). Where appropriate refer to contamination reports for details of chemicals affecting choice of materials and other additional requirements.
- All pre-cast and in-situ concrete and mortars used in the construction of foul drains and sewers shall be made from sulphate resisting cement.
- Unless noted otherwise all pipework shall be constructed from 'super strength' vitrified clay to BS 65, BS EN 295 or UPVC to BS EN 1401 bedded and backfilled as per the manufacturer's recommendations and the above listed publications.
- The contractor's attention is drawn to Diagrams 7 and 8 of 'The Building Regulations Approved Document H' showing details of drains laid below and near to buildings. Where ground beams are used, their level shall be set to avoid clashing with drain connections.
- Exact location of gullies to be determined on site to suit low points, the contractor shall ensure that all finished surfaces are laid to falls that are sufficient for all surface water to drain without surface ponding.
- All drainage channels to be by ACO or similar and to be of a type, size and capacity suitable for their location.
- Private access fittings, inspection chambers and manholes shall be constructed to the dimensions shown in Tables 11 and 12 of 'The Building Regulations Approved Document H' and from the materials listed in Table 14. Access points, inspection chambers and manholes shall be constructed from products designed/rated for the location in which they are to be used. They shall be installed in accordance with the manufacturer's/supplier's recommendations.
- Prior to commencement of any works the existing drainage must be traced to ensure that no 'live' connections remain, any such connections must be reported to the contract administrator, prior to diversion into the new drains.
- Existing pipes to be abandoned shall be broken out or filled with PFA grout. Manholes shall be broken out and filled with compacted granular material, complying with structural engineer's requirements when within the vicinity of a proposed or existing structure
- Pipes at manholes to be soffit to soffit unless noted otherwise.
- Pipes passing through foundations and structures shall be sleeved and have flexible pipe joints located on both sides in accordance with the building regulations and structural engineer requirements.



NOTES

- DO NOT SCALE THIS DRAWING. WORK TO FIGURED DIMENSIONS ONLY. ALL DIMENSIONS ARE IN MILLIMETRES (mm) UNLESS NOTED OTHERWISE.
- This drawing is to be read in conjunction with all relevant Architect's, Engineer's and Specialist's drawings and their respective Specifications.
- All work to comply with the relevant British Standards, Codes of Practice and the Building Regulations.
- Any discrepancies between all working drawings, specifications and schedules of all disciplines to be immediately notified to CTP for clarification/correction prior to construction of relevant structure.

Key	
xx.xx+	Proposed Level
1:xx	Proposed Gradient
	Banked Slope
CL xx.xxx IL xx.xxx xx @ 1:xx	Private Surface Water Sewer
4500 6000	Surface Private 4500/6000 PPIC
100mm ACO Multi Drain (Private)	
	Existing Water Main taken from CCTV survey
xx @ 1:xx	S.W. 1500 Perforated Pipe in Trench
CL xx.xxx IL xx.xxx xx @ 1:xx	Existing Surface Water Sewer
EX Gully	Existing Gully
S1	Surfacing Plan (refer to Allen Scott dwg no. 741-355 for details)
E1	Edging Plan (refer to Allen Scott dwg no. 741-356 for details)
P-01	Play equipment (refer to Allen Scott dwg no. 741-361 to 741-370 for details)
ST01	Bench equipment (refer to Allen Scott dwg no. 741-351 to 741-352 for details)
B01	Proposed Litter Bin (refer to Allen Scott dwg no. 741-360 for details)
BD1	Proposed Bollard (refer to Allen Scott dwg no. 741-354 for details)
SG1	Proposed Entrance Sign (refer to Allen Scott dwg no. 741-359 for details)
G1	Proposed Gates (refer to Allen Scott dwg no. 741-359 for details)
F1	Proposed Fencing (refer to Allen Scott dwg no. 741-359 for details)
HR1	Proposed Metal Hand Rails
	Proposed Asphalt with new binder and wearing course
	Proposed Asphalt - Full Build-up

PRELIMINARY

P06	Amendments as per comments	24.05.24	SV	AK
P05	Amendments as per comments	08.05.24	SV	AK
P04	Footpath arrangements included	18.04.24	SV	AK
P03	Chambers added	27.03.24	SV	AK
P02	Minor revisions to drainage as indicated	29.11.23	SF	SM
P01	Preliminary Issue	13.11.23	SF	SM

Revision	Amendments	Date	Rev'd	Chk'd
SF		November 2023		CIVIL



Suffolk House 154 High Street
Sevenoaks Kent TN13 1XE UK
UK: +44 (0)1732 740195
www.ctp-llp.com

Project Title:

VICTORIA PARK

Drawing Title:

ENGINEERING LAYOUT

Drawing Number:

A9307-1510

Scale:

1:250 @A1

Unless Noted Otherwise

P06

CDM 2015 RESIDUAL RISKS

- Existing services
- Existing drainage

The above residual risks are for non-standard hazards. It is assumed that a competent contractor familiar with the construction of this type of work will be appointed who will be aware of the standard hazards.