


Impact	No. of Trees
Trees to be removed	50
Groups of trees to be removed	4
Groups of tree to be partially removed	6
TPO trees to be removed	0
Trees to be pruned	8
Trees where manual excavation needed within RPAs	20
Trees where above soil surfacing needed within RPAs	43
Trees with proposed underground services within RPAs	0


Total numbers of trees to be removed			
Category	No. of trees	Category	No. of trees
A	0	B	4
C	31	U	15

Pruning is to be undertaken in accordance with the British Standard Recommendations for Tree work, BS3998: 2010.
Climbing irons or spikes are not to be used whilst pruning trees.

Trees that require above soil surfacing within RPAs		
No.	Species	Type of structure
2	English oak	Proposed internal road
4	English oak	Proposed internal road
15	English oak	Proposed internal road
16	English oak	Proposed internal road
27	English oak	Proposed footpath
28	Ash	Proposed footpath
50	Sycamore	Proposed footpath
51	Ash	Proposed footpath
53	Ash	Proposed footpath
56	Ash	Proposed footpath
57	English oak	Proposed footpath
92	English oak	Proposed footpath
106	English oak	Proposed footpath
118	English oak	Proposed footpath
120	English oak	Proposed footpath
121	English oak	Proposed footpath
125	English oak	Proposed footpath
126	English oak	Proposed footpath
127	English oak	Proposed footpath
129	English oak	Proposed footpath
136	English oak	Proposed footpath
137	English oak	Proposed footpath
140	English oak	Proposed footpath
141	English oak	Proposed footpath
142	English oak	Proposed footpath
143	English oak	Proposed footpath
144	English oak	Proposed footpath
157	Ash	Proposed footpath
158	Ash	Proposed footpath
164	English oak	Proposed footpath
165	English oak	Proposed footpath
171	English oak	Proposed footpath
180	Sycamore	Proposed footpath
182	English oak	Proposed footpath
186	English oak	Proposed footpath
193	English oak	Proposed internal road
221	English oak	Proposed footpath
227	Sycamore	Proposed footpath
231	Scots pine	Proposed footpath
232	Sycamore	Proposed footpath
485	Holly	Proposed footpath
486	English oak	Proposed footpath

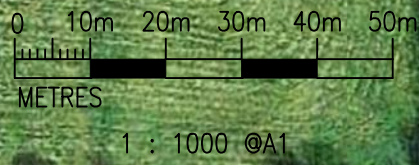

To be erected prior to the commencement of all works on site, and retained in place throughout construction. To comprise either 2.4m wooden site hoarding; or a 2m high scaffolding framework, with uprights at maximum 3m spacings, every other one braced to the ground with 45 degree struts; supporting standard anti-climb 'Heras' welded mesh fence panels secured with anti-lift devices to concrete or plastic bases pinned to the ground by scaffold uprights sunk to a minimum depth of 600mm; individual panels fixed to each other with at least 2 clamps and to scaffolding with heavy-duty cable ties. "TREE PROTECTION ZONE - KEEP OUT" or similar notices to be attached to every fifth panel.



 Above Soil Surfacing

Arboricultural Supervision

The arboricultural consultant will directly supervise all construction works that have to be undertaken within root protection areas. These include:

1. Location of protective fencing and ground protection.
2. Construction of above-ground hard surfacing.
3. All excavations, whether for proposed foundations, hard surfacing, or underground services.


ARBOCULTURAL PLANNING CONSULTANTS

Project: Hurst Farm

Client: WSP

Drawing: TREE PROTECTION PLAN

Drawing no: SJA TPO 23497-041

Based on: C5116_010-11 Rev M

Drawn by: WFH/NHK/FJC

Date of Issue: Jan 2024

Scale: 1: 1,000@ A1

Checked by: Tel.(01737) 813058

sja@sjatrees.co.uk

Tree nos. ● 472	Category 1/9 trees: ● 1192	Category 1/9 trees to be retained: 
Category 'A' RPA: 	Category 'B' RPA: 	Category 'C' RPA: 
Trees to be removed: 	Protective fencing: 	Trees to be pruned: 
Above soil surfacing: 	Manual excavation: 	Indicative pruning line: 

For further information refer to the SJAtrees Tree Survey Schedule.

Do not scale from this drawing, please check all dimensions on site, and notify us of any discrepancies. SJAtrees (the trading name of Simon Jones Associates Ltd) cannot be held responsible for inaccuracies in the topographical plan on which this drawing is based.

© Simon Jones Associates Ltd. 2024

This drawing is copyright and may not be used or changed without the written consent of SJAtrees.

This drawing is based on the proposed layout plan shown and referred to above.

SJAtrees (trading name) in reproduction, without amendment, by the Local Planning Authority (PLA), and by its posting on the PLA website, to assist in consideration of this application only.

This drawing is designed to reflect only the principles of layout and for design insofar as these relate to the protection of trees to be retained, and should NOT be read as a definitive engineering or construction method statement. Reference should be made to the architect or structural engineer, as appropriate, over any matters of construction detail or specification, or any engineering standards or regulatory requirements relating to proposed structures, hard surfaces or underground services.