


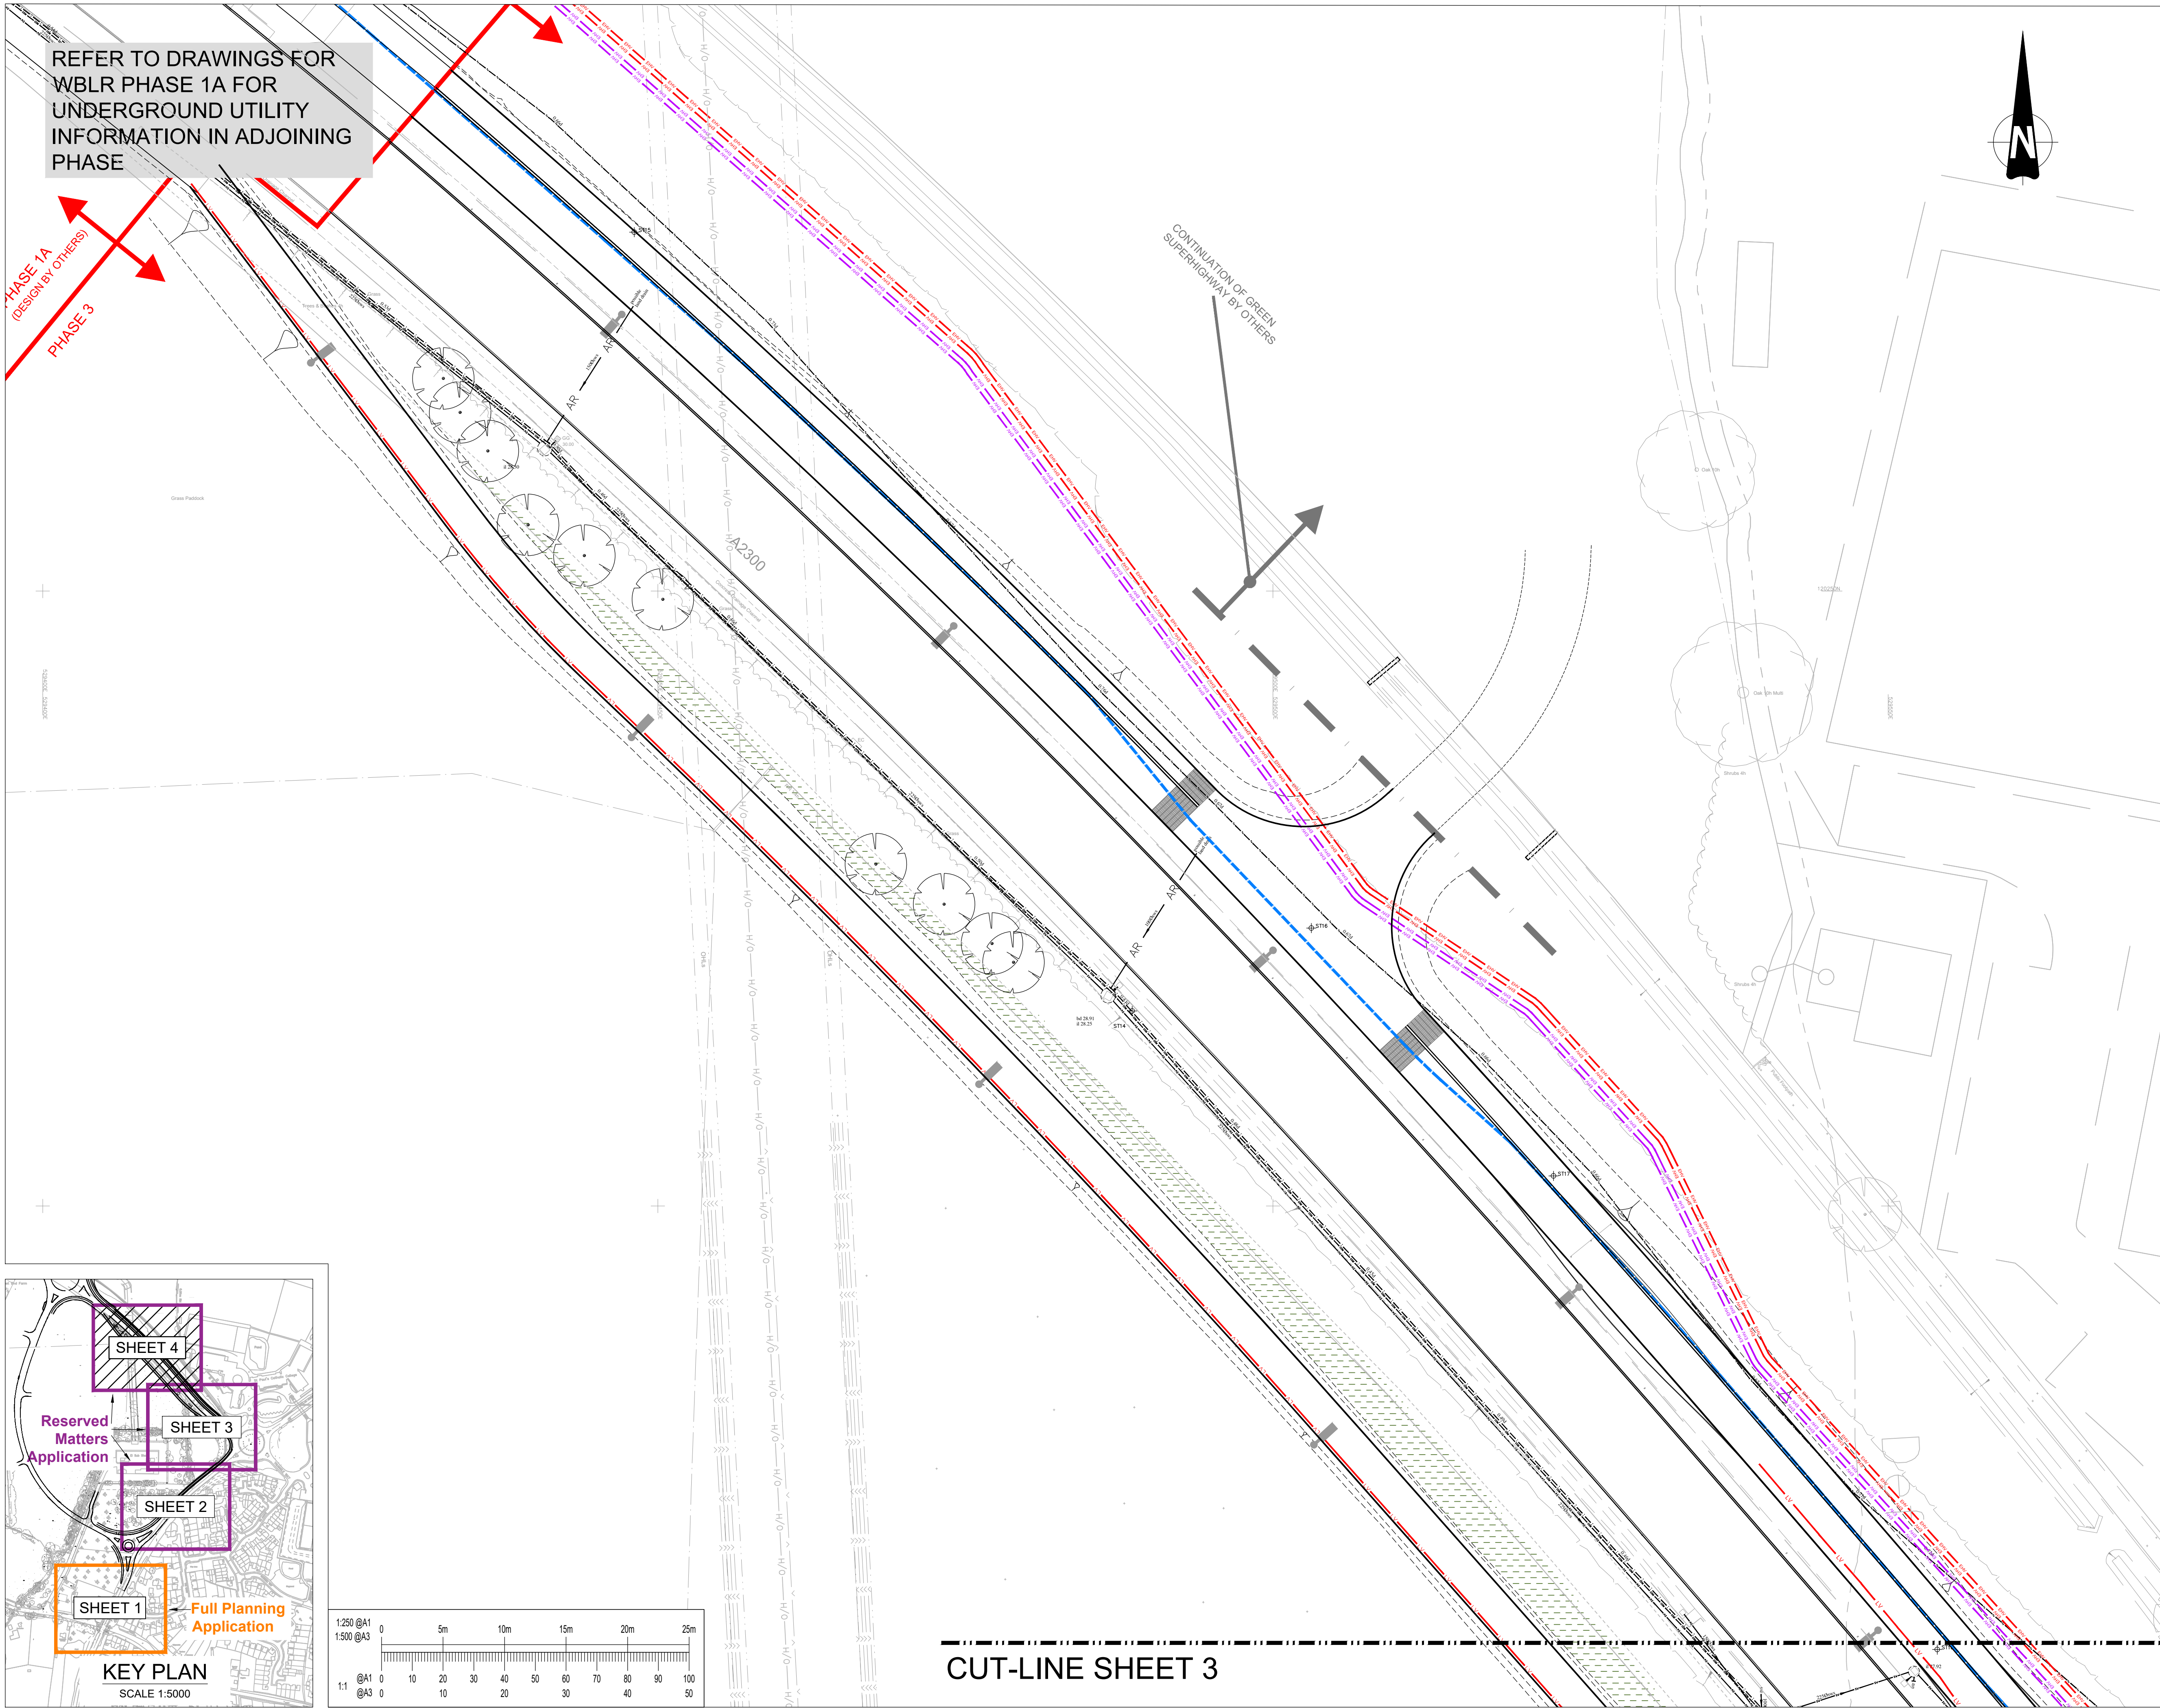

This drawing should not be scaled. Dimensions to be verified on site.
Any discrepancies should be referred to the Engineer prior to work being put in hand.

This drawing is the property of Waterman Infrastructure & Environment Limited, and the drawing is issued on the condition that it is not copied, reproduced, related or disclosed to any unauthorised person, either wholly or in part without the consent in writing of Waterman Infrastructure & Environment Limited
Pickfords Wharf, Clink Street, London SE1 9DG 1 020 7928 7888 f 03333 444 501

GENERAL NOTES

- NOTES:
- THE LOCATION & DETAILS OF EXISTING UTILITIES SHOWN ON THIS DRAWING IS BASED ON PLANS RECEIVED FROM MIDLAND SURVEY LTD 2020.
 - SHE INFORMATION TO BE COMPLETED DURING DETAILED DESIGN STAGE.

KEY:

EXISTING UTILITIES TAKEN FROM GPR SURVEY:

- ELECTRIC CABLE
- WATER PIPE
- FOUL SEWER
- STORM SEWER
- COMBINED SEWER
- DATA CABLE
- TELECOM CABLE
- UNIDENTIFIED SERVICE
- TAKEN FROM RECORDS

SERVICES NEW SUPPLIES:

- PROVISIONAL ROUTE OF 132 KV ELECTRIC CABLES INTENDED TO BE INSTALLED BY UKPN IN 2024. EXACT/AS BUILT ROUTE TO BE CONFIRM FOLLOWING INSTALLATION.
- NEW 150mm Ø DUCTING FOR 11KV ELECTRICAL SUPPLY.
- LOW VOLTAGE ELECTRICAL SUPPLY FOR STREET LIGHTING (ROUTE AND POINT OF CONNECTION TO EXISTING NETWORK TO BE CONFIRMED DURING DETAILED DESIGN)
- NUMBER OF NEW DUCTS
- WATERMAIN ROUTE (SOUTH EAST WATER)
- SLUICE VALVE
- FIRE HYDRANT/WASHOUT.

P05	08.10.24	SHE BOX REMOVED, CROSS SECTION ARROWS ENLARGED	MK
P04	27.09.24	FOR PLANNING	JTCL
P03	10.09.24	PROPOSED WATERMAIN ROUTE SHOWN	MK
P02	20.12.23	132 KV CABLE AND 2NO. SPARE DUCTS INSTALLED BY UKPN. ROUTE IS UPDATED FOLLOWING THE UPDATE MADE BY UKPN DURING DETAILED DESIGN.	UF
P01	11.04.23	PRELIMINARY ISSUE	UF
Rev	Date	Description	By

Amendments	
Project	WBLR Phase 3
Title	STATUTORY UNDERTAKERS DIVERSIONS & NEW SUPPLIES SUMMARY SHEET 4 OF 4



FOR PLANNING			
Designed By	UF	Checked By	SP
Drawn By	UF	Date	MARCH, 23
Project	Originator	Volume	Level
19442-WIE-ZZ-XX-DR-C-960034			
Revision			P05