


Qty	Botanical Name	Form	Age/ Times Trans	Girth (cm)	Overall Height	Clear Stem	Root Condition
TREES							
3	<i>Betula pubescens</i>	Multi stem	4xtr	-	2.5-3m	-	WRB
6	<i>Acer campestre</i>	Semi mature	4xtr	18-20	5-7m	2	WRB
2	<i>Acer campestre</i>	Multi stem	4xtr	-	2.5-3m	-	WRB
9	<i>Alnus glutinosa</i>	Semi mature	4xtr	18-20	5-7m	2	WRB
4	<i>Betula nigra</i>	Semi mature	4xtr	18-20	5-7m	2	WRB
2	<i>Betula nigra</i>	Multi stem	4xtr	-	2.5-3m	-	WRB
3	<i>Betula pubescens</i>	Semi mature	4xtr	18-20	5-7m	2	WRB
3	<i>Corylus avellana</i>	Multi stem	4xtr	-	2.5-3m	-	WRB
5	<i>Quercus robur</i>	Semi mature	4xtr	18-20	5-7m	2	WRB
Qty	Species	Overall height/spread	Root Condition	Pot Size	Habit	Minimum number of breaks	Density/m ²
NATIVE MIXED HEDGING @ 4 per sq m							
1040	<i>Acer campestre</i>	90-120	BR	1+2 trans	Bushy	-	20%
1040	<i>Alnus glutinosa</i>	90-120	BR	1+2 trans	Bushy	-	20%
780	<i>Comus sanguinea</i>	90-120	BR	1+2 trans	Bushy	-	15%
780	<i>Corylus avellana</i>	90-120	BR	1+2 trans	Bushy	-	15%
260	<i>Ilex aquifolium</i>	40-60	C	3L	Bushy	-	5%
520	<i>Prunus avium</i>	90-120	BR	1+2 trans	Bushy	-	10%
260	<i>Rosa canina</i>	90-120	BR	1+2 trans	Bushy	-	5%
520	<i>Viburnum opulus</i>	90-120	BR	1+2 trans	Bushy	-	10%

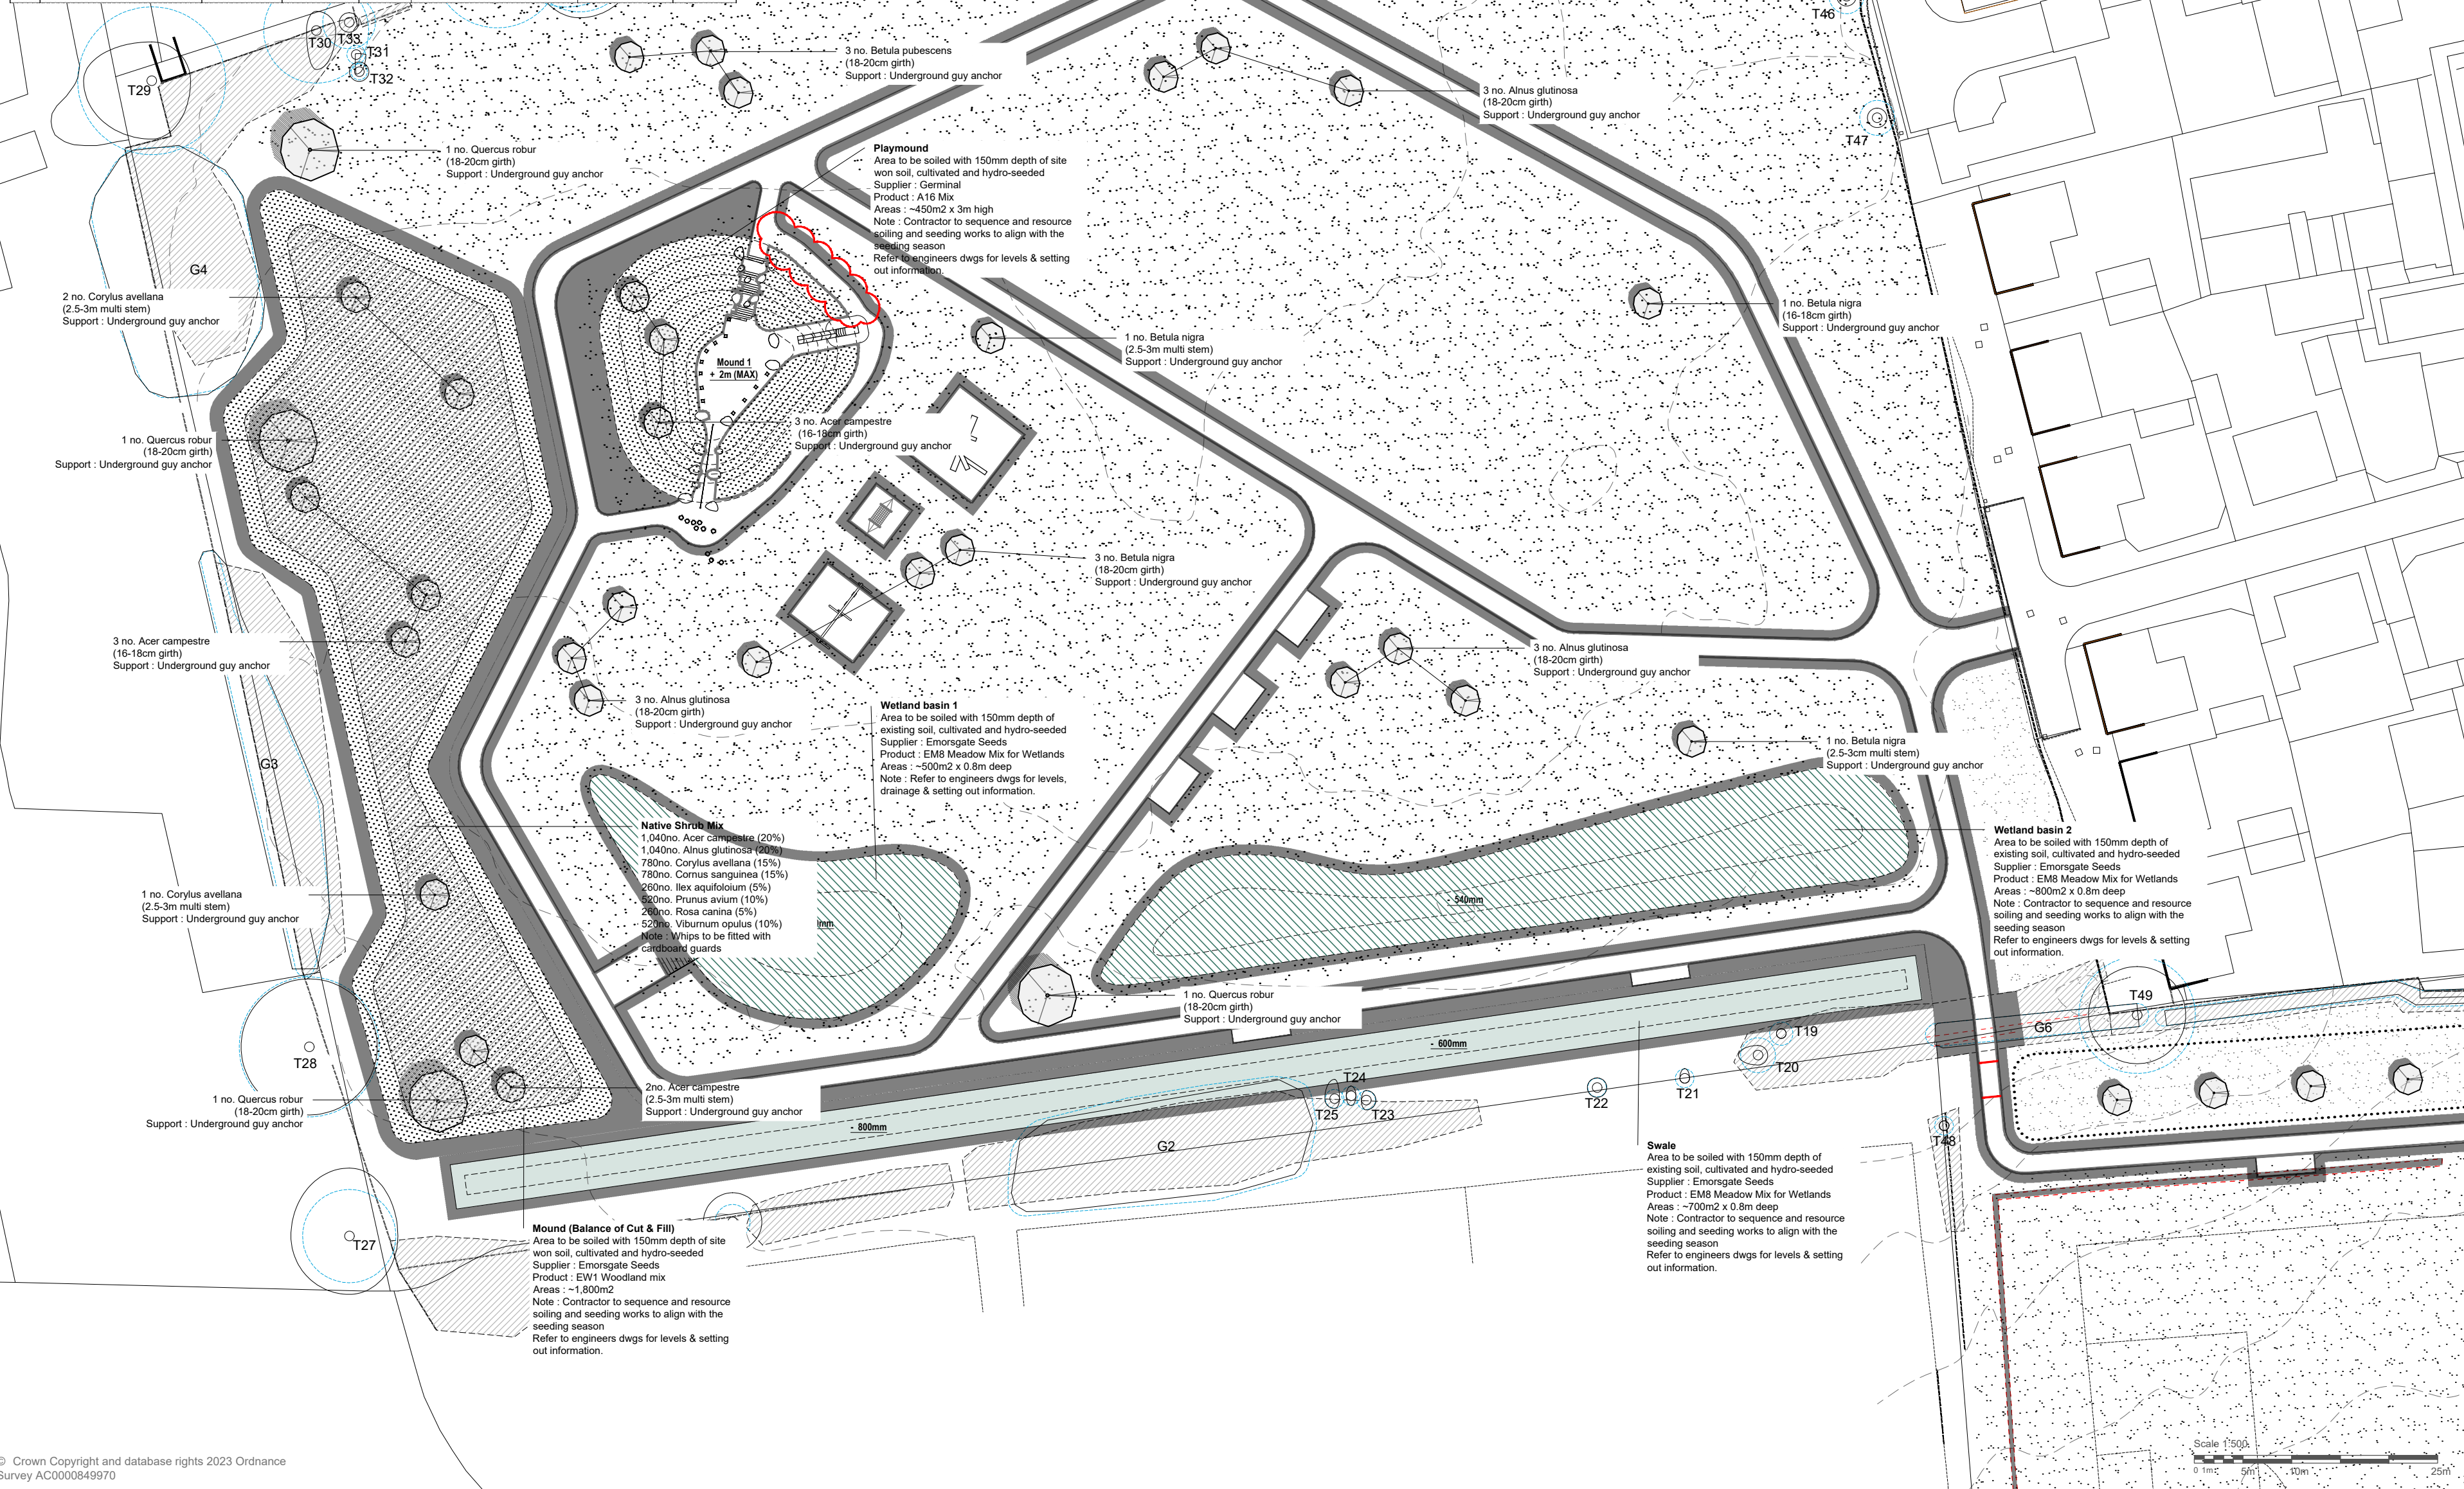

- | LEGEND | |
|--------|--|
| | Site boundary |
| | Original layout removed |
| | Retained layout |
| | Proposed layout / edges |
| | Existing trees to be retained |
| | Existing trees to be removed above ground & stump ground |
| | Proposed tree (refer to planting plans) |
| | Existing planting to be retained |
| | Proposed native shrub planting and hydroseeded with Emorsgate EW1 Woodland Mix |
| | Existing planting to be removed |
| | Existing areas of grass to be retained and managed a grassland meadow |
| | Proposed wetland (Refer to Engineers Drgs) to be hydroseeded with Emorsgate EM8 Mix |
| | Proposed vegetated swale. (Refer to Engineers Drgs) to be hydroseeded with Emorsgate EM8 Mix |
| | Proposed earth bunds to be hydroseeded |
| | Verges / existing areas of grass to be reinstated and hydroseeded with Germinal A16 mix |
| | Existing levels |
| | Proposed levels (refer to engineers details) |

NOTE:

Refer to Scheduling, Detailed Planting Dwg Series and Plant Specifications for location and plant species.

- Soiling levels to be reduced / brought up to levels required to achieve the planting depths specified.
- Final tree positions to be marked out on site by the landscape architect / CA
- Tree pits to have base and sides broken up / scarified by hand or by forking
- Pits to be water tested to ensure that they are free draining. Contractor to photograph each exposed pit and video water test
- Backfill topsoil in layers not exceeding 300mm and lightly 'settled' rather than compacted between layers.
- An important topsoil to be of good quality, with a light texture and confirm to BS 3852 'Multi Purpose' category.
- Trees to be mulched with 50mm depth of Melcourt 'Ornamental Grade Bark Mulch'.
- All pits shall be at least twice the spread of the rootball and with a minimum size of 1200x1200mm and where necessary the depth shall be increased to accommodate the depth of the roots, obtaining the correct planting level and appropriate planting conditions
- All works to be in strict accordance with Allen Scott Specification for Landscape Works.
- Any areas of soft damaged by works to be de-compacted and re-turfed by contractor
- All services to be identified on site before excavations occur
- All planting to be derived from the nominated nursery
- All planting to be set out with LA on site prior to planting. Give min 1 weeks notice prior to plant stock arriving on site
- All plants must be well watered in directly after planting and mulched
- Contractor must monitor soil moisture & plant conditions closely after planting & during maintenance to ensure that a watering regime is established quickly & diligently as soon as soil / plants show signs of drying out / stress
- All planting to be maintained by contractor for a period of 12months post practical completion.
- IF IN DOUBT ASK

drawing is Copyright and shall not be produced nor used for any other purpose without the written permission of the
the
scale from this drawing.
Contractor is responsible for checking all dimensions on site and report any discrepancies, errors or omissions to the
the
Contractor shall ensure that all goods, materials and workmanship conform with current British Agreement Certificates,
Standards and Building Regulations, and ensure that all works are executed in full compliance with all current Codes of
and Regulations in respect of Health & Safety.

17-12-24	JP	Making good adjusted associated with new connecting footpath adjacent to play mound	JP
30.05.24	MS	Mound 1 height amended	MS

Date	By	Description	Ckd
------	----	-------------	-----



**ALLEN SCOTT
LANDSCAPE
ARCHITECTURE**

ing Status			
For Planning			
ect:			
msleys Meadows & Finches Field			
ing Title:			
Planting Plan - North			
t:			
Sussex District Council			
r: 00 @ A2		Job No : 23-739	
01.23		Drawing No.: 739-400	