


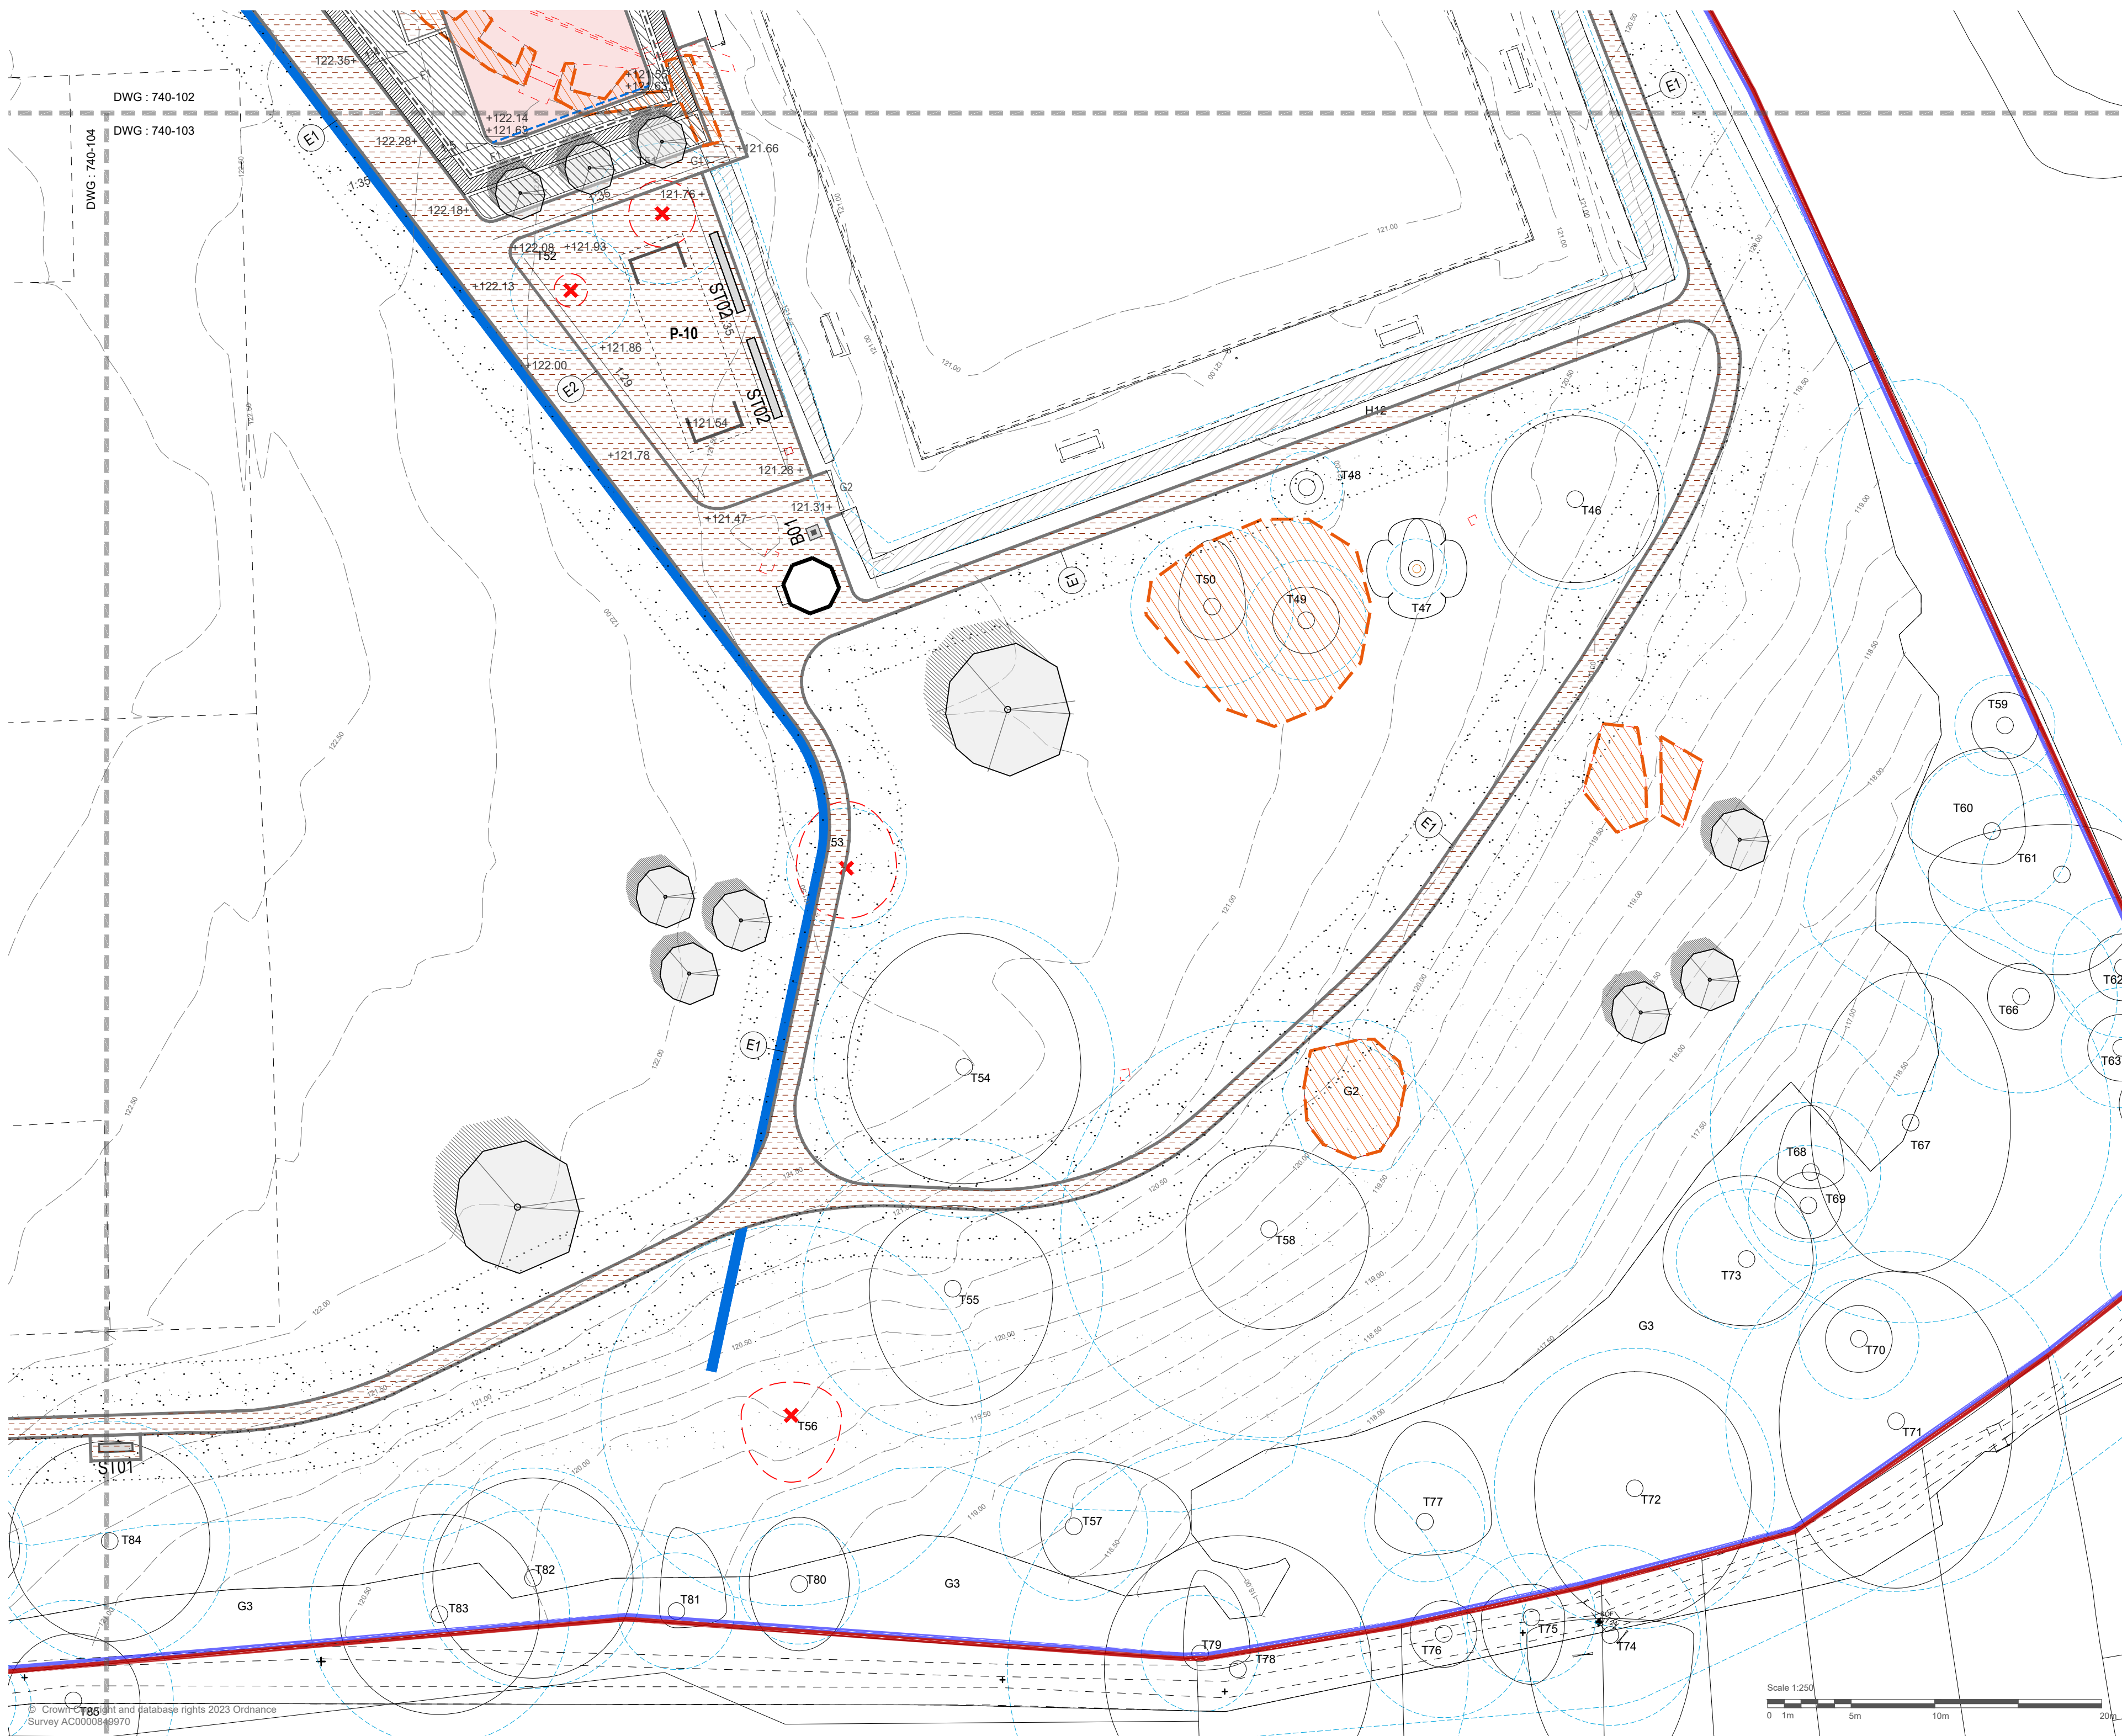

Site ownership boundary

Planning application site boundary

Original layout removed

Retained layout

Proposed layout / edges

Existing trees to be retained

Existing trees to be removed above ground & stump ground

Proposed tree (refer to planting plans)

Existing planting to be retained

Proposed hedge

Proposed ornamental shrub planting

Existing planting to be removed

Existing grass areas to be reinstated, made good and seeded with meadow mix.

Existing levels

Proposed levels (refer to engineers details)

Note : Refer to surfacing plans and engineers dwgs
S1 - Existing asphalt with new tar spray and chip dressing
S2 - Existing asphalt plane off and relay new wearing course and new tar spray and chip dressing
S3 - Proposed asphalt surfacing
S4 - Proposed asphalt with tar spray and chip dressing
S5 - Proposed Breasted gravel
S6 - Proposed in-situ concrete
S7 - Proposed clay pavers
S8 - Proposed granite sets
S9 - Proposed WefiFour play safety surface
S10 / S11 - Proposed TigerMulch safety surface (refer to surfacing & clearance plans)
S12 - Existing permeable MUGA asphalt. Plane off and relay new open grade MUGA wearing course

E1 - Proposed 38mm tanalised timber edging
E2 - Proposed flush metal edging
E3 - Proposed PCC edging

ST01 - Proposed 1.8m bench
ST02 - Proposed 4m long timber bench
ST03 - Proposed picnic table
ST04 - Proposed tree seat

P01 - Proposed play elements (Refer to detailed Dwgs)
EP01 - Existing play elements to be refurbished (Refer to schedule)

B01 - Proposed litter bin (Refer to details)
B02 - Proposed dog bin (Refer to specification)

BD1 - Proposed removable bollard (Refer to details)

CS - Proposed cycle stands (Refer to details)

Proposed paths / surfacing
(Refer to clearance and surfacing plans)

Proposed safety surface
(Refer to clearance and surfacing plans)

F1 - Proposed 1.2m flat bar fence (Refer to details)
F2 - Proposed 3.0m weldmesh MUGA fence (Refer to details)
F3 - Proposed timber knee rail (Refer to details)

G1 - Proposed self closing 1.2m high flat bar play gate
G2 - Proposed Double leaf MUGA gate

Proposed drainage
(Refer to engineers dwgs)

LR - Existing light column to be removed
L1 - Position of relocated existing light column (refer to specification)
L2 - Existing light column to be retained (no works)

ES1 - Proposed external store (Refer to details)

W1 - Proposed wall (Refer to engineers details)
W2 - Existing brick wall to retained & repaired (Refer to specification)

NOTES

This drawing is Copyright and shall not be produced nor used for any other purpose without the written permission of the Landscape Architects.
Do not scale from this drawing.
The Contractor is responsible for checking all dimensions on site and report any discrepancies, errors or omissions to the Landscape Architects immediately.
The Contractor shall ensure that all goods, materials and workmanship conform with current British Agreement Certificates, British Standards and Building Regulations, and ensure that all works are in full compliance with all current Codes of Practice and Regulations in respect of Health & Safety.

E	23-04-23	JP	Minor amendments to layout following design development	JP
D	27-11-23	MS	Status amended to planning	MT
C	02-10-23	JP	Minor amend to show connecting footpath	JP
B	07-09-23	JP	Additional seating, standard bins, F1 fencing and hammock added in line with client comments	JP
A	04-08-23	MS	Layout amendments	MT

Rev	Date	By	Description	Ckd
-----	------	----	-------------	-----

**ALLEN SCOTT
LANDSCAPE
ARCHITECTURE**

Drawing Status

For Planning

Project:

Mount Noddy Park

Drawing Title:

General Arrangement - South East

Client:

Mid Sussex District Council

Scale:

1: 250 @ A2

Job No.:

23-739

Date:

13.06.23

Drawing No.:

740-103

© Crown Copyright and database rights 2023 Ordnance Survey AC0000649970