
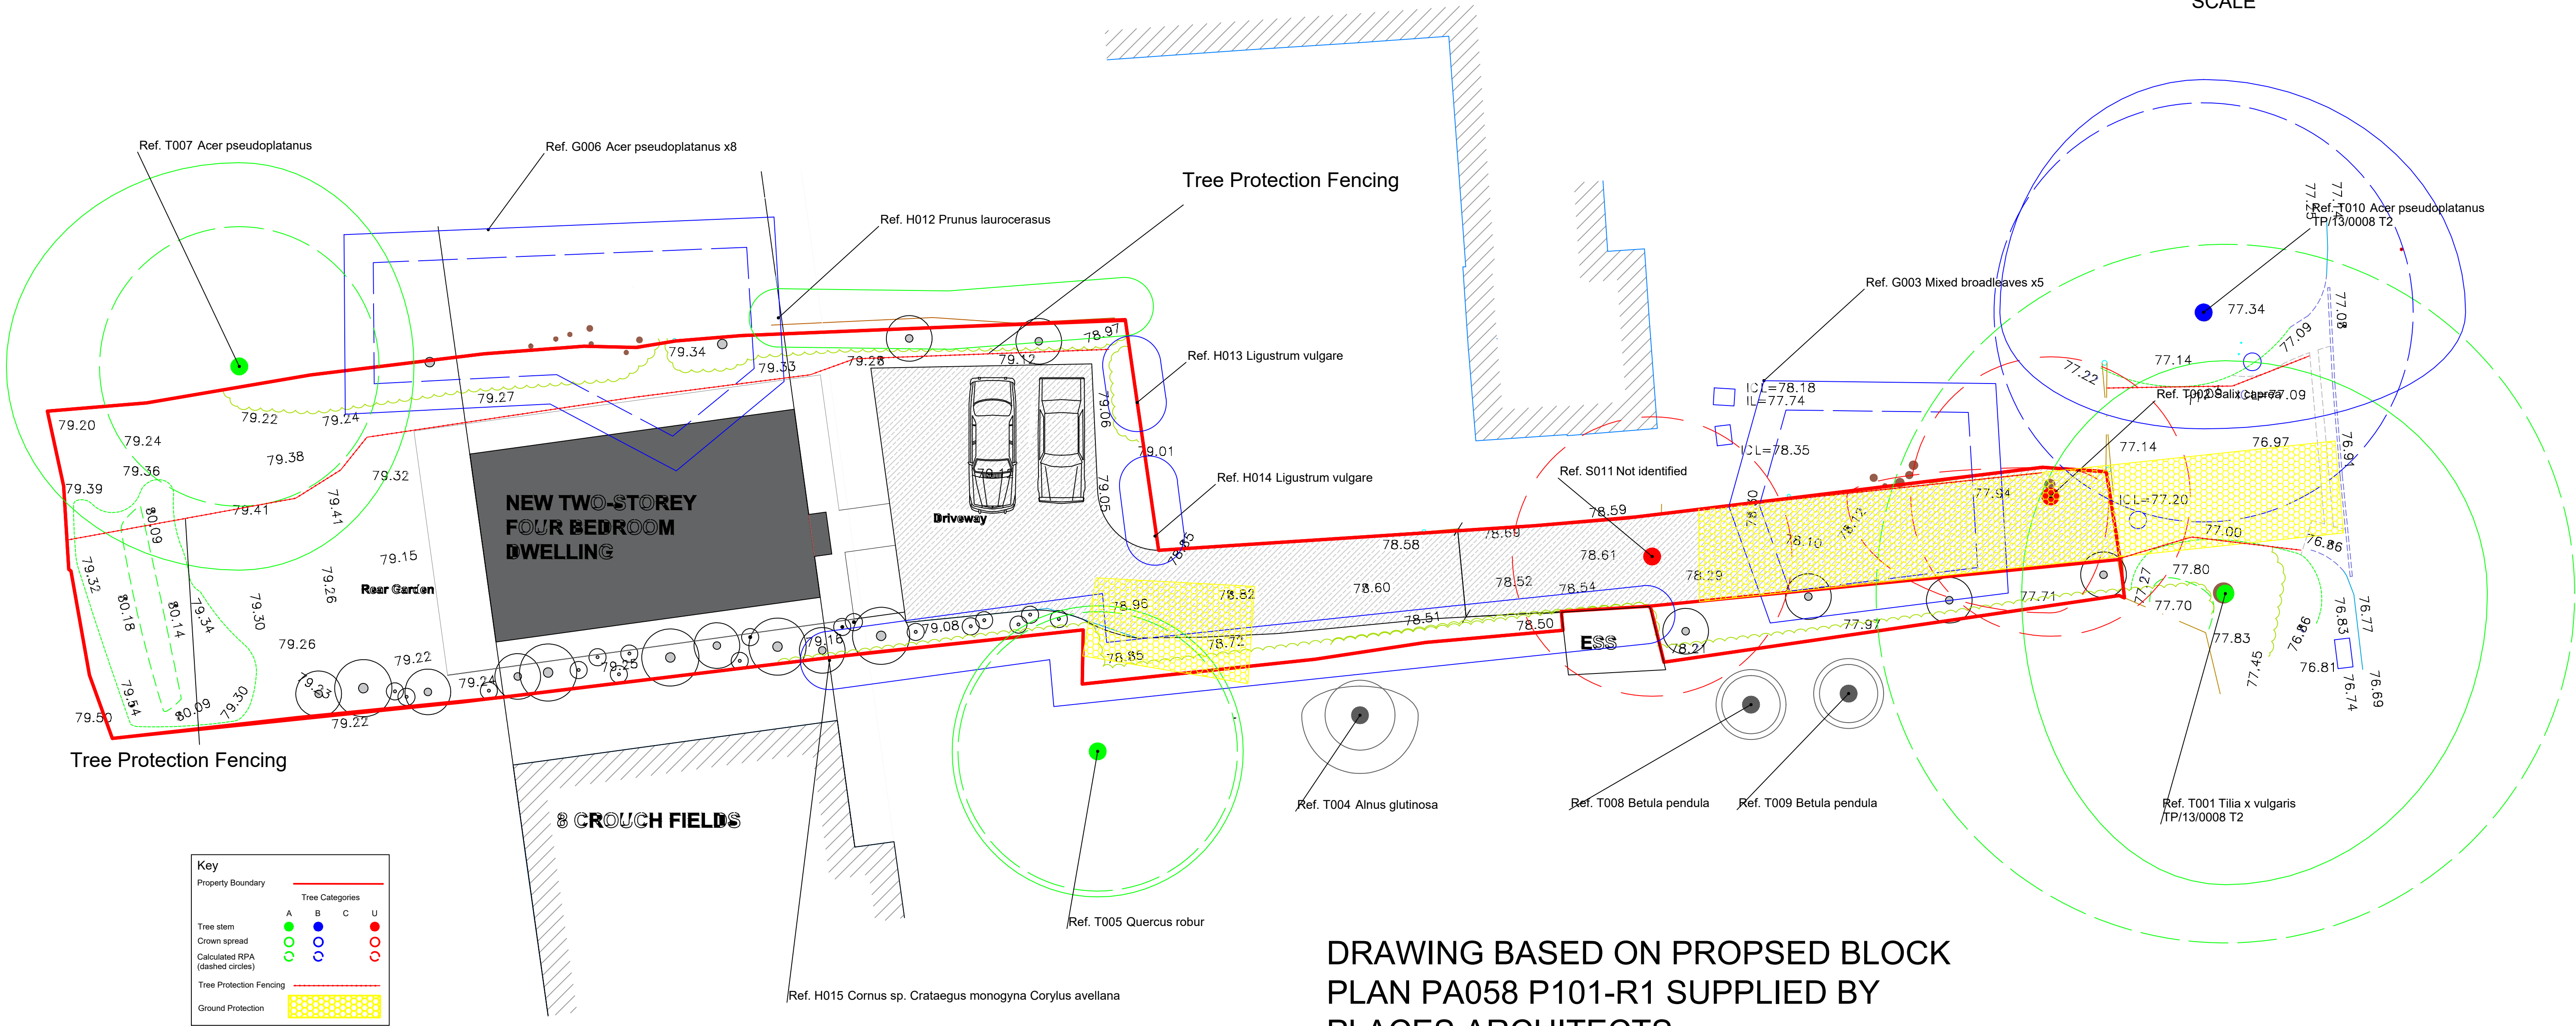


Plant Schedule

| Surveyed Trees |                     |        |               |                         |                 |        |              |                         |                      |                                                                                                                                                                                                     |                                      |
|----------------|---------------------|--------|---------------|-------------------------|-----------------|--------|--------------|-------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Reference      | Species             | Height | Stem Diameter | Canopy NESW             | Crown Clearance | Height | Age Class    | Physiological Condition | Structural Condition | Recommendations                                                                                                                                                                                     | Est. Remaining Contribution Category |
| S011           | Not identified      | 0.5m   | 400mm         | 0.1 N 0.1 E 0.1 S 0.1 W | 0.1m            |        | Mature       | Dead                    | Decaying             | Remove tree.                                                                                                                                                                                        | 0 Years<br>U                         |
| T001           | Tilia x vulgaris    | 19m    | 1000mm        | 8 N 9 E 10 S 7 W        | 1m              |        | Mature       | Good                    | Good                 | Pre construction: Remove basal growth and epicormic growth on main stem to 5m above ground level. Crown lift to 6m on driveway side During construction: Ground protection for construction traffic | 20 Years<br>A2                       |
| T002           | Salix caprea        | 17m    | 400mm         | 1 N 2 E 4 S 7 W         | 3m              |        | Semi-Mature  | Good                    | Good                 | Remove tree.                                                                                                                                                                                        | 30 Years<br>B2                       |
| T004           | Alnus glutinosa     | 10#m   | 100#mm        | 1# N 2# E 2# S 2# W     | 2#m             |        | Young        | Good                    | Good                 | None                                                                                                                                                                                                | 50 Years<br>C2                       |
| T005           | Quercus robur       | 10#m   | 400#mm        | 5# N 5# E 5# S 5# W     | 2#m             |        | Semi-Mature  | Good                    | Good                 | During construction: Ground protection for construction traffic                                                                                                                                     | 50 Years<br>A2                       |
| T007           | Acer pseudoplatanus | 14m    | 400#mm        | 7# N 6 E 7 S 8# W       | 3m              |        | Early-Mature | Good                    | Good                 | During construction: Protect trees with protective barriers - as shown on plans.                                                                                                                    | 50 Years<br>A2                       |
| T008           | Betula pendula      | 9m     | 100mm         | 1 N 1 E 1 S 1 W         | 1m              |        | Young        | Good                    | Good                 | None                                                                                                                                                                                                | 50 Years<br>C2                       |
| T009           | Betula pendula      | 7m     | 100mm         | 1 N 1 E 1 S 1 W         | 1m              |        | Young        | Good                    | Good                 | None                                                                                                                                                                                                | 50 Years<br>C2                       |
| T010           | Acer pseudoplatanus | 15m    | 600mm         | 8 N 9 E 4 S 7 W         | 4m              |        | Mature       | Fair                    | Fair                 | During construction: Ground protection for construction traffic Post construction: Crown reduce by 2 - 2.5m to reduce wind loading                                                                  | 20 Years<br>B2                       |

| Surveyed Tree Groups |                                                |        |               |             |                 |        |           |                         |                      |                                                               | Est. Remaining Contribution Category |    |
|----------------------|------------------------------------------------|--------|---------------|-------------|-----------------|--------|-----------|-------------------------|----------------------|---------------------------------------------------------------|--------------------------------------|----|
| Reference Species    |                                                | Height | Stem Diameter | Canopy NESW | Crown Clearance | Height | Age Class | Physiological Condition | Structural Condition | Recommendations                                               |                                      |    |
| G003                 | Mixed broadleaves x5                           |        |               |             |                 |        |           |                         |                      | Crown lift to 5.2m over driveway to facilitate access         |                                      | B2 |
| G006                 | Acer pseudoplatanus x8                         |        |               |             |                 |        |           |                         |                      | Reduce lateral branches in southern aspect of crown by 2 - 3m |                                      | B2 |
| H012                 | Prunus laurocerasus                            |        |               |             |                 |        |           |                         |                      | Protect with tree protection fencing                          |                                      | A2 |
| H013                 | Ligustrum vulgare                              |        |               |             |                 |        |           |                         |                      | None                                                          |                                      | B2 |
| H014                 | Ligustrum vulgare                              |        |               |             |                 |        |           |                         |                      | Remove for access                                             |                                      | B2 |
| H015                 | Cornus sp. Crataegus monogyna Corylus avellana |        |               |             |                 |        |           |                         |                      | None                                                          |                                      | B2 |

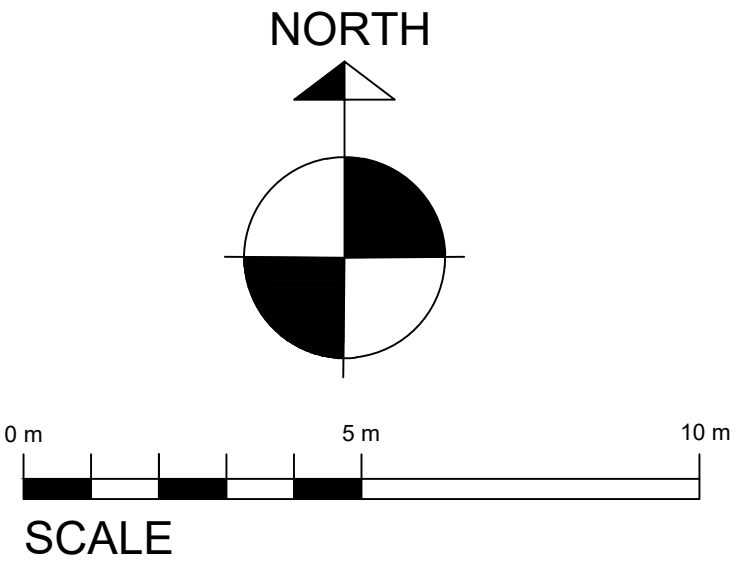

|  |                              |  |                                                |  |           |                                    |
|--|------------------------------|--|------------------------------------------------|--|-----------|------------------------------------|
|  | Project: Barn Cottage, Ansty |  | Date: october 25                               |  | Revisions |                                    |
|  | Drawing No.: TPP-2509-01     |  | Drawn By: PD                                   |  | Rev       | Note                               |
|  |                              |  | Client: Mr. Malcolm Avery<br>Places Architects |  | 1         | Additional Tree Protection Fencing |
|  |                              |  |                                                |  |           |                                    |
|  |                              |  |                                                |  |           |                                    |
|  |                              |  |                                                |  |           |                                    |