



Materials Schedule

Application: DM/25/2616 – Land at Hurstpierpoint College (Ruckford House)

Project: Four staff houses at Hurstpierpoint College (Ruckford House site, BN6 9JS)

Applicant: Hurstpierpoint College Limited


Author: Daniel Barker BA (Hons), MCIAT, C.Build E MCABE, MCIQB, MAPS

Date: 18/12/2025; **Revision:** A (15/06/2026)

This document is submitted to discharge Condition 4 (Materials) of planning permission DM/25/2616. The schedule below provides details of the external materials proposed for the development, including facing brickwork, mortar, roof tiles, hanging tiles, windows, doors and rainwater goods, together with supporting manufacturer information where applicable.

Facing Brick

Harrington Smooth Red (image below)

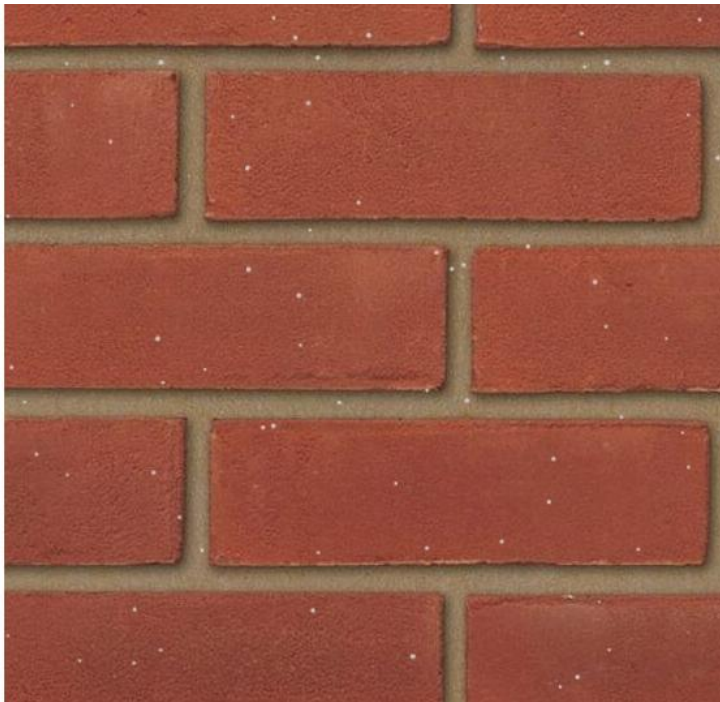

Harrington brick shown against Ruckford House to demonstrate match.



Mortar

Mortar for the proposed new build will be a lime-rich, low-strength heritage mortar (M2 equivalent), selected in a warm buff tone to visually match the adjacent historic brickwork. The mortar will be flush or very lightly recessed with a brushed finish.

Tile Hanging

Tudor Traditional Clay plain tile in Red (image below), to match Ruckford House



Roof Tiles

Tudor Traditional Clay plain tile in Jubilee (image below), to match Ruckford House



Please advise by return if physical material samples are required.

External Pipe Work

Only guttering and rainwater down pipes are proposed in terms of external pipework, as follows:

In accordance with Condition 4 of planning permission ref. DM/25/2616, details of the proposed rainwater goods are submitted for approval.

The development will incorporate a metal rainwater drainage system comprising aluminium gutters and aluminium downpipes. All components will be factory powder-coated in a black finish (RAL 9017) to provide a durable painted metal appearance consistent with the approved architectural design.

The use of powder-coated aluminium ensures a high quality and long-lasting finish, providing resistance to corrosion and weathering while maintaining a consistent colour and appearance over time. Aluminium has been selected as a robust and sustainable material suitable for residential buildings and external environments.

A manufacturer's product data sheet for the proposed aluminium guttering and downpipe system is attached for reference.

The rainwater goods will therefore be constructed from painted metal and finished in black, in accordance with the requirements of Condition 4 of the planning permission.



Gutter



Running Outlet



Down pipe

Windows

Painted Timber Flush Casement Windows;

Windows are to be factory-manufactured painted timber flush casement windows, formed from engineered finger-jointed pine / redwood timber, with side-hung opening casements as indicated on the window schedules and associated large-scale elevation drawings.

The window design, glazing pattern, mullion arrangement, transom arrangement, opening casements and solid timber glazing bars are to match the approved elevation drawings and the submitted site-specific window elevations and sections.

Window frames, opening casements, mullions, transoms and glazing bars are to be painted timber. Aluminium, aluminium-clad and UPVC windows are not proposed.

Windows are to be manufacturer-primed and finished with a high-quality external joinery paint system. The final external and internal window finish is to be **RAL 9001 Cream**, or equivalent heritage white / traditional off-white painted finish, satin sheen.

No externally visible trickle ventilators are to be fitted to the window frames, casements or heads. Background ventilation is to be coordinated separately through the Building Regulations ventilation strategy.

Glazing is to comprise 24mm argon-filled double-glazed units with Low-E coating, unless otherwise stated on the window schedule. Obscure satin glazing is to be provided to bathrooms, WCs and other privacy-sensitive rooms where indicated. South-facing windows are to include neutral appearance solar control glazing where indicated on the window schedule, avoiding a strong mirrored or heavily tinted appearance.

Safety glazing is to be provided in all critical locations in accordance with current Building Regulations, including low-level glazing, glazing in doors, glazing adjacent to doors and any other locations required by the Building Control Approver. Ground floor windows and any other windows within the scope of Approved Document Q are to be specified with an enhanced security glazing and hardware package suitable for compliance with Approved Document Q and PAS 24.

First-floor habitable room windows are to be provided with egress / easy-clean hinges where required for means of escape. Escape windows are to achieve the required clear openable area, clear width, clear height and cill height in accordance with the Building Regulations and the window schedule.

The submitted site-specific window elevations and sections identify the proposed flush timber casement arrangement, solid glazing bars, frame profiles, cill details and opening arrangement. The proposed windows are therefore confirmed as painted timber flush casement windows finished in **RAL 9001 Cream / heritage white**, with glazing and opening arrangements as shown on the submitted window schedules and detailed drawings.

Entrance Doors

Painted Timber External Entrance Doors;

Entrance doors are to be factory-manufactured painted timber external doors with painted timber frames, formed to match the design, panel arrangement and glazing arrangement shown on the approved elevation drawings and submitted door schedule.

Front entrance doors are to be manufacturer-primed painted timber glazed tongue and groove doors. Door leaves are to be finished in **RAL 3004 Purple Red**, satin painted finish. Door frames are to be finished in **RAL 9001 Cream**, satin painted finish, to coordinate with the painted timber window joinery.

Rear doors are to be painted timber glazed external doors as indicated on the door schedule. Glazed panels are to comprise insulated double-glazed units, with safety glazing provided where required by the Building Regulations.

GRP composite, aluminium and UPVC external doors are not proposed.

External doors are to incorporate suitable weather seals, draught seals, thresholds, ironmongery and locking systems appropriate for external residential use. Principal entrance doors are to provide a minimum clear opening width of **775mm**, and level thresholds are to be coordinated with external landings, DPCs and threshold drainage.

Entrance doors and any other doors within the scope of Approved Document Q are to be specified to meet Approved Document Q and PAS 24 requirements, including secure locking, compatible glazing, door viewer / spy hole, door chain or limiter where required, and letter plate provisions designed to reduce the risk of manipulation or removal of keys through the opening. The Building Control plan check specifically identifies the need to confirm ADQ / PAS 24 compliance for proposed doors and windows, together with letter box provisions.

The submitted site-specific door elevations and sections identify the proposed painted timber door construction, frame arrangement, glazing arrangement, threshold detail and finish. The proposed external doors are therefore confirmed as painted timber

doors and frames, with front door leaves finished in **RAL 3004 Purple Red** and frames finished in **RAL 9001 Cream**, as shown on the submitted door schedules and detailed drawings.

Schedule of Drawings and Supporting Documentation

Architectural Drawings

719-AL202A – Proposed Elevations (Plots 3 & 4)

Drawing illustrating the proposed external elevations of Plots 3 and 4, including materials, roof form, window arrangement and external appearance.

719-AL205A – Proposed Elevations (Plots 1 & 2)

Drawing illustrating the proposed external elevations of Plots 1 and 2, including external wall finishes, window openings, doors and roof materials.

Architectural Construction Details

719-AD411 – Wall Construction Details (W2)

Detailed section illustrating the timber frame external wall construction, including insulation build-up, brick outer leaf, clay tile hanging and cavity construction, achieving a target U-value of approximately 0.15 W/m²K.

719-AD412 – Wall Construction Details (W3, W4 & W5)

Detailed drawings illustrating typical window head, jamb and cill construction within the timber frame wall, including cavity trays, fire-resisting cavity barriers, breather membranes and airtightness detailing.

719-AD426 to 429 – Window and Doors Schedules include construction details

719-AD420 – Roof Construction Details (R1)

Detailed section illustrating the proposed roof build-up including insulation, breather membrane, battens and clay tile roof covering.

719-AD422 – Roof Construction Details (R2 & R3)

Typical roof construction details including eaves build-up, ventilation and insulation arrangement.

719-AD423 – Roof Construction Details (R4 & R5)

Typical roof junction details including verge and roof edge construction.

719-AD424 – Roof Construction Details (R6 & R7)

Typical roof detailing illustrating junctions between roof elements and wall construction.

719-AD425A – Roof Construction Details (R8 & R9)

Additional roof construction details showing typical ridge and roof junction construction.

Supporting Product Information**Aluflow Rainwater System – Technical Guide**

Manufacturer's technical information relating to the aluminium rainwater goods proposed for the development.