


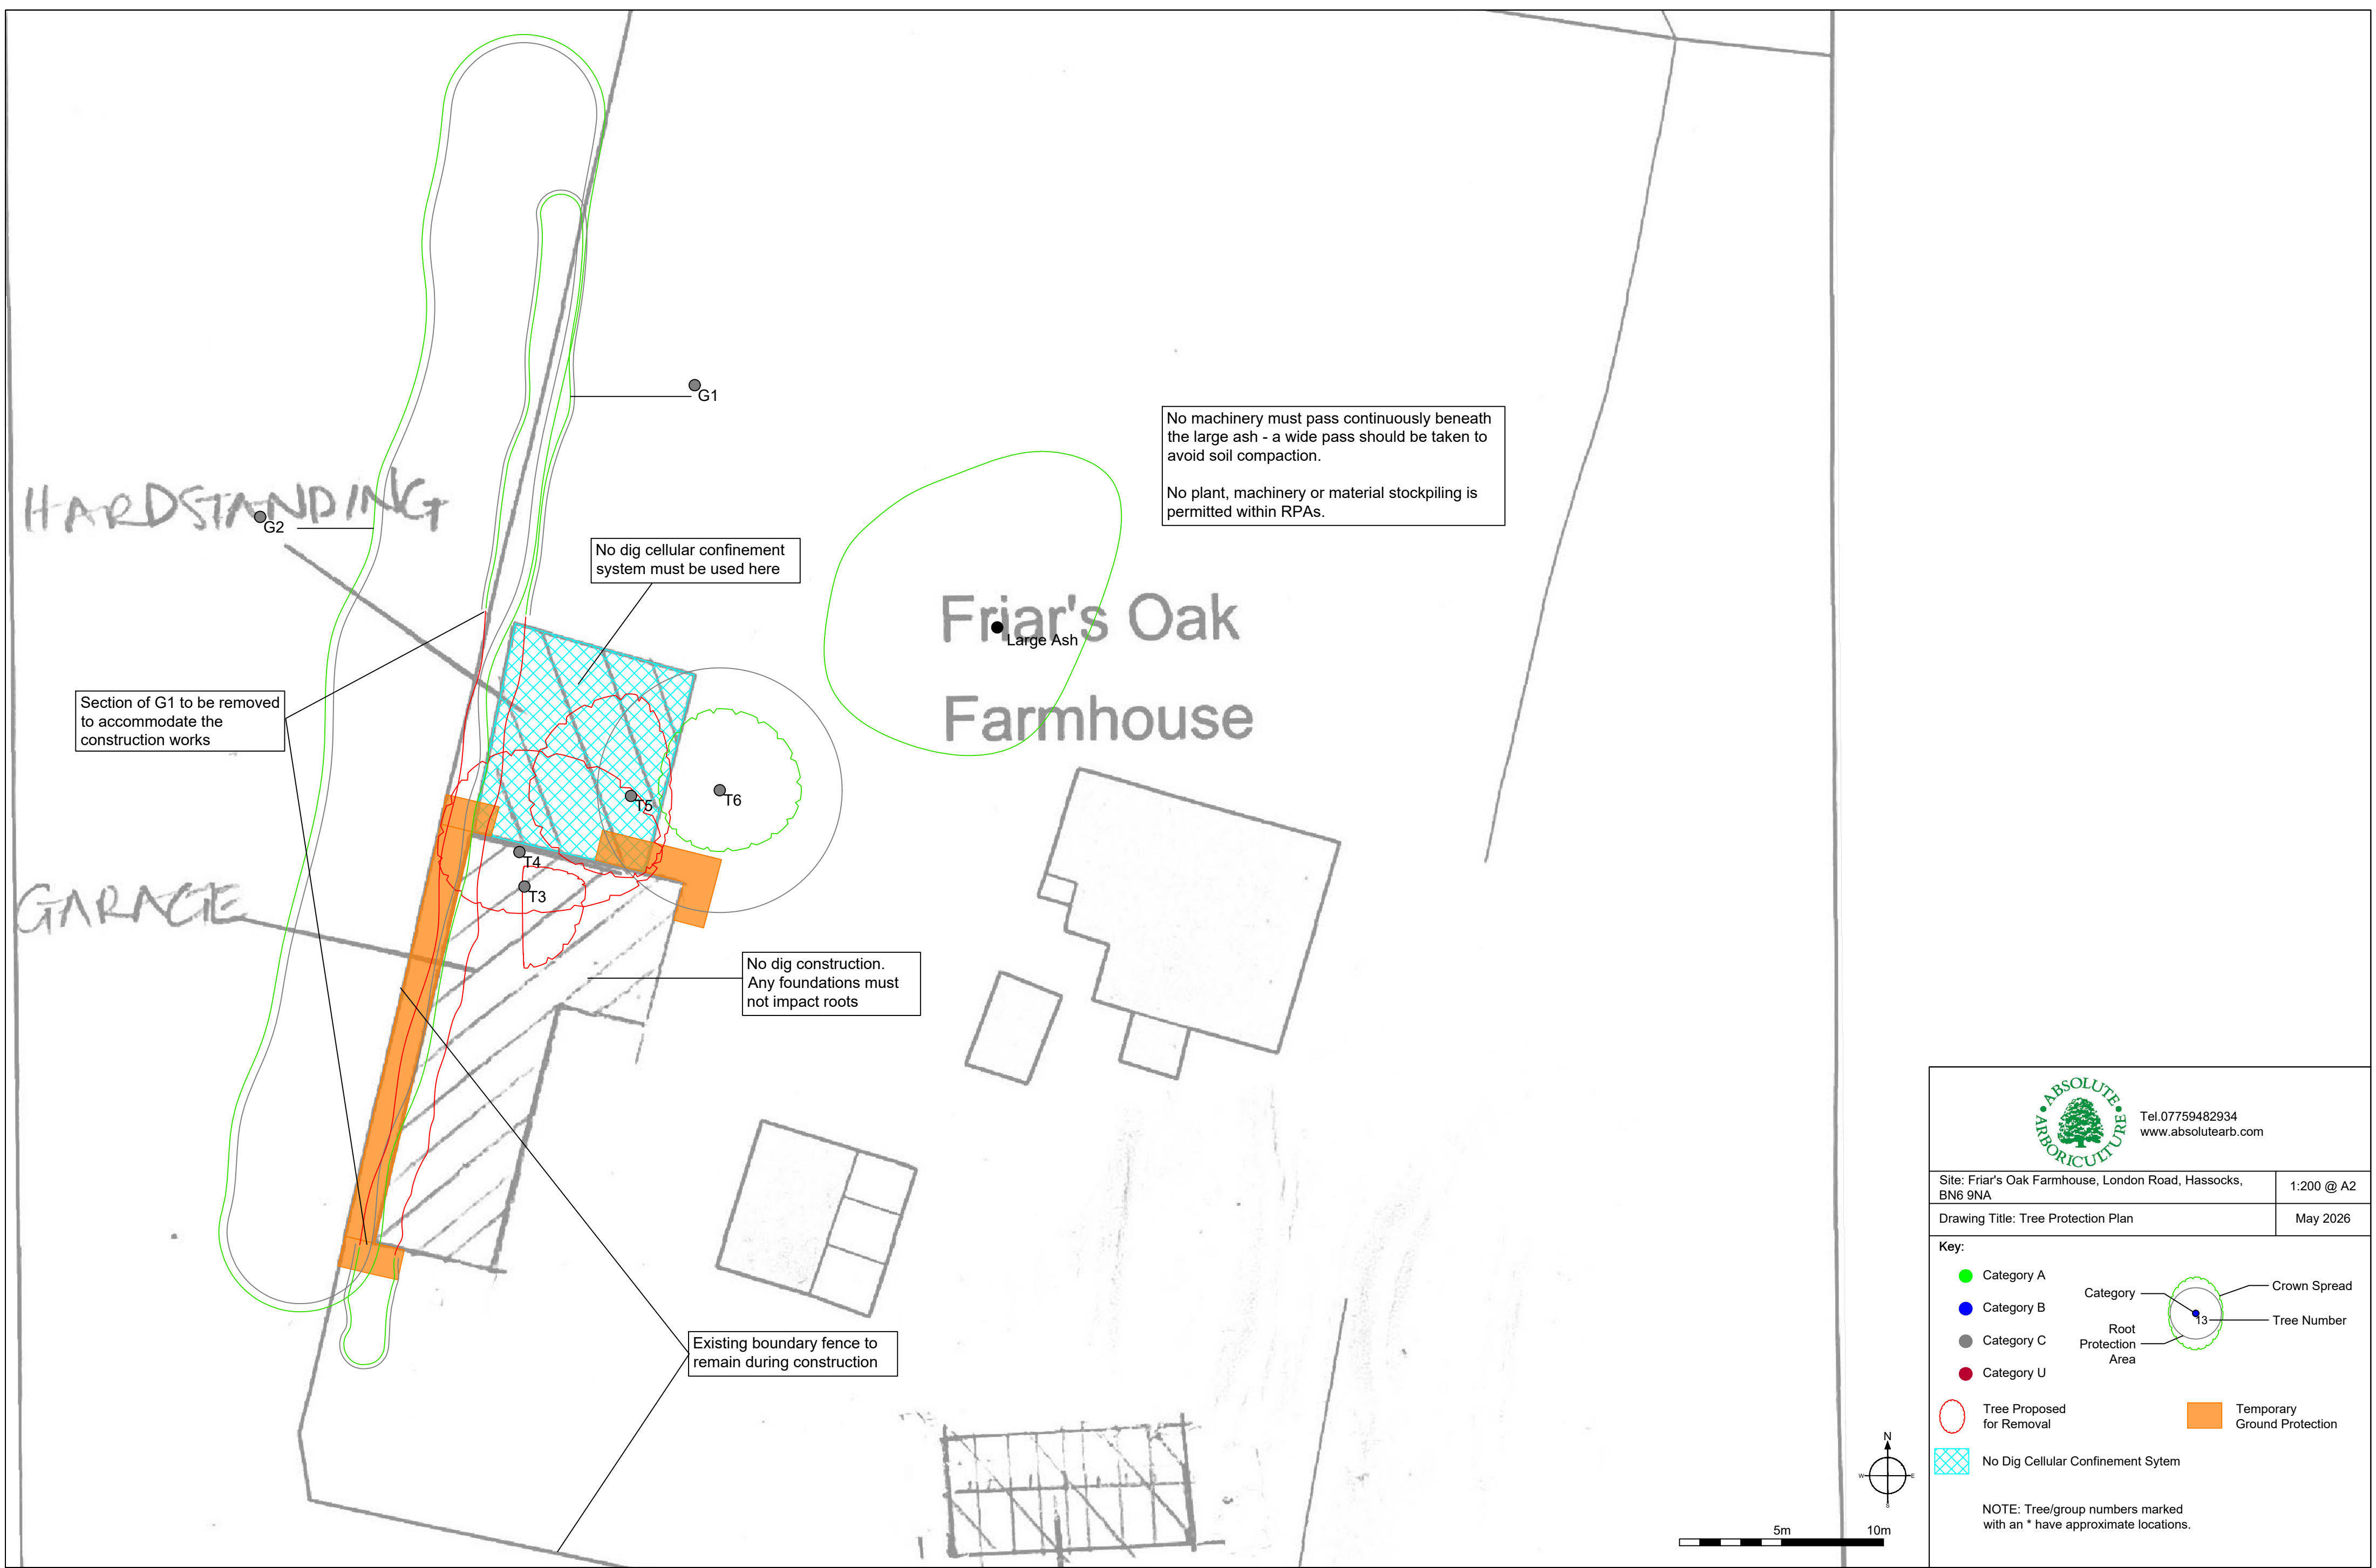

No machinery must pass continuously beneath the large ash - a wide pass should be taken to avoid soil compaction.

No plant, machinery or material stockpiling is permitted within RPAs.

No dig cellular confinement system must be used here

Section of G1 to be removed to accommodate the construction works

No dig construction. Any foundations must not impact roots

Existing boundary fence to remain during construction



Tel.07759482934
www.absolutearb.com

Site: Friar's Oak Farmhouse, London Road, Hassocks, BN6 9NA	1:200 @ A2
Drawing Title: Tree Protection Plan	May 2026

Key:

● Category A

● Category B

● Category C

● Category U

○ Tree Proposed for Removal

■ No Dig Cellular Confinement Sytem

Category

Root Protection Area

Tree Number

13

Crown Spread

Temporary Ground Protection

NOTE: Tree/group numbers marked with an * have approximate locations.