

Barrow Burnt Oak



Sandtoft

A handcrafted, cross cambered clay plain tile with a lightly sanded finish.

Minimum Roof Pitch (Roof):

35°

Headlap:

65mm

Covering Capacity:

60 tiles per m2

Minimum Roof Pitch (Vertical):

75°

Headlap:

38mm

Covering Capacity:

53 tiles per m2

Technical Data

Maximum Weight Per Sqm	60 kg
Quantity Per Pallet	530

Additional Information

Length x Width	265 x 165 mm
Cover Width	165 mm
Hanging Length	245 mm
Profile Depth	13 mm
Minimal Batten Gauge	100 mm
Maximum Batten Gauge	100 mm


Accessories



Ibstock
At the heart of building

< Brick Selector


Ashdown
Ashdown Medium Multi
A4057A

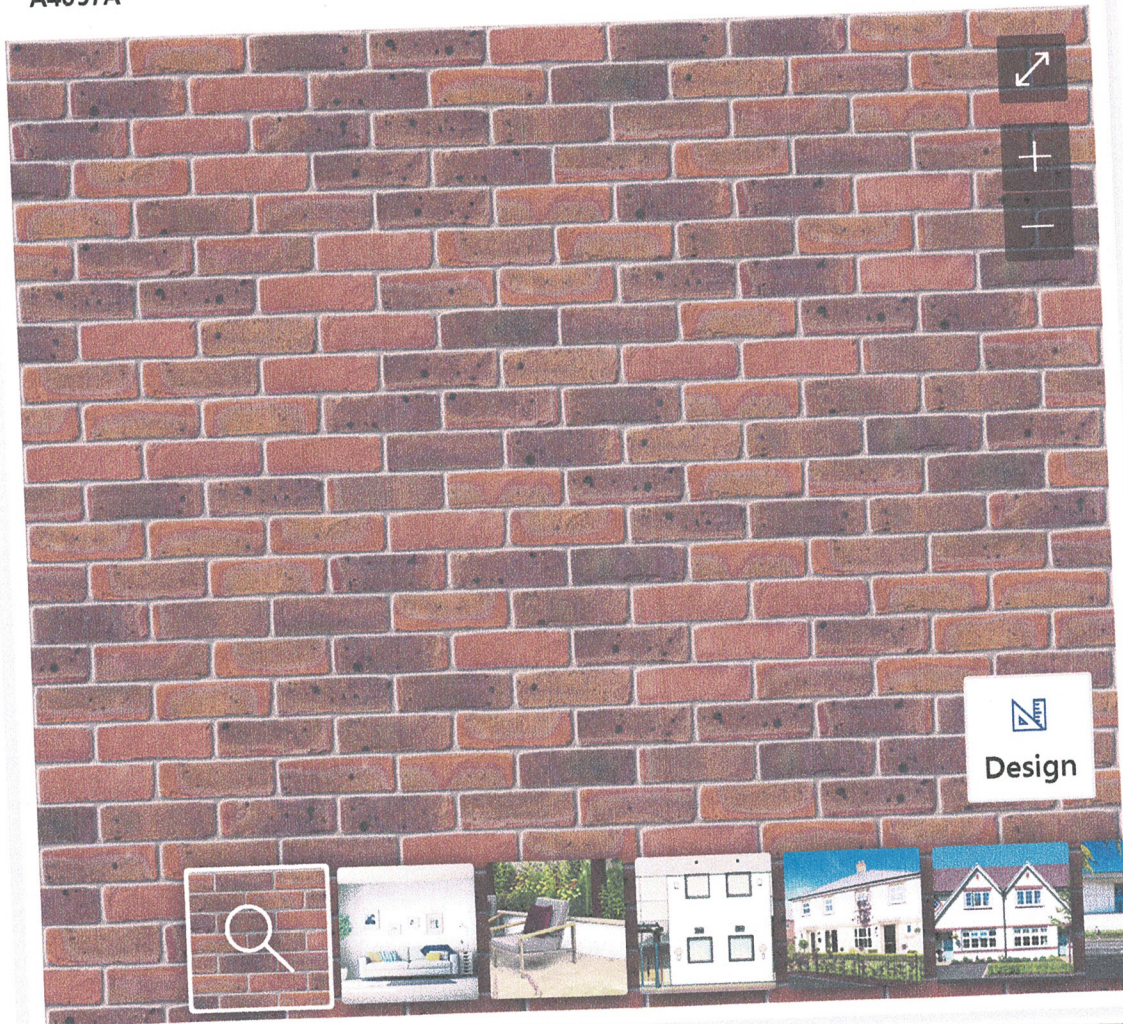

[Request Sample](#)

[Contact Sales Team](#)

[Resources & Downloads](#)

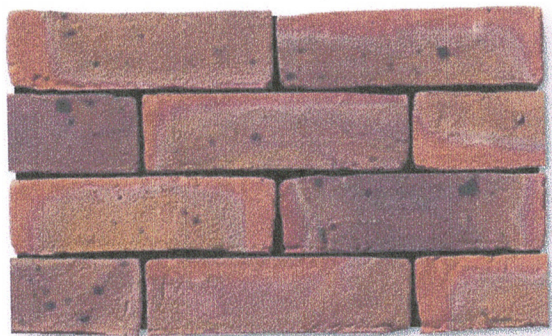

Product Information

Ibstock Code:	A4057A
Type:	Stock
Facing Description:	Sandfaced
Dry Brick Weight (kg):	2.2kg
Pack Quantity:	500
Packaging (standard):	Banded (Plastic)
Factory:	Ashdown
EPD:	

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T1 R1
Configuration:	Single Frog
Voids (%):	6-11%
Compressive Strength (N/mm²):	30
Active Soluble Salts:	S2
Water Absorption (% weight):	15
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m³):	1610
Equivalent Thermal Conductivity "K" value 5% Exposed:	0.86
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	0.7
EAN:	n/a



Brett Martin Prostyle 106mm Cascade Cast Iron Effect Gutter Clip (BR080CI)

£1.17 GBP* · **In stock** · Brand: Brett Martin

Delivery:, Current Delivery: 5 days, Key Features:, Product Code: BR080CI, Fitting Type: Gutter Clip (fo

* Check website for latest pricing and availability. Images may be subject to copyright. [Learn More](#)

 Share

 Save