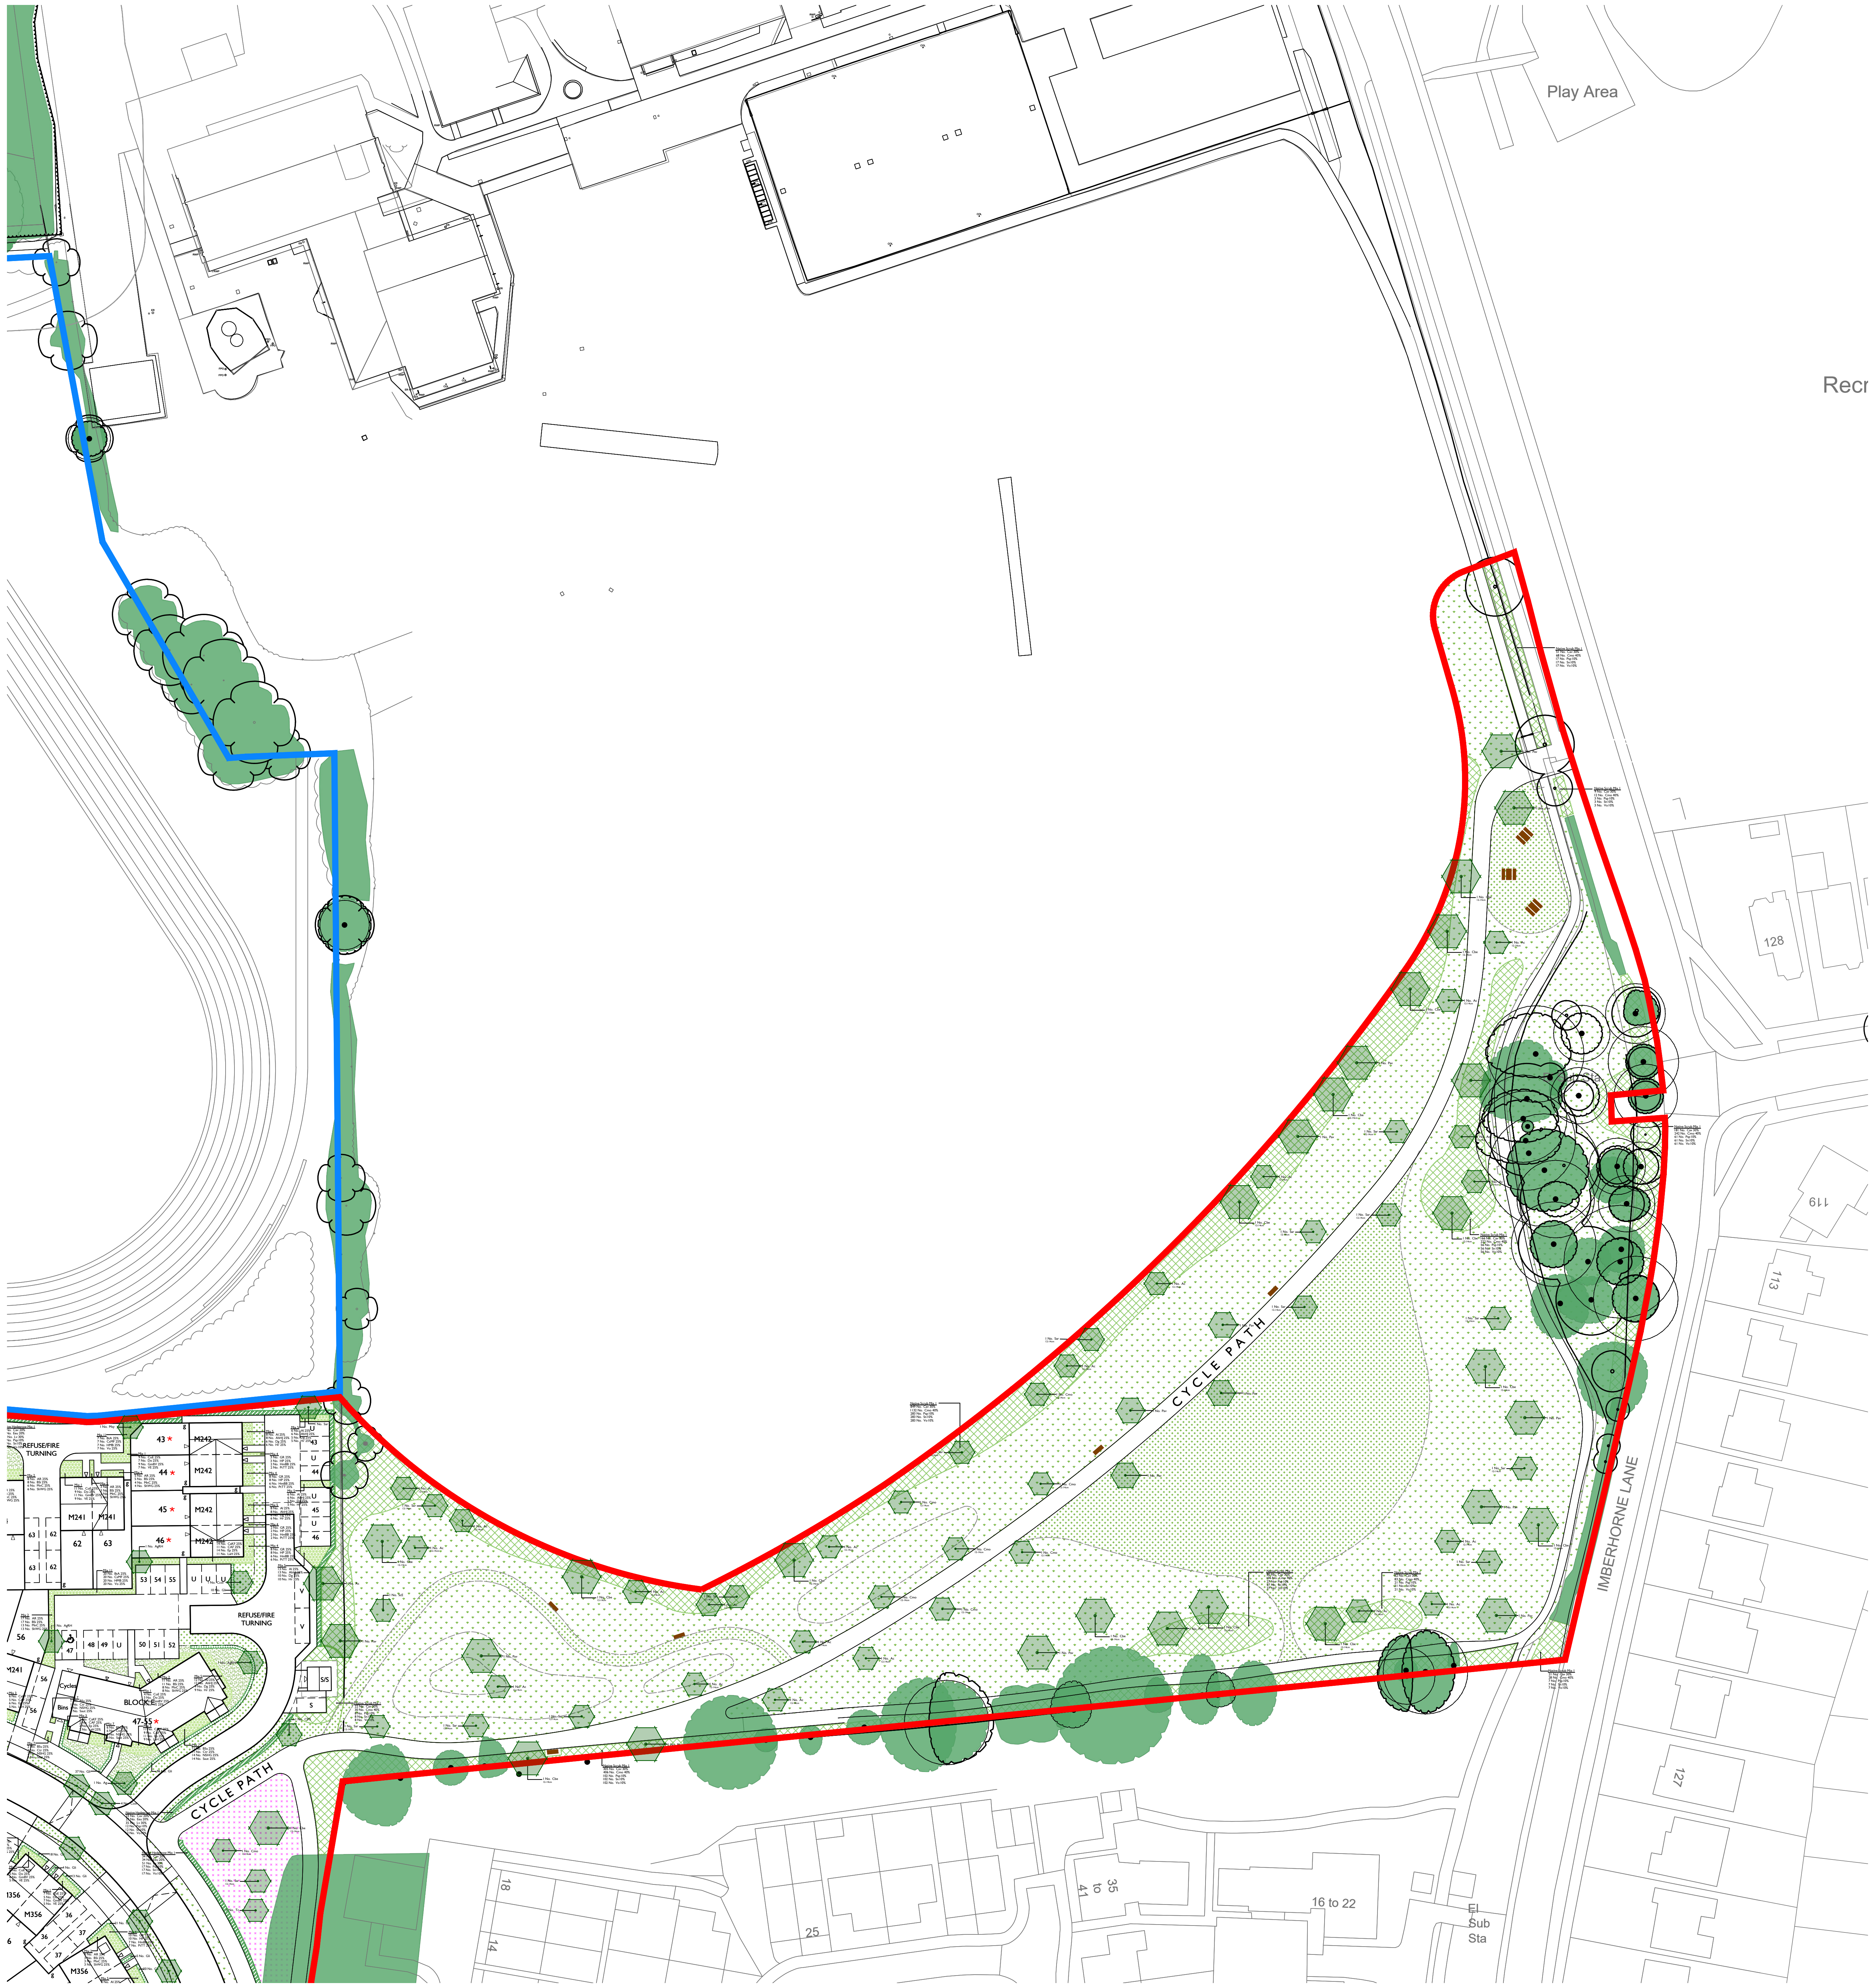

Plant schedule

Trees

Number	Abbreviation	Species	Height	Girth	Specification
96	Ac	Acer campestre	350-425cm	12-14cm	Heavy Standard :RB
7	Ac	Acer campestre	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
9	Ac	Acer campestre	175-200cm		Feather :RB
15	Ag	Acer griseum	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
6	Aco	Alnus cordata	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
16	Agl	Alnus glutinosa	350-425cm	12-14cm	Heavy Standard :Clear Stem min. 200 :RB
29	AgRH	Amelanchier x grandiflora 'Robin Hill'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
25	Bpu	Betula pubescens	350-425cm	12-14cm	Heavy Standard :RB
9	Bpu	Betula pubescens	175-200cm		Feather :RB
52	Cbe	Carpinus betulus	350-425cm	12-14cm	Heavy Standard :RB
28	Cbe	Carpinus betulus	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
6	Cbe	Carpinus betulus	175-200cm		Feather :RB
11	Cav	Corylus avellana	175-200cm		Multi-Stemmed :RB
103	Ccol	Corylus colurna	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
1	ClPS	Crataegus laevigata 'Paul's Scarlet'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
86	Cmo	Crataegus monogyna	350-425cm	12-14cm	Heavy Standard :RB
14	Cmo	Crataegus monogyna	175-200cm		Feather :RB
4	Ia	Ilex aquifolium	150-175cm		Feather :RB
2	LsW	Liquidambar styraciflua 'Worplesdon'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
99	Mk	Magnolia kobus	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
13	Msy	Malus sylvestris	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
49	Pav	Prunus avium	350-425cm	12-14cm	Heavy Standard :Clear Stem min. 200 :RB
12	Pce	Prunus cerasifera	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
26	Qr	Quercus robur	175-200cm	6-8cm	Light Standard :RB
52	Sar	Sorbus aria	300-350cm	12-14cm	Heavy Standard :Clear Stem 175-200 :RB
6	Sar	Sorbus aria	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
50	Sa	Sorbus aucuparia	350-425cm	12-14cm	Heavy Standard :RB
18	Sa	Sorbus aucuparia	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
2	ScE	Sorbus commixta 'Embley'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
5	ShPP	Sorbus hupehensis 'Pink Pagoda'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
17	Tc	Tilia cordata	350-425cm	12-14cm	Heavy Standard :RB
20	TtB	Tilia tomentosa 'Brabant'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
13	UNH	Ulmus 'New Horizon'	300-350cm	12-14cm	Heavy Standard :Clear Stem 175-200 :RB
Total :901					

Marginal / Aquatics

Number	Abbreviation	Species	Specification	Pot Size	Density
1395	Pau	Phragmites australis	Plug: Well Rooted		2/m²
Total :1395					

Native Scrub Mix 1

Number	Abbreviation	Species	Specification	Density	Height	Percentage Contribution
12836	Cav	Corylus avellana	Bushy :BR	2/m²	60-80cm	30%
17104	Cmo	Crataegus monogyna	Transplant :Bushy :BR	2/m²	60-80cm	40%
4297	Psp	Prunus spinosa	Bushy :BR	2/m²	60-80cm	10%
4297	Sn	Sambucus nigra	Bushy :BR	2/m²	80-100cm	10%
4297	Vo	Viburnum opulus	Bushy :BR	2/m²	60-80cm	10%
Total :42831						

Native Hedgerow Mix 1

Number	Abbreviation	Species	Specification	Density	Height	Percentage Contribution
1045	Cav	Corylus avellana	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	20%
1045	Eeu	Euonymus europaeus	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	20%
1564	Lv	Ligustrum vulgare	Bushy: BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	30%
528	Psp	Prunus spinosa	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	10%
528	Sn	Sambucus nigra	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	80-100cm	10%
528	Vo	Viburnum opulus	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	10%
Total :5238						

Native hedgerow mix 2

Number	Abbreviation	Species	Specification	Density	Height	Percentage Contribution
365	Ac	Acer campestre	Transplant :Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	10%
365	Agl	Alnus glutinosa	Transplant :Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	10%
365	Cav	Corylus avellana	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	10%
1800	Cmo	Crataegus monogyna	Transplant :Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	50%
365	Psp	Prunus spinosa	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	60-80cm	10%
365	Rca	Rosa canina	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	40-60cm	10%
Total :3625						

Single species hedgerow planting

Number of Plants	Abbreviation	Species	Specification	Height	Pot Size	Density
2549	Lo	Ligustrum ovalifolium	Bushy :C	60-80cm	5L	0.5Ctr
3289	Gli	Griselinia littoralis	Bushy :C	60-80cm	5L	0.5Ctr
1402	Ob	Osmanthus burkwoodii	Bushy :C	60-80cm	5L	0.5Ctr
188	EAB	Escallonia 'Apple Blossom'	Bushy :C	60-80cm	5L	0.5Ctr
Total :7428						

Mix 1

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
710	CoE	Carex oshimensis 'Evergold'	Full Pot	4/m²		5L	25%
556	Do	Daphne odora	Bushy :C	3/m²	30-40cm	5L	25%
710	GmBV	Geranium macrorrhizum 'Bevan's Variety'	Full Pot	4/m²		5L	25%
556	VE	Viburnum 'Eskimo'	Bushy :C	3/m²	30-40cm	5L	25%
Total :2532							

Mix 2

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
855	AR	Astrantia 'Roma'	Full Pot	4/m²		5L	25%
855	BSi	Bergenia 'Silberlicht'	Full Pot	4/m²		5L	25%
657	MnC	Mahonia nitens 'Cabaret'	Bushy :C	3/m²	30-40cm	5L	25%
657	ShWG	Sarcococca hookeriana 'Winter Gem'	Bushy :C	3/m²	30-40cm	5L	25%
Total :3024							

Mix 3

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
2990	CaKF	Calamagrostis x acutiflora 'Karl Foerster'	Full Pot	4/m²		5L	25%
2256	CAF	Cistus purpureus 'Alan Fradd'	Bushy :C	3/m²	30-40cm	5L	25%
2990	Ep	Echinacea purpurea	Full Pot	4/m²		5L	25%
2256	LaH	Lavandula angustifolia 'Hidcote'	Bushy :C	3/m²	30-40cm	5L	25%
Total :10492							

Mix 4

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
1111	GR	Geranium Rozanne	Full Pot	4/m²		5L	25%
1111	HP	Heuchera 'Paris'	Full Pot	4/m²		5L	25%
858	HmBB	Hydrangea macrophylla 'Blue Bird'	Bushy :C	3/m²	30-40cm	5L	25%
858	PtTT	Pittosporum tenuifolium 'Tom Thumb'	Bushy :C	3/m²	30-40cm	5L	25%
Total :3938							

Mix 5

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
1136	Al	Anemanthele lessoniana	Full Pot	4/m²		5L	25%
1136	AhHJ	Anemone x hybrida 'Honorine Jobert'	Full Pot	4/m²		5L	25%
877	Dg	Deutzia gracilis	Bushy :C	3/m²	30-40cm	5L	25%
877	Hr	Hebe rakaiensis	Bushy :C	3/m²	30-40cm	5L	25%
Total :4026							

Mix 6

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
240	CID	Carex 'Ice Dance'	Full Pot	4/m²		5L	25%
240	GeWP	Geranium endressii 'Wargrave Pink'	Full Pot	4/m²		5L	25%
184	Shh	Sarcococca hookeriana humilis	Bushy :C	3/m²	30-40cm	5L	25%
184	ScKG	Skimmia confusa 'Kew Green'	Bushy :C	3/m²	30-40cm	5L	25%
Total :848							

Mix 7

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
749	BSu	Brachyglottis 'Sunshine'	Bushy :C	3/m²	30-40cm	5L	25%
749	Ctr	Ceanothus thyrsiflorus repens	Bushy :C	3/m²	30-40cm	5L	25%
979	NSHG	Nepeta 'Six Hills Giant'	Full Pot	4/m²		5L	25%
979	Saut	Sesleria autumnalis	Full Pot	4/m²		5L	25%
Total :3456							

Mix 8

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
667	AcM	Achillea 'Moonshine'	Full Pot	4/m²		5L	25%
667	CaKF	Calamagrostis x acutiflora 'Karl Foerster'	Full Pot	4/m²		5L	25%
667	LaH	Lavandula angustifolia 'Hidcote'	Bushy :C	4/m²	30-40cm	5L	25%
516	SjAW	Spiraea japonica 'Anthony Waterer'	Bushy :C	3/m²	30-40cm	5L	25%
Total :2517							

Mix 9

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
730	Al	Anemanthele lessoniana	Full Pot	4/m²		5L	25%
570	HMW	Hebe 'Mrs Winder'	Bushy :C	3/m²	30-40cm	5L	25%
570	HmV	Hydrangea macrophylla 'Veitchii'	Bushy :C	3/m²	30-40cm	5L	25%
730	SAJ	Sedum 'Autumn Joy'	Full Pot	4/m²		5L	25%
Total :2600							

Mix 10

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
691	Amo	Alchemilla mollis	Full Pot	4/m²		5L	25%
530	CWD	Choisya 'White Dazzler'	Bushy :C	3/m²	30-40cm	5L	25%
530	FMP	Fuchsia 'Mrs Popple'	Bushy :C	3/m²	30-40cm	5L	25%
691	Hr	Hebe rakaiensis	Bushy :C	4/m²	30-40cm	5L	25%
Total :2442							

Mix 11

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
1178	BtA	Berberis thunbergii 'Atropurpurea'	Bushy :C	3/m²	30-40cm	5L	25%
1178	CsMF	Cornus sanguinea 'Midwinter Fire'	Bushy :C	3/m²	30-40cm	5L	25%
1178	HMB	Hebe 'Midsummer Beauty'	Bushy :C	3/m²	30-40cm	5L	25%
1178	Vo	Viburnum opulus	Bushy :C	3/m²	30-40cm	5L	25%
Total :4712							

LEGEND

🟥	Site boundary
●	Existing tree to be retained and protected. Refer to arboricultural information for further detail
🟩	Existing vegetation and/or hedgerow to be retained and protected. Refer to arboricultural information for further detail
▨	Existing grassland to be retained and protected. Where disturbed to be seeded in line with proposed grassland seed mix as specified.

Proposed soft landscaping

⬡	Tree planting, refer to detail GLS_080_127_1700
▭	Ornamental hedge - Single row 0.9m high
▨	Double staggered mixed native hedgerow To be planted in groups of 7-9no. of each species
▨	Ornamental shrub planting
▨	Native scrub planting mix To be planted in groups of 7-9no. of each species
▨	Good quality hardwearing lawn
+	Mown species rich grassland Verges laid with species rich turf from Wildflower Turf or similar, remaining areas seeded with EL1 Flowering Lawn Mixture from Emorsgate or similar seeded at 4g/m2
×	Wildflower meadow EM4 Meadow Mixture for Clay Soils from Emorsgate or similar seeded at 4g/m2
▨	Wetland meadow EM8 Meadow Mixture for Wetlands from Emorsgate or similar seeded at 4g/m2
↓	Species rich neutral grassland Verges laid with species rich turf from Wildflower Turf or similar, remaining areas seeded with EL1 Flowering Lawn Mixture from Emorsgate or similar seeded at 4g/m2

NOTES:
1. For Planting Schedule refer to drawing GLS_080_127_1517

To be read in conjunction with:
- Landscape general arrangement plan GLS_080_127_1300
- Detailed hard landscape plans GLS_080_127_1600-series
- Tree planting construction detil GLS_080_127_1700
- Landscape specification GLS_080_127_1801
- Landscape management plan GLS_080_127_1802

SHEET LAYOUT

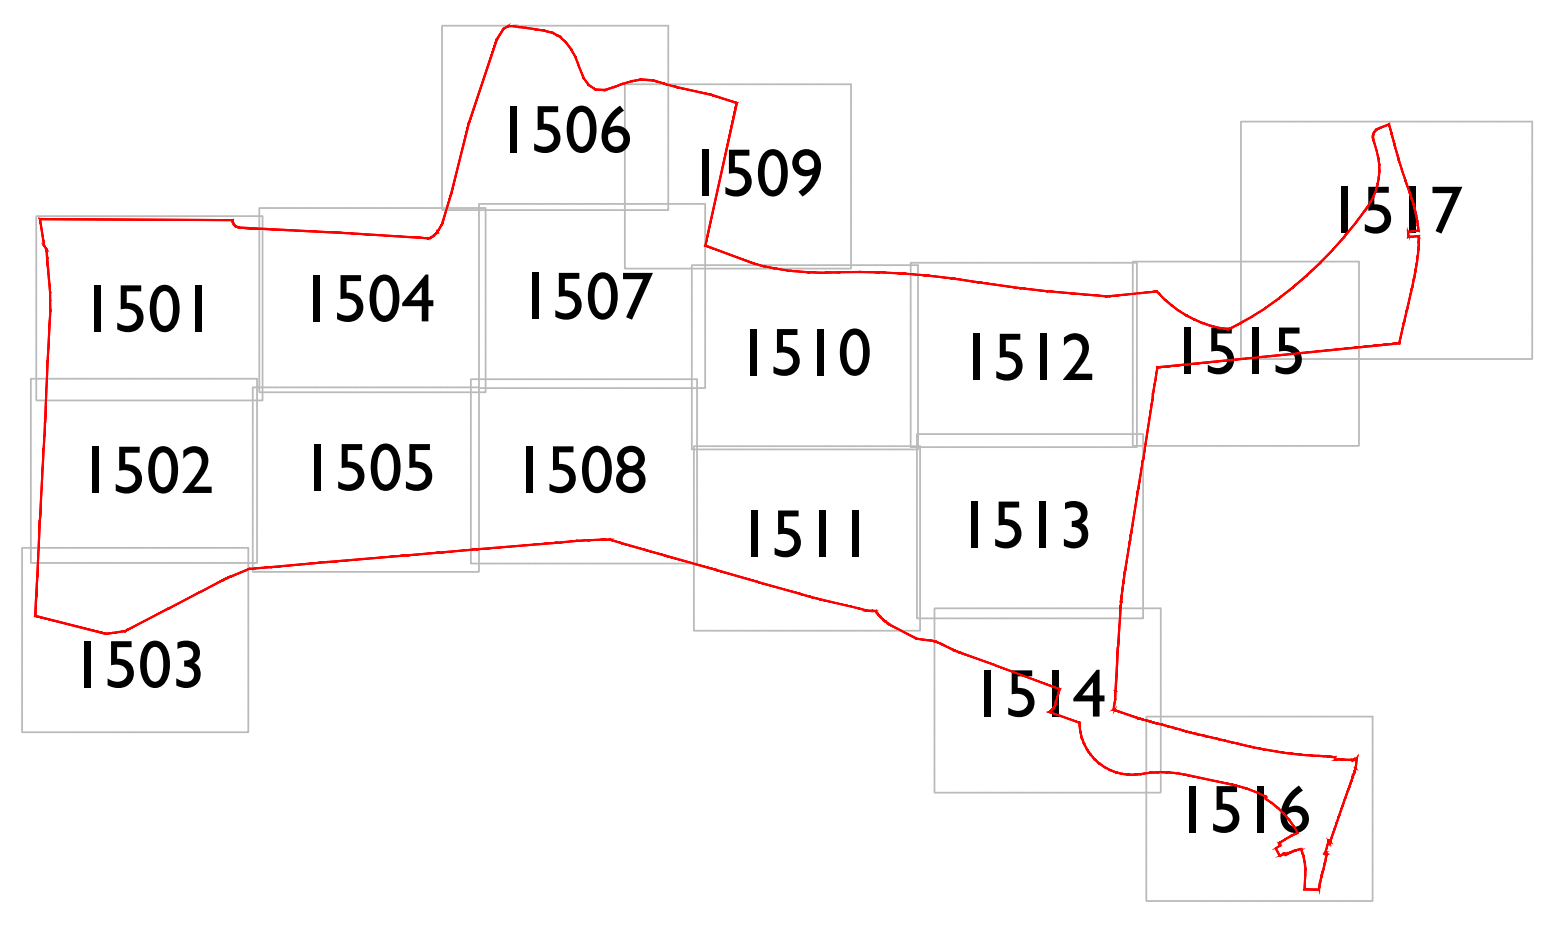

FOR PLANNING

Scale @ A0:

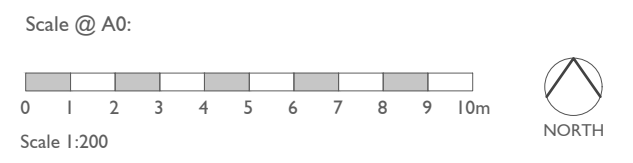

Scale 1:200

Rev	Date	Drawn	Checked
C	05.05.26	LM	AE
Updated in line with revised layout			
D	18.05.26	LM	AE
Updated in line with revised layout			

Date: 11.12.25

Drawn by : LM
Checked by : AE

Drg No: GLS_080_127_1517
Rev: D

Project:
Land West of Imberhorne Lane
East Grinstead

Title:
Planting Plan
Sheet 17

Client:
Vistry Homes
DAVID WILSON HOMES

GREENLANDSCAPE
STUDIO

Green Landscape Studio Limited - The Lakeside Centre, Lakeside Country Park, Wide Lane, Eastleigh, Hampshire - Telephone 01276 450039 - www.gl-studio.co.uk
This drawing and the works depicted are the copyright of Green Landscape Studio Ltd. and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.