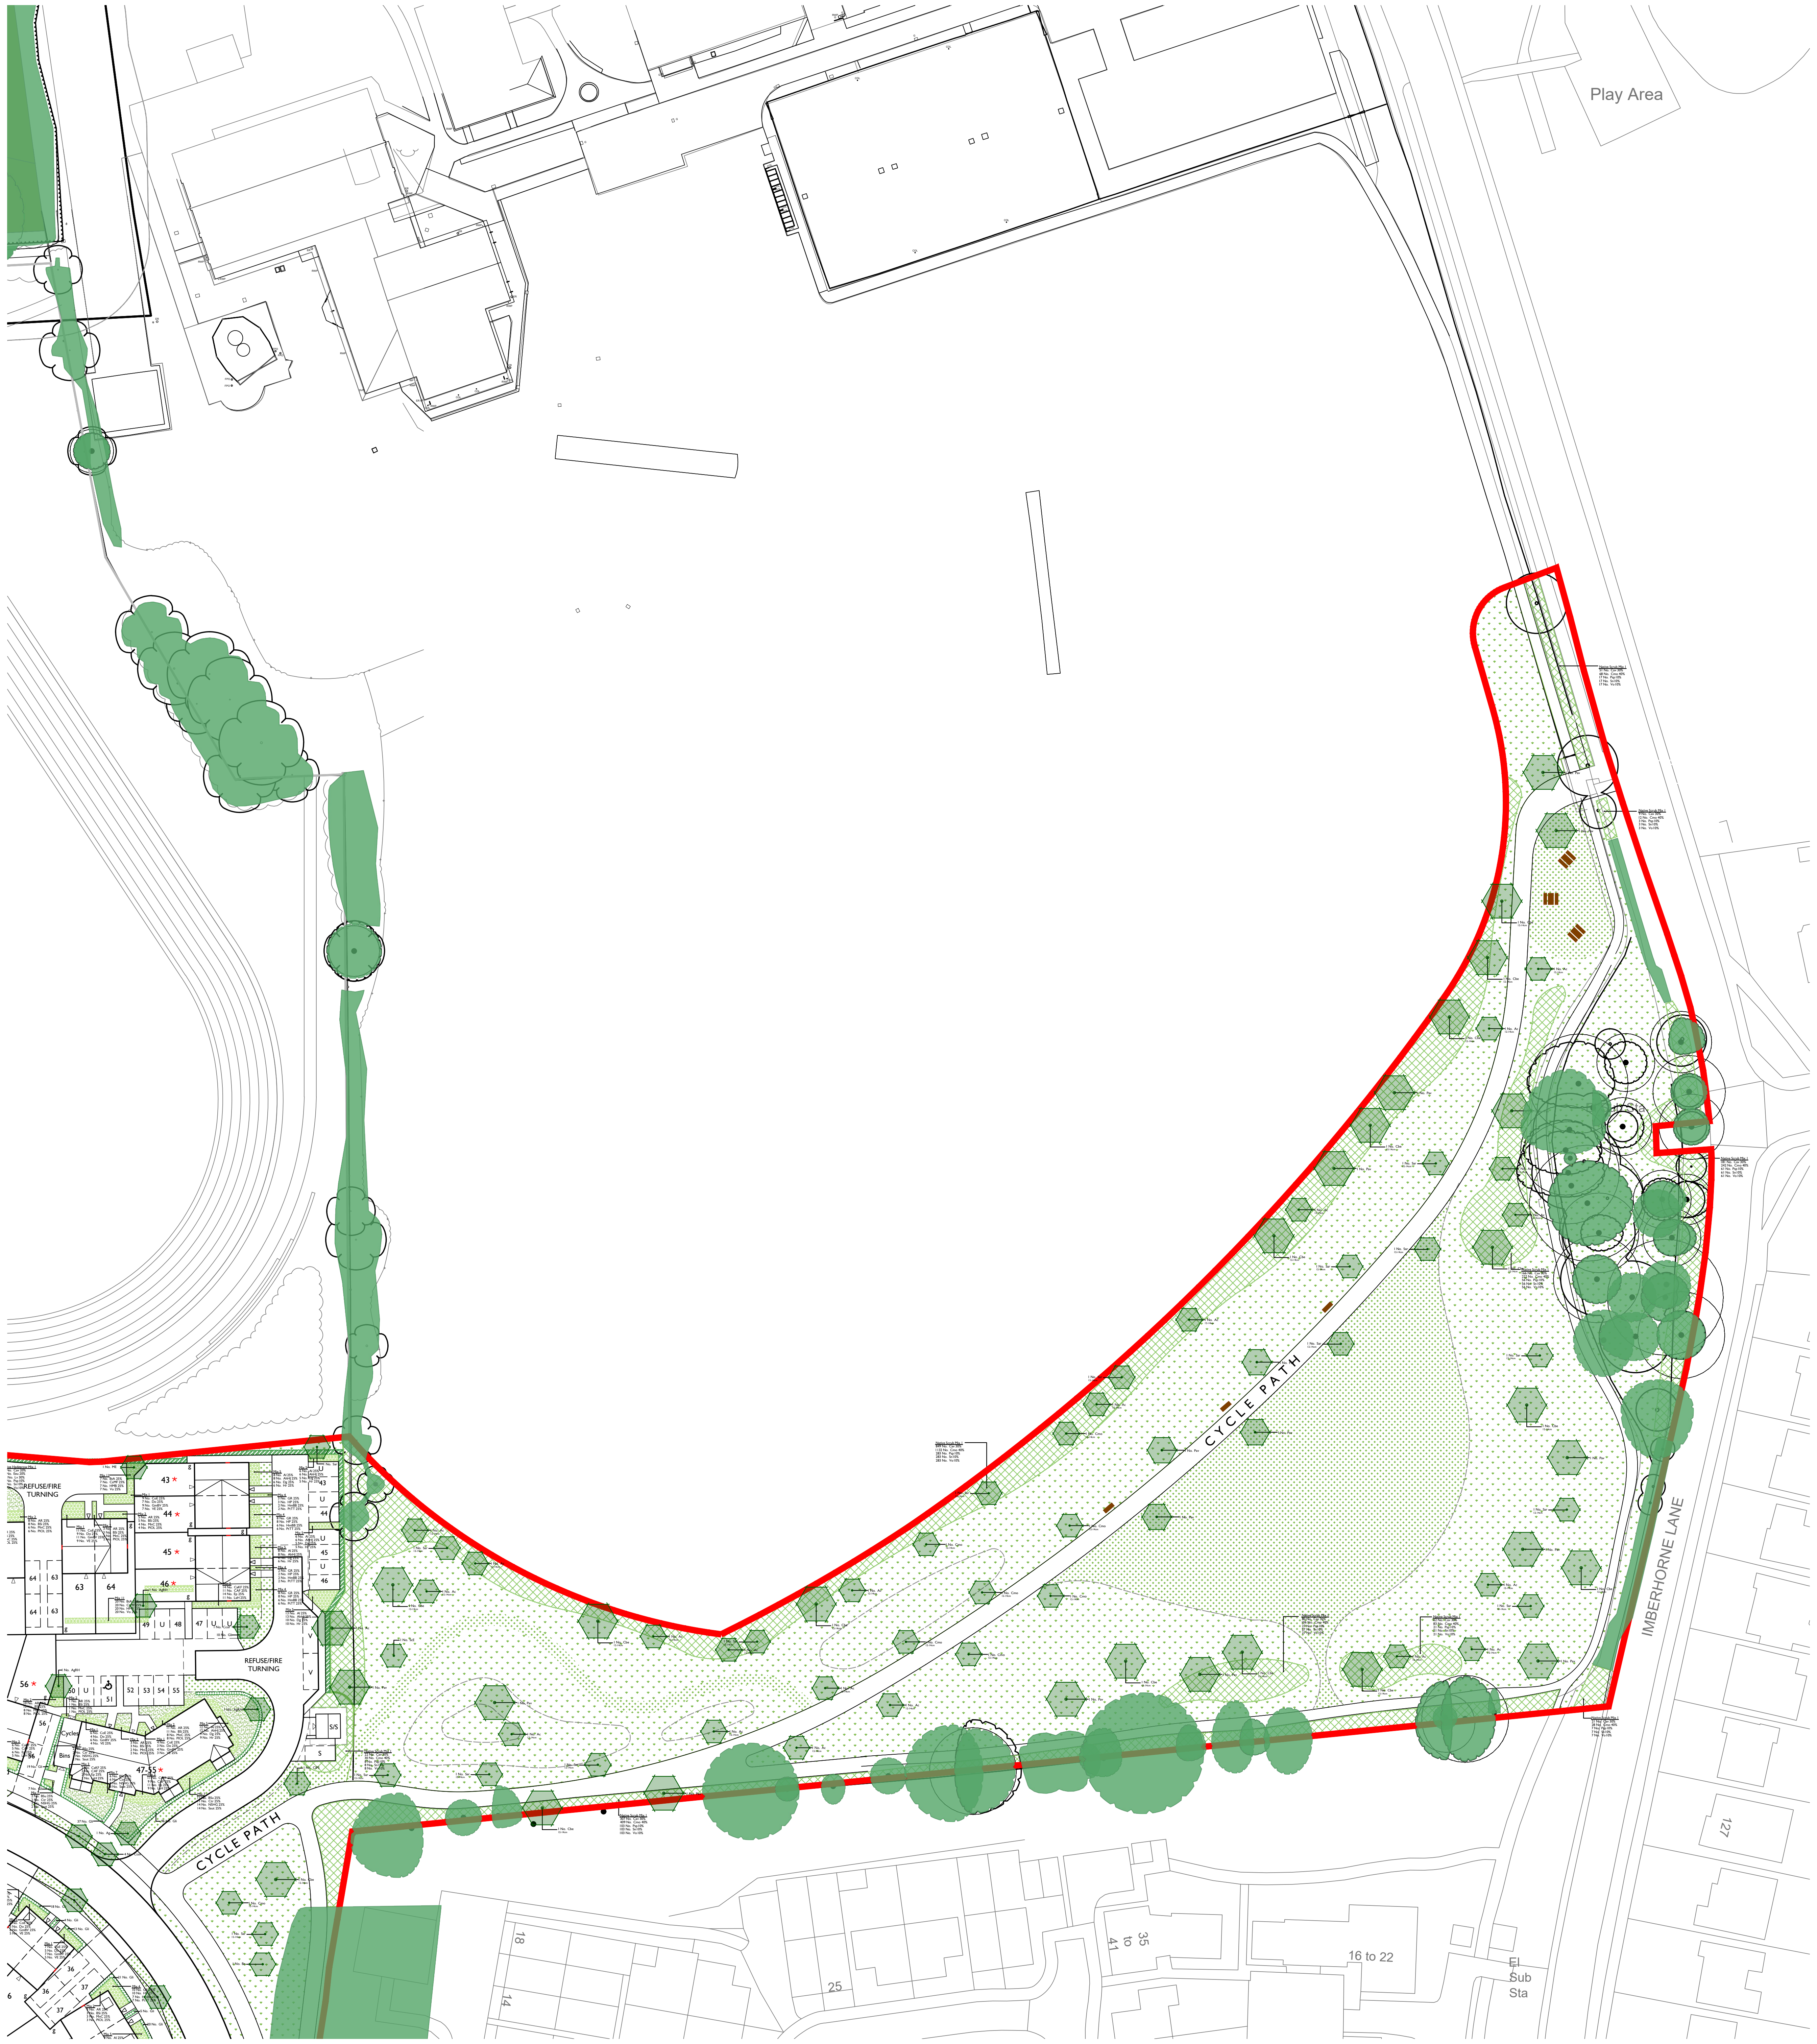

Plant schedule

Trees

Number	Abbreviation	Species	Height	Girth	Specification
93	Ac	Acer campestre	350-425cm	12-14cm	Heavy Standard :RB
9	Ac	Acer campestre	175-200cm		Feather :RB
5	Ac	Acer campestre	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
28	Ag	Acer griseum	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
24	ApEQ	Acer platanoides 'Emerald Queen'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
16	Agl	Alnus glutinosa	350-425cm	12-14cm	Heavy Standard :Clear Stem min. 200 :RB
33	AgRH	Amelanchier x grandiflora 'Robin Hill'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
89	Bn	Betula nigra	350-425cm	12-14cm	Heavy Standard :RB
9	Bn	Betula nigra	175-200cm		Feather :RB
52	Cbe	Carpinus betulus	350-425cm	12-14cm	Heavy Standard :RB
22	Cbe	Carpinus betulus	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
6	Cbe	Carpinus betulus	175-200cm		Feather :RB
11	Cav	Corylus avellana	175-200cm		Multi-Stemmed :RB
97	Ccol	Corylus colurna	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
1	ClPS	Crataegus laevigata 'Paul's Scarlet'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
78	Cmo	Crataegus monogyna	350-425cm	12-14cm	Heavy Standard :RB
14	Cmo	Crataegus monogyna	175-200cm		Feather :RB
30	GtS	Gleditsia triacanthos 'Skyline'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
2	LsW	Liquidambar styraciflua 'Worplesdon'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
81	Mk	Magnolia kobus	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
16	ME	Malus 'Evereste'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
49	Pav	Prunus avium	350-425cm	12-14cm	Heavy Standard :Clear Stem min. 200 :RB
26	Qr	Quercus robur	175-200cm	6-8cm	Light Standard :RB
6	Sar	Sorbus aria	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
51	Sar	Sorbus aria	300-350cm	12-14cm	Heavy Standard :Clear Stem 175-200 :RB
10	Sa	Sorbus aucuparia	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
3	ScE	Sorbus commixta 'Embley'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
20	TtB	Tilia tomentosa 'Brabant'	350-425cm	14-16cm	Extra Heavy Standard :Clear Stem min. 200 :RB
12	UNH	Ulmus 'New Horizon'	300-350cm	12-14cm	Heavy Standard :Clear Stem 175-200 :RB
Total :893					

Marginal / Aquatics

Number	Abbreviation	Species	Specification	Pot Size	Density
1563	Pau	Phragmites australis	Plug: Well Rooted		2/m²
Total :1563					

Native Scrub Mix 1

Number	Abbreviation	Species	Specification	Density	Percentage Contribution
12164	Cav	Corylus avellana	Bushy :BR	2/m²	30%
16210	Cmo	Crataegus monogyna	Transplant :Bushy :BR	2/m²	40%
4073	Psp	Prunus spinosa	Bushy :BR	2/m²	10%
4073	Sn	Sambucus nigra	Bushy :BR	2/m²	10%
4073	Vo	Viburnum opulus	Bushy :BR	2/m²	10%
Total :40593					

Native Hedgerow Mix 1

Number	Abbreviation	Species	Specification	Density	Percentage Contribution
1208	Cav	Corylus avellana	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	20%
1208	Eeu	Euonymus europaeus	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	20%
1803	Lv	Ligustrum vulgare	Bushy: BR	0.5Ctr Double Staggered at 0.5m offset	30%
609	Psp	Prunus spinosa	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
609	Sn	Sambucus nigra	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
609	Vo	Viburnum opulus	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
Total :6046					

Native hedgerow mix 2

Number	Abbreviation	Species	Specification	Density	Percentage Contribution
365	Ac	Acer campestre	Transplant :Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
365	Agl	Alnus glutinosa	Transplant :Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
365	Cav	Corylus avellana	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
1800	Cmo	Crataegus monogyna	Transplant :Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	50%
365	Psp	Prunus spinosa	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
365	Rca	Rosa canina	Bushy :BR	0.5Ctr Double Staggered at 0.5m offset	10%
Total :3625					

Single species hedgerow planting

Number of Plants	Abbreviation	Species	Specification	Height	Pot Size	Density
3164	Gli	Griselinia littoralis	Bushy :C	60-80cm	5L	0.5Ctr
188	EAB	Escallonia 'Apple Blossom'	Bushy :C	60-80cm	5L	0.5Ctr
2587	Lo	Ligustrum ovalifolium	Bushy :C	60-80cm	5L	0.5Ctr
1422	Ob	Osmanthus burkwoodii	Bushy :C	60-80cm	5L	0.5Ctr
Total :7361						

Mix 1

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
737	CoE	Carex oshimensis 'Evergold'	Full Pot	4/m²		5L	25%
570	Do	Daphne odora	Bushy :C	3/m²	30-40cm	5L	25%
737	GmBV	Geranium macrorrhizum 'Bevan's Variety'	Full Pot	4/m²		5L	25%
570	VE	Viburnum 'Eskimo'	Bushy :C	3/m²	30-40cm	5L	25%
Total :2614							

Mix 2

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
878	AR	Astrantia 'Roma'	Full Pot	4/m²		5L	25%
878	BSi	Bergenia 'Silberlicht'	Full Pot	4/m²		5L	25%
672	MnC	Mahonia nitens 'Cabaret'	Bushy :C	3/m²	30-40cm	5L	25%
672	PlOL	Prunus laurocerasus 'Otto Luyken'	Bushy :C	3/m²	30-40cm	5L	25%
Total :3100							

Mix 3

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
2221	CaKF	Calamagrostis x acutiflora 'Karl Foerster'	Full Pot	4/m²		5L	25%
1681	CAF	Cistus purpureus 'Alan Fradd'	Bushy :C	3/m²	30-40cm	5L	25%
2221	Ep	Echinacea purpurea	Full Pot	4/m²		5L	25%
1681	LaH	Lavandula angustifolia 'Hidcote'	Bushy :C	3/m²	30-40cm	5L	25%
Total :7804							

Mix 4

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
1140	GR	Geranium Rozanne	Full Pot	4/m²		5L	25%
1140	HP	Heuchera 'Paris'	Full Pot	4/m²		5L	25%
880	HmBB	Hydrangea macrophylla 'Blue Bird'	Bushy :C	3/m²	30-40cm	5L	25%
880	PtTT	Pittosporum tenuifolium 'Tom Thumb'	Bushy :C	3/m²	30-40cm	5L	25%
Total :4040							

Mix 5

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
1162	Al	Anemanthele lessoniana	Full Pot	4/m²		5L	25%
1162	AhHJ	Anemone x hybrida 'Honorine Jobert'	Full Pot	4/m²		5L	25%
898	Dg	Deutzia gracilis	Bushy :C	3/m²	30-40cm	5L	25%
898	Hr	Hebe rakaiensis	Bushy :C	3/m²	30-40cm	5L	25%
Total :4120							

Mix 6

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
257	CID	Carex 'Ice Dance'	Full Pot	4/m²		5L	25%
257	GeWP	Geranium endressii 'Wargrave Pink'	Full Pot	4/m²		5L	25%
198	Shh	Sarcococca hookeriana humilis	Bushy :C	3/m²	30-40cm	5L	25%
198	ScKG	Skimmia confusa 'Kew Green'	Bushy :C	3/m²	30-40cm	5L	25%
Total :910							

Mix 7

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
765	BSu	Brachyglottis 'Sunshine'	Bushy :C	3/m²	30-40cm	5L	25%
765	Ctr	Ceanothus thyrsiflorus repens	Bushy :C	3/m²	30-40cm	5L	25%
993	NSHG	Nepeta 'Six Hills Giant'	Full Pot	4/m²		5L	25%
993	Saut	Sesleria autumnalis	Full Pot	4/m²		5L	25%
Total :3516							

Mix 8

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
645	AcM	Achillea 'Moonshine'	Full Pot	4/m²		5L	25%
645	CaKF	Calamagrostis x acutiflora 'Karl Foerster'	Full Pot	4/m²		5L	25%
645	LaH	Lavandula angustifolia 'Hidcote'	Bushy :C	4/m²	30-40cm	5L	25%
499	SjAW	Spiraea japonica 'Anthony Waterer'	Bushy :C	3/m²	30-40cm	5L	25%
Total :2434							

Mix 9

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
726	Al	Anemanthele lessoniana	Full Pot	4/m²		5L	25%
566	HMW	Hebe 'Mrs Winder'	Bushy :C	3/m²	30-40cm	5L	25%
566	HmV	Hydrangea macrophylla 'Veitchii'	Bushy :C	3/m²	30-40cm	5L	25%
726	SAJ	Sedum 'Autumn Joy'	Full Pot	4/m²		5L	25%
Total :2584							

Mix 10

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
687	Amo	Alchemilla mollis	Full Pot	4/m²		5L	25%
529	CWD	Choisya 'White Dazzler'	Bushy :C	3/m²	30-40cm	5L	25%
529	FMP	Fuchsia 'Mrs Popple'	Bushy :C	3/m²	30-40cm	5L	25%
687	Hr	Hebe rakaiensis	Bushy :C	4/m²	30-40cm	5L	25%
Total :2432							

Mix 11

Number	Abbreviation	Species	Specification	Density	Height	Pot Size	Percentage Contribution
1187	BtA	Berberis thunbergii 'Atropurpurea'	Bushy :C	3/m²	30-40cm	5L	25%
1187	CsMF	Cornus sanguinea 'Midwinter Fire'	Bushy :C	3/m²	30-40cm	5L	25%
1187	HMB	Hebe 'Midsummer Beauty'	Bushy :C	3/m²	30-40cm	5L	25%
1187	Vo	Viburnum opulus	Bushy :C	3/m²	30-40cm	5L	25%
Total :4748							

LEGEND

🟥	Site boundary
●	Existing tree to be retained and protected. Refer to arboricultural information for further detail
🟩	Existing vegetation and/or hedgerow to be retained and protected. Refer to arboricultural information for further detail
▨	Existing grassland to be retained and protected. Where disturbed to be seeded in line with proposed grassland seed mix as specified.

Proposed soft landscaping

⬡	Tree planting, refer to detail GLS_080_127_1700
▭	Ornamental hedge - Single row 0.9m high
▨	Double staggered mixed native hedgerow To be planted in groups of 7-9no. of each species
▨	Ornamental shrub planting
▩	Native scrub planting mix To be planted in groups of 7-9no. of each species
⁘	Good quality hardwearing lawn
+	Mown species rich grassland Verges laid with species rich turf from Wildflower Turf or similar, remaining areas seeded with EL1 Flowering Lawn Mixture from Emorsgate or similar seeded at 4g/m2
×	Wildflower meadow EM4 Meadow Mixture for Clay Soils from Emorsgate or similar seeded at 4g/m2
⁂	Wetland meadow EM8 Meadow Mixture for Wetlands from Emorsgate or similar seeded at 4g/m2
↓	Species rich neutral grassland Verges laid with species rich turf from Wildflower Turf or similar, remaining areas seeded with EL1 Flowering Lawn Mixture from Emorsgate or similar seeded at 4g/m2

NOTES:
1. For Planting Schedule refer to drawing GLS_080_127_1517

To be read in conjunction with:
- Landscape general arrangement plan GLS_080_127_1300
- Detailed hard landscape plans GLS_080_127_1600-series
- Tree planting construction detil GLS_080_127_1700
- Landscape specification GLS_080_127_1801
- Landscape management plan GLS_080_127_1802

SHEET LAYOUT

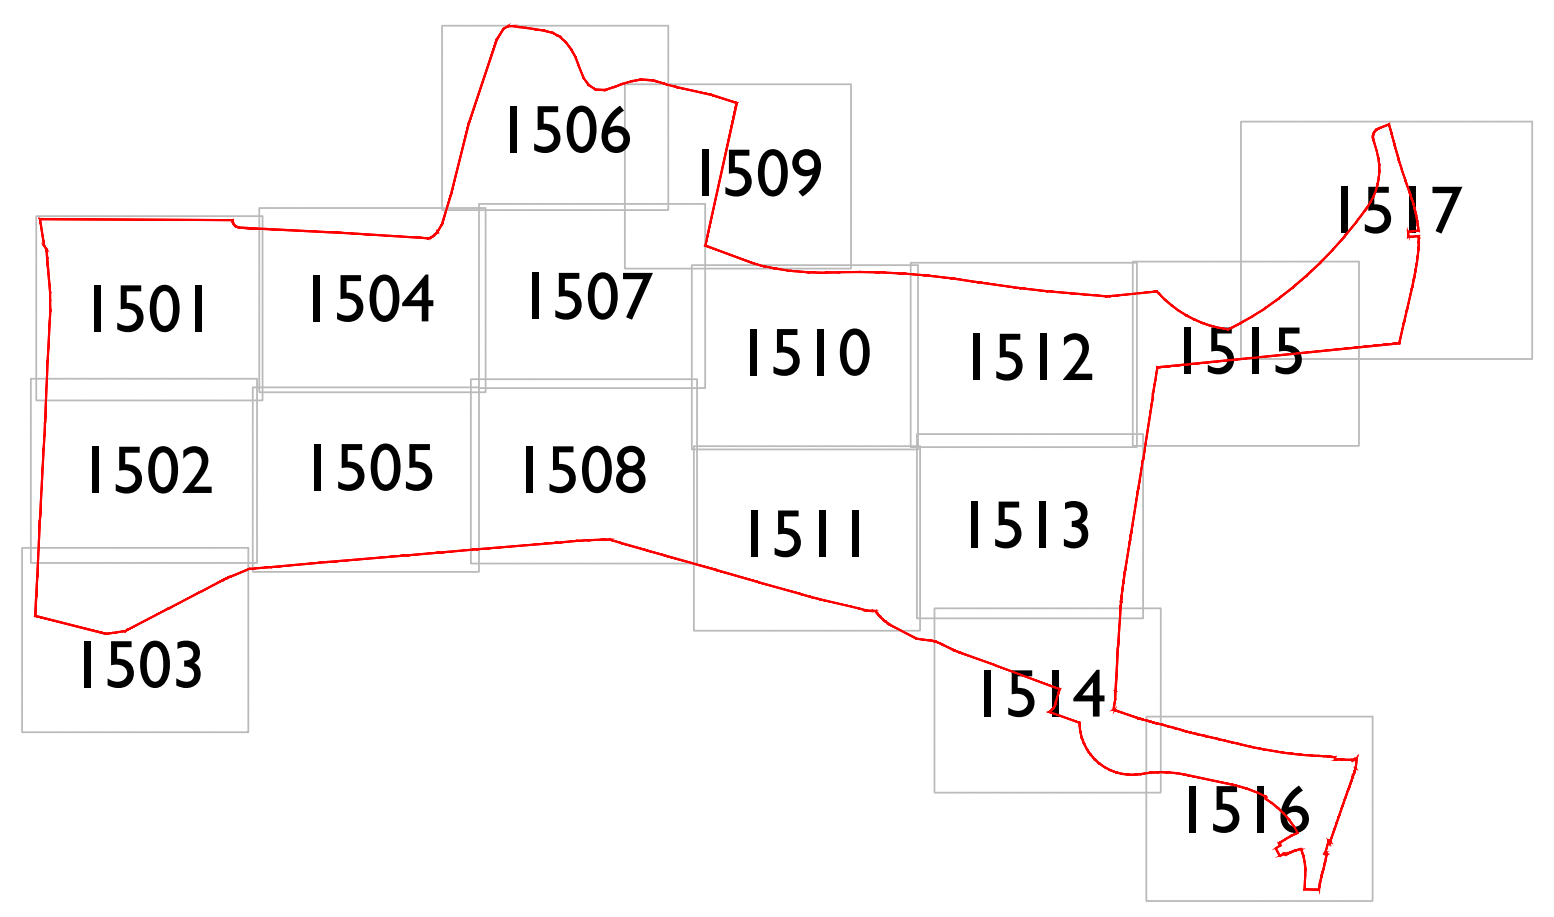

FOR PLANNING

Scale @ A0:
0 1 2 3 4 5 6 7 8 9 10m
Scale 1:200
NORTH

Rev	Date	Drawn	Checked
A	17.12.25	RA	AE
Updated in line with revised layout			
B	13.01.26	AE	JM
Updated in line with revised layout + surface treatment comments			

Date: 11.12.25

Drawn by : LM
Checked by : AE

Drg No: GLS_080_127_1517
Rev: B

Project:
Land West of Imberhorne Lane
East Grinstead

Title:
Planting Plan
Sheet 17

Client:
Vistry Homes
DAVID WILSON HOMES
BARRATT HOMES

GREENLANDSCAPE STUDIO

Green Landscape Studio Limited - The Lakeside Centre, Lakeside Country Park, Wide Lane, Eastleigh, Hampshire - Telephone 01276 450039 - www.gl-studio.co.uk

This drawing and the works depicted are the copyright of Green Landscape Studio Ltd. and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.