



The Portchester-Hood 15W is a classic and stylish IP65 / IK08 rated vandal resistant circular LED bulkhead.

Manufactured from die-cast aluminium and fitted with a strong UV stabilised polycarbonate lens, the Portchester remains robust whilst offering a subtle diffused light.

Options include Dali, Microwave Sensor and Emergency.



Portchester Hood 15W - LED Bulkhead

Wall Mounted Lighting




Features & Benefits

- LED rating 1,782lm (4K & 6K).
- LED rating 1,508lm (3K).
- Luminaire flux 1,301lm (4K & 6K).
- Luminaire flux 1,101lm (3K).
- Total wattage 15W.
- Warm White (3K), Neutral White (4K) and Cool White (6K) colour temperature options.
- IP65 / IK08 rated.
- -20 to +40°C operating temperature (Emergency 0 to +40°C).
- Long life span > 65,000hrs.
- High power LED and Osram Driver.
- Options include Dali, Microwave Sensor and Emergency.
- Hood eyelid cover allows additional impact resistance and reduces upwards light.
- UV stabilised polycarbonate lens for subtle diffused lighting.
- Tamper proof fixings for increased vandal resistance.
- Die-cast aluminium body and strong UV stabilised polycarbonate lens.
- Rear cable entry.



Tamper Proof Fixings.

Applications

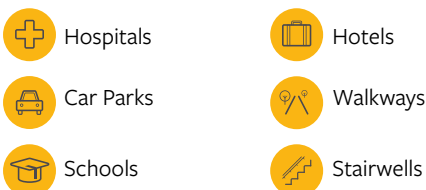

Kelvin Options




Painted Options



NB: additional RAL colours on request.

Dimensions

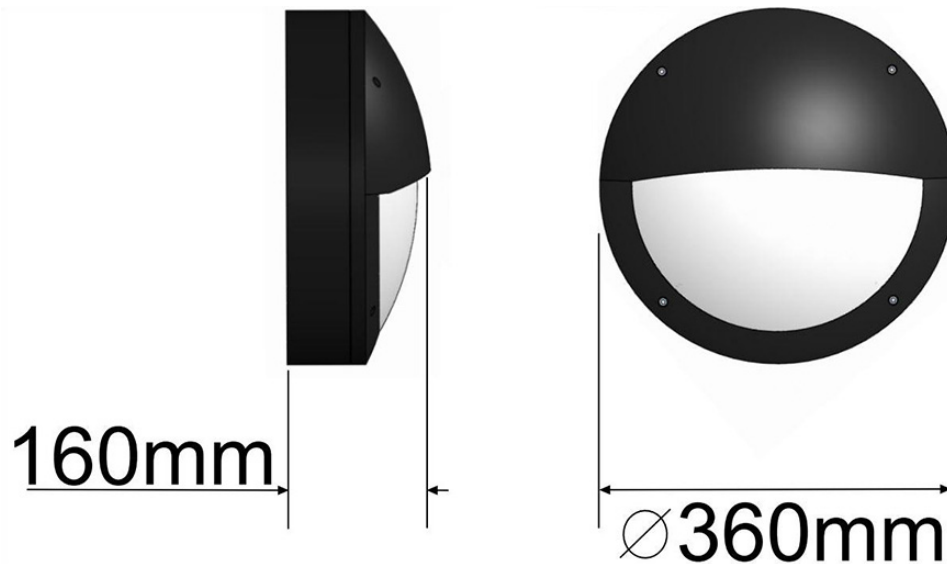

Specifications

Portchester Hood 15W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Face
Standard - Black													
PH15-A3C-00B	Portchester-Hood-15W-LED-AC-6K-Std-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	3.7	Black	Hood
PH15-A3N-00B	Portchester-Hood-15W-LED-AC-4K-Std-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	3.7	Black	Hood
PH15-A3W-00B	Portchester-Hood-15W-LED-AC-3K-Std-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	3.7	Black	Hood
Standard - Black - Microwave Sensor													
PH15-A3C-02B	Portchester-Hood-15W-LED-AC-6K-Std-MW-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	3.9	Black	Hood
PH15-A3N-02B	Portchester-Hood-15W-LED-AC-4K-Std-MW-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	3.9	Black	Hood
PH15-A3W-02B	Portchester-Hood-15W-LED-AC-3K-Std-MW-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	3.9	Black	Hood
Standard - Black - Emergency													
PH15-A3C-01B	Portchester-Hood-15W-LED-AC-6K-Std-E3-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	4.2	Black	Hood
PH15-A3N-01B	Portchester-Hood-15W-LED-AC-4K-Std-E3-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	4.2	Black	Hood
PH15-A3W-01B	Portchester-Hood-15W-LED-AC-3K-Std-E3-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	4.2	Black	Hood
Standard - Black - Microwave Sensor - Emergency													
PH15-A3C-03B	Portchester-Hood-15W-LED-AC-6K-Std-MW-E3-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	4.4	Black	Hood
PH15-A3N-03B	Portchester-Hood-15W-LED-AC-4K-Std-MW-E3-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	4.4	Black	Hood
PH15-A3W-03B	Portchester-Hood-15W-LED-AC-3K-Std-MW-E3-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	4.4	Black	Hood

(table continued overleaf)

Specifications (Continued)

Portchester Hood 15W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Face
Dali - Black													
PH15-A3C-20B	Portchester-Hood-15W-LED-AC-6K-Dali-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	3.7	Black	Hood
PH15-A3N-20B	Portchester-Hood-15W-LED-AC-4K-Dali-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	3.7	Black	Hood
PH15-A3W-20B	Portchester-Hood-15W-LED-AC-3K-Dali-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	3.7	Black	Hood
Dali - Black - Microwave Sensor													
PH15-A3C-22B	Portchester-Hood-15W-LED-AC-6K-Dali-MW-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	3.9	Black	Hood
PH15-A3N-22B	Portchester-Hood-15W-LED-AC-4K-Dali-MW-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	3.9	Black	Hood
PH15-A3W-22B	Portchester-Hood-15W-LED-AC-3K-Dali-MW-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	3.9	Black	Hood
Dali - Black - Dali/Emergency													
PH15-A3C-21B	Portchester-Hood-15W-LED-AC-6K-Dali-Dali/E3-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	4.2	Black	Hood
PH15-A3N-21B	Portchester-Hood-15W-LED-AC-4K-Dali-Dali/E3-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	4.2	Black	Hood
PH15-A3W-21B	Portchester-Hood-15W-LED-AC-3K-Dali-Dali/E3-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	4.2	Black	Hood
Dali - Black - Microwave Sensor - Dali/Emergency													
PH15-A3C-23B	Portchester-Hood-15W-LED-AC-6K-Dali-MW-Dali/E3-Black	LED	1,782	15	6K	Ra>70	220-240	350	1,426	95	4.4	Black	Hood
PH15-A3N-23B	Portchester-Hood-15W-LED-AC-4K-Dali-MW-Dali/E3-Black	LED	1,782	15	4K	Ra>70	220-240	350	1,426	95	4.4	Black	Hood
PH15-A3W-23B	Portchester-Hood-15W-LED-AC-3K-Dali-MW-Dali/E3-Black	LED	1,508	15	3K	Ra>80	220-240	350	1,206	80	4.4	Black	Hood

Legend: **Std** = Standard. **E3** = Emergency. **MW** = Microwave Sensor. **Dali** = Dali Driver. **Dali/E3** = Dali Emergency.

3K = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

Options: **Grey Housing** = Change B to G.

Photometric Data

To access our photometric data, visit: bit.ly/3BaSfio.



Gemma Lighting Ltd,
Unit 3, Marshlands Spur, Farlington,
Portsmouth, Hampshire, UK, PO6 1RX.

www.gemmalighting.com

+44 (0) 2392 315 911

Need a Lighting Design?

We offer a free of charge design service, contact our team today:
studio@gemmalighting.com.

Disclaimer: Information correct at the time of publication; V220912.